



www.fleet.vdo.com

Digital tachograph - DTCTO 4.1®

Instruction manual for contractors and drivers

EN

VDO
Smart on the Road

Legal notice

Described product

- Digital tachograph DTCO 1381 Release 4.1 (DTCO 4.1).

Manufacturer

Continental Automotive Technologies GmbH
P.O. Box 1640
78006 Villingen-Schwenningen
Germany
www.fleet.vdo.com

Original operating instructions

© 2023-01
Continental Automotive Technologies GmbH

This work is protected by copyright. The rights arising from this copyright remain with Continental Automotive Technologies GmbH.

Reprinting, translations and reproductions are not permitted unless authorised in writing by the manufacturer.

This is an original document of Continental Automotive Technologies GmbH.

Trademark:

- DTCO® and KITAS® are registered trademarks of Continental Automotive Technologies GmbH
- Bluetooth® is a registered trademark of Bluetooth SIG, Inc.

Any other trademarks which may be registered are used without special reference to the owner.

Contents

Legal notice	2	2.3 Intended use	18
1 About this document	9	3 Device description	20
1.1 Data protection	9	3.1 Display and operational elements	20
1.1.1 Personal ITS data	10	3.2 Features	20
1.1.2 Personal VDO data	10	3.3 Details to the display and operating elements	20
1.2 Designations	10	3.3.1 Display (1)	21
1.3 Function of this document	11	3.3.2 Menu buttons (2)	21
1.4 Target group	11	3.3.3 Card drawer 1 (3)	21
1.4.1 Storage	11	3.3.4 Driver 1 combination button (4)	21
1.4.2 Contact person	11	3.3.5 Driver 2 combination button (5)	21
1.5 Symbols and signal words	11	3.3.6 Card drawer 2 (6)	21
1.6 Additional information	12	3.3.7 Tear-off edge (7)	21
1.6.1 Quick guide	12	3.3.8 Printer drawer (8)	21
1.6.2 Information via the internet	12	3.3.9 Front interface (9)	22
2 For your safety	14	3.4 Key settings (overview)	22
2.1 Basic safety information	14	3.5 Bluetooth	22
2.1.1 DTCO 4.1 ADR (ex variant)	15	3.6 Stand-by mode (display)	23
2.2 Legal requirements	15	3.6.1 Exiting stand-by mode	23
2.2.1 Driver card: Obligations of the driver	16	3.7 ADR version (Ex version)	23
2.2.2 Departure from legal requirements	17	3.7.1 Special safety instructions	24
2.2.3 Obligations of the contractor	17	3.7.2 Particularities in relation to the operation ...	24
		3.8 Operating modes (overview)	24
		3.9 Tachograph card (overview)	25
		3.9.1 Driver card	26

3.9.2	Company card	26
3.9.3	Control card.....	27
3.9.4	Workshop card	27
3.9.5	Access rights of the tachograph cards	27
3.10	Saved data.....	28
3.10.1	Driver card.....	29
3.10.2	Company card	29
3.10.3	Mass memory (in the device)	30
3.11	Border crossing.....	30
3.12	Time zones	30
3.13	Pictograms (overview)	31
3.14	Country symbols	36
3.14.1	Spanish regions	37
3.15	Automatic activities after ignition on/off (default)	37
4	Operation (general).....	40
4.1	Displays	40
4.1.1	Display after ignition on	40
4.1.2	Displays during journey	40
4.1.3	Messages	42
4.1.4	Display after ignition off.....	42
4.2	Navigating within menus.....	42
4.2.1	Menus while vehicle is stationary	42
4.3	Inserting card	42
4.3.1	Language	44

4.4	Removing the card	44
4.5	Handling of the cards.....	45
4.6	Downloading data.....	45
4.6.1	From driver or company card	46
4.6.2	Data identification.....	46
4.6.3	Downloading from the mass memory.....	47
4.6.4	Remote-controlled download (option)	47

5 Operation by the driver 49

5.1	Driver card functions.....	49
5.2	Shift start – Inserting driver card	49
5.2.1	1. Inserting card	49
5.2.2	2. Setting activity	52
5.2.3	Country entry – manual.....	53
5.2.4	Aborting the entry procedure.....	54
5.3	Setting activities.....	54
5.3.1	Possible activities.....	55
5.3.2	Changing activities	55
5.3.3	Automatic setting.....	55
5.3.4	Recording activities manually.....	56
5.4	Load/unload (cabotage).....	56
5.5	Shift end – removing driver card.....	57
5.6	Manual entries (entry/addition)	58
5.6.1	Card requests during the manual entry	59
5.6.2	Adding activity rest time	60

5.6.3	Continuing activities	61	7.2	Second menu level – menu functions.....	82
5.6.4	Continuing activities and preceding others with activities	62	7.2.1	Menu structure (overview).....	83
5.7	Driver / vehicle change	62	7.2.2	Navigating within menu functions.....	84
5.7.1	Case 1 – Crew operation	63	7.2.3	Menu access lock.....	86
5.7.2	Case 2 – Shift end.....	63	7.2.4	Leaving menu functions	86
5.7.3	Case 3 – Mixed operation	63	7.2.5	Menu point printout driver 1/ driver 2	87
5.8	Inserting driver card for the first time	64	7.2.6	Menu point printout vehicle	88
5.8.1	Data usage	64	7.2.7	Menu point Entry driver 1/driver 2.....	91
5.8.2	Registration process	64	7.2.8	Menu point entry vehicle	94
6	Operation by the contractor	67	7.2.9	Menu point display driver 1/ driver 2	98
6.1	Functions of the company card.....	67	7.2.10	Menu point display vehicle	99
6.2	Menu functions in the company mode	68	8	Messages	102
6.3	Registration – inserting company card	68	8.1	Meaning of messages	102
6.4	Inserting member state and vehicle registration number	70	8.1.1	Characteristics of the messages	102
6.5	Removing company card	72	8.1.2	Acknowledgement of messages	103
7	Menus	75	8.2	Special messages	103
7.1	First menu level – Standard values	75	8.2.1	Production status	103
7.1.1	Display in stationary vehicle	75	8.2.2	OUT (out of scope of regulation).....	104
7.1.2	Display the times of the driver card	76	8.2.3	Ferry/train.....	104
7.1.3	Setting the language	76	8.3	Overview of possible events	104
7.1.4	VDO Counter (option)	77	8.4	Overview of possible malfunctions	107
			8.5	Driving time warnings	110
			8.5.1	VDO Counter display (option)	111
			8.6	Overview of possible operational notes	112
			8.6.1	Operational notes as information	115

9 Print.....	118		
9.1 Notes for printing	118	10.3 Explanation to the printouts	130
9.2 Starting print	118	10.3.1 Key to the data blocks	131
9.3 Cancel print.....	118	10.4 Data set for events or faults.....	139
9.4 Replacing the printer paper	119	10.4.1 Coding of data set purpose	140
9.4.1 End of paper.....	119	10.4.2 Coding for more detailed description	142
9.4.2 Replacing the paper roll	119	11 Maintenance and inspection obligation	144
9.5 Clear paper jam	120	11.1 Cleaning	144
10 Printouts	122	11.1.1 Cleaning the DTCO 4.1	144
10.1 Retaining printouts	122	11.1.2 Cleaning tachograph card	144
10.2 Printouts (examples).....	122	11.2 Compulsory inspection	144
10.2.1 Daily printout of the driver card	122	12 Troubleshooting	147
10.2.2 Events / faults from the driver card	124	12.1 Data backup by the workshop	147
10.2.3 Daily printout of the vehicle	124	12.2 Overvoltage/undervoltage	147
10.2.4 Events / faults from the vehicle	126	12.2.1 Power interruption	148
10.2.5 Speeding events	127	12.3 Error card communication	148
10.2.6 Technical data	127	12.4 Printer drawer defect	149
10.2.7 Driver activities	128	12.5 Automatic ejection of tachograph card	149
10.2.8 v-diagram	128	13 Technical data.....	151
10.2.9 Status D1/D2 diagram (option).....	128	13.1 DTCO 4.1	151
10.2.10 Speed profiles (option).....	129	13.2 Paper roll	152
10.2.11 Rotation frequency profiles (option)	129	14 Appendix	154
10.2.12 Inserted tachograph cards	129		
10.2.13 Printout in local time	130		

14.1 Declaration of conformity/Authorisations	154
14.2 Optional accessories	160
14.2.1 DLKPro Download Key S	161
14.2.2 DLKPro TIS-Compact S	161
14.2.3 Remote DL 4G	161
14.2.4 Cleaning cards and cleaning wipes.....	162
14.3 VDO online shop.....	162
15 Change overview	164
15.1 Release overview	164
Index	165

About this document

Data protection

Designations

Function of this document

Target group

Symbols and signal words

Additional information

About this document

■ Data protection

Regulation (EU) 165/2014 and Implementation Regulation (EU) 2016/799 as amended place several requirements on the DTCO 4.1 in terms of data protection. In addition, the DTCO 4.1 fulfils the requirements of the General Data Protection Regulation (EU) 2016/679, as amended.

This particularly affects:

- The driver's consent to the processing of personal ITS data → *Personal ITS data* [▶ 10]
- The driver's consent to the processing of personal VDO data → *Personal VDO data* [▶ 10]

The first time the driver card is inserted into the DTCO 4.1, the equipment will prompt whether the driver consents to the processing of his personal data.

IMPORTANT

Further information relating to data protection, particularly with respect to data collection and data usage, are available from your employer and/or client. Please note that Continental Automotive Technologies GmbH acts solely as a processor in accordance with your employer/client.

IMPORTANT

Please note that any given consent can be revoked at any time. Any data processing based on your consent carried out up to the revocation is not affected by this.
→ *Changing settings to personal ITS data* [▶ 92]
→ *Changing settings to personal VDO data* [▶ 93]

IMPORTANT

The data is saved in the tachograph and, after reaching the maximum data volume, systematically overwritten one by one, starting with the oldest entries – after one year at the earliest.

External devices communicating with the tachograph can access the data described below, provided the driver has consented to the recording.

IMPORTANT

Further data protection information regarding personal data can be found under <https://www.fleet.vdo.de/meta-navigation/faq/>.

► Personal ITS data

Personal ITS data (ITS: Intelligent Transport System) include, for example:

- Driver's first and last name
- Driver card number
- Date of birth

Consent on first insertion of the driver card → *Registration process* [► 64]

► Personal VDO data

The following personal additional data is recorded:

- D1/ D2-Status inputs
- Engine speed profiles
- Speed profiles
- the 4 Hz speed signal

Consent on first insertion of the driver card → *Registration process* [► 64]

IMPORTANT

For further information about data collection, please contact your employer.

■ Designations

The following designations apply in these operating instructions:

- The DTCO 1381 Release 4.1 is referred to below as DTCO 4.1.
- The **front interface** → *Display and operational elements* [► 20] of the DTCO 4.1 is used for downloading data and parameterising the DTCO 4.1.
- The **AETR Agreement** (Accord Européen sur les Transports Routiers) specifies provisions for the driving and rest times for cross-border transport. It therefore also forms part of these instructions.
- **Mixed operation** Mixed operation Means the mixed use of vehicles with analogue and digital tachographs.

- **Crew operation** Means a journey with 2 drivers.
 - Driver 1 = the person driving the vehicle.
 - Driver 2 = the person not driving the vehicle.
- **Mass memory** is the data memory in the device.
- **Out** (Out of Scope) throughout these instructions means leaving the scope of a regulation.

■ Function of this document

These are the operating instructions outlining the correct use in compliance with the operation specified in Regulation (EU) 165/2014 of the digital tachograph DTCO 4.1.

The operating instructions are to assist you in complying with the legal regulations in connection with the DTCO 4.1.

This document is valid for the DTCO 4.1. It is not valid for older device generations.

■ Target group

This instruction manual is aimed at drivers and contractors.

Please read the manual carefully and familiarise yourself with the device.

► Storage

Please always have this manual at hand in your vehicle.

► Contact person

If you have any questions or requests, please contact your authorised specialist workshop or service partner.

■ Symbols and signal words

RISK OF EXPLOSION!

The note EXPLOSION RISK refers to an **imminent** danger of explosion.

Non-compliance may result in severe injury or death.

WARNING

The note WARNING refers to **possible** danger.

Non-compliance may result in serious injuries or death.

CAUTION

The note CAUTION refers to the risk of minor injuries.

Non-compliance may result in minor injuries.

ATTENTION

The note ATTENTION contains important information to avoid data loss, prevent damage to the device and comply with legal requirements.

IMPORTANT

A NOTE provides you with advice or information which, if not adhered to, could result in malfunctions.

■ Additional information

► Quick guide

- The purpose of the “driver quick guide” is to provide a quick overview of the essential operating steps.

► Information via the internet

The following is available in the internet under www.fleet.vdo.com:

- Further information on the DTCO 4.1
- An app to operate the DTCO 4.1 via Bluetooth
- Information on the third party licence
- These operating instructions in pdf format
- Contact addresses
- Requirements for external GNSS antennas run with the DTCO 4.1

For your safety

Basic safety information

Legal requirements

Intended use

For your safety

■ Basic safety information

WARNING

Distraction due to device messages

There is a risk of distraction if messages are displayed on the device while driving or if the card is automatically ejected.

- Do not let yourself get distracted by this, but focus all of your attention on the traffic.

CAUTION

Risk of injury at the card drawer

You and others may sustain an injury on an open card drawer.

- Only open the card drawer to insert or remove a tachograph card.

ATTENTION

Carry out training on the DTCO 4.1

Pursuant to Regulation (EU) 165/2014, road transport operators are obliged to train their drivers in the use of digital tachographs and to provide proof of such training.

Failure to comply can result in a fine and extended liability in the event of damage.

- Have your drivers attend regular training.

ATTENTION

Avoid damage to the DTCO 4.1

In order to prevent the DTCO 4.1 from getting damaged, please note the following points:

- Authorised persons installed and sealed the DTCO 4.1. Do not carry out any repairs at the DTCO 4.1 and the supply lines.
- Insert only the corresponding tachograph cards into the card drawer.
- Use only paper rolls with approval mark which have been approved and recommended by the manufacturer (original VDO printer paper).
➔ *Replacing the printer paper*
[▶ 119]
- Do not use sharp or pointed objects to operate the keys.

! ATTENTION**Do not damage sealings and seals**

Otherwise, the DTCO 4.1 is in non-compliant condition and the data is no longer reliable.

! ATTENTION**Do not manipulate data**

It is forbidden to falsify, suppress or destroy tachograph recordings, the tachograph cards and the printed documents.

! ATTENTION**Do not change the DTCO 4.1 and surroundings**

- Any person making changes to the tachograph or the signal feed in a way that influences the recording

and memory of the tachographs, especially if done with fraudulent intentions, violates legal regulations.

- It is not permitted to carry out any changes within 80 mm, especially through devices with magnetic radiation (e.g. DVD players). It is not permitted to attach any metallic or electric parts.
- When operating devices which are not part of the vehicle's standard equipment, it must be ensured that they do not interfere with the function (especially the GNSS reception) of the tachograph . This may result in corresponding entries in the error memory (tachograph, driver card).

► DTCO 4.1 ADR (ex variant)

For better clarity, all details (particularities in relation to the operation and relevant safety information) regarding the ex version ADR have been summarised in one single chapter.

⚠ RISK OF EXPLOSION!**Risk of explosion due to residual voltages and open interfaces**

In explosive areas, operating the buttons of the DTCO 4.1, inserting cards, opening the printer drawer or opening the front interface, posts an explosion risk.

- Please observe the instructions for the transport and handling of hazardous goods in explosive environments.

➔ *ADR version (Ex version) [► 23]*

■ Legal requirements

⚠ ATTENTION

Legal requirements of other countries

This instruction manual does not list the legal requirements of individual countries, and these must also be observed.

The use of tachographs is regulated by the following regulations and directives:

- Regulation (EU) 165/2014
- Regulation (EC) 561/2006
- Directive 2006/22/EC

The most recent versions apply.

By means of these Regulations, the European Parliament assigns a number of duties and responsibilities to the driver of the vehicle as well as to its owner (contractor).

In addition, the respective national laws must also be observed.

Without any claim to completeness or validity, the following key points can be highlighted:

► Driver card: Obligations of the driver

- The driver must ensure that the driver card and the tachograph will be used properly.
- Behaviour in the event of malfunctions of the tachograph:
 - Continuing the journey is possible in exceptional cases.
The driver must write down on a separate sheet or on the back of the printout any details about the activities which are no longer properly recorded or printed by the tachograph.
➔ *Recording activities manually* [► 56]
 - If a return to the contractor's site cannot occur within a week, the tachograph must be repaired during the journey by an authorised specialist workshop.

- Documents to be carried during mixed operation (use of vehicles with record sheet and digital tachograph):

- Driver card
- Daily printouts
- Tachograph charts
- Hand-written records
➔ *Driver / vehicle change* [► 62]

IMPORTANT

A printable version of the form is available in the Internet.

- In case of loss, theft, damage or malfunction of the driver card:
The driver must create a daily printout at the start and at the end of the journey and include personal details. If necessary, the availability and other working times must be amended by handwritten entries.
➔ *Recording activities manually* [► 56]

- If the driver card is stolen, this must also be reported to the police. Only then can a new card be requested at the local authority upon presentation of the police notification.
 - In case of loss of the driver card, a declaration on oath must be made to be able to receive a new card. If the old card is found again, it must be handed in.
 - In case of damage or malfunction of the driver card:
Hand the card over to the relevant authority.
The replacement card must be requested within 7 calendar days.
 - A journey may be continued without driver card for a period of 15 calendar days or longer if necessary for the return of the vehicle to the company location.
 - If the authority of a foreign member state replaces the driver card: Immediately notify your relevant authority of the reason.
 - The driver card is valid for 5 years. Upon expiry of the validity of the driver card, the driver must carry the card in the vehicle for at least another 56 calendar days.
 - The card will only be withdrawn if it turns out that it was forged or another driver uses or has used the card. Or if the driver card was requested under false pretences and/or using forged documents. This means that even in case of a driving licence withdrawal or a driving ban, the card may remain with the driver.
- **Departure from legal requirements**
- In order to ensure the safety of persons, the vehicle or the transported goods, deviations from the applicable legal provisions may be necessary.
- In such cases, the driver must indicate the type and reason of the deviation with handwritten entries at the latest on arrival at a suitable stopping place. For example:

- On the tachograph chart
- On a printout from the DTCO 4.1
- In the work schedule

► **Obligations of the contractor**

The calibration and repair of the DTCO 4.1 may only be carried out by an authorised specialist workshop.

➔ *Compulsory inspection* [► 144]

- After a vehicle delivery and if not already happened:
Have an authorised specialist workshop enter the following data of the calibration into the DTCO 4.1:
 - Member state
 - Vehicle registration number
- Log in/out the company at the start/end of the vehicle use in the DTCO 4.1.
 - ➔ *Registration – inserting company card* [► 68]
- Make sure that enough authorised rolls of paper for the printer are available in the vehicle.

- Monitor the proper functioning of the tachograph, e.g. by inserting the company card.
- Observe the statutory intervals provided for checking the tachograph: Test at least every two years.
- Download the data from the data memory of the DTCO 4.1 and from the driver cards at regular intervals and store the data according to the legal stipulations.
- Supervise the proper use of the tachograph by the drivers. Check driving times and rest periods periodically and compare these with the legal requirements.

■ Intended use

The digital tachograph DTCO 4.1 is a recording device for monitoring and registering speed, kilometres travelled and driving/rest periods.

This document describes the operation of the digital tachograph DTCO 4.1.

The data processed by this tachograph supports you in your daily tasks:

- For example, they help you, the driver, to observe the social legislation relating to road transport.
- They help you, the contractor, to keep an eye on the driver and vehicle use (by means of appropriate evaluation programs).

It is stipulated for the ADR variant of the DTCO 4.1 that it can only be operated according to the specifications of ATEX Directive 2014/34/EU.

IMPORTANT

The certificate of the DTCO 4.1 expires after 15 years. After this period, the DTCO 4.1 can no longer be used.

- A notification is generated on the day of expiry
- Date of first use → *Technical data* [▶ 127]

Device description

Display and operational elements

Features

Details to the display and operating elements

Key settings (overview)

Bluetooth

Stand-by mode (display)

ADR version (Ex version)

Operating modes (overview)

Tachograph card (overview)

Saved data

Border crossing

Time zones

Pictograms (overview)

Country symbols

Automatic activities after ignition on/off (default)

Device description

■ Display and operational elements

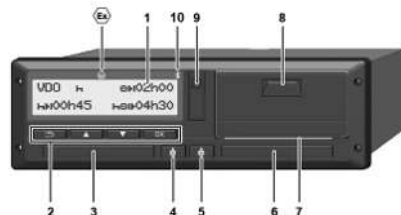


Fig. 1: Frontal view DTCO 4.1

- (1) Display
- (2) Menu buttons
- (3) Card drawer 1 with cover
- (4) Combination key driver 1
- (5) Combination key driver 2
- (6) Card drawer 2 with cover
- (7) Cutting edge printer
- (8) Printer drawer
- (9) Front interface
- (10) Bluetooth symbol

The DTCO 4.1 can be remotely controlled with optional accessories.

For this you will need:

- An external device with Bluetooth interface, e.g. smart-phone or test device.
- Suitable application software (app) on the external device. See www.fleet.vdo.com



Symbol for ADR variant (Ex variant – option)

IMPORTANT

The card shaft covers may not be removed to prevent the penetration of dust and dirt or splash water!

- Always keep the card drawers closed.

■ Features

The digital tachograph DTCO 4.1 and its system components is the vehicle unit of a tachograph or recording equipment of the second generation (smart tachograph V2) according to the requirements of Regulation (EU) No. 165/2014 as well as currently applicable Implementing Regulation (EU) 2016/799 Annex I C.

The DTCO 4.1 continuously registers driver and vehicle data.

Errors in a component, in the device, or in the operating procedure will be displayed and stored immediately after occurrence:

For the ADR variant, the DTCO 4.1 complies with ATEX Regulation 2014/34/EU and the ADR Agreement, part 9.

■ Details to the display and operating elements

► Display (1)

IMPORTANT

Except for the standby mode, the display cannot be completely switched off. It is only dimmed to a minimum value.


Contrast and brightness of the displays cannot be changed.

Dimming (after ignition off) can be modified in the workshop.

Depending on the vehicle's operational condition, different displays will appear or data can be displayed.

► Menu buttons (2)

Please use the following buttons to enter, display or print data:

 **Press the button of the desired direction several times:** Scroll through the menu level to the desired function.

Keep the button pressed: Scroll automatically.

 **Press the button briefly:** Confirm the function/selection.


 **Press the button briefly:** Return to the previous entry field, abort the country entry or exit the menu levels step by step

► Card drawer 1 (3)


Driver 1 who will drive the vehicle inserts his driver card into drawer 1.

→ *Shift start – Inserting driver card* [► 49]

► Driver 1 combination button (4)

 **Press the key for a short time:** Change activity.
→ *Setting activities* [► 54]
Keep the key pressed (at least 2 seconds): Open the card drawer.

► Driver 2 combination button (5)

 **Press the key for a short time:** Change activity.
→ *Setting activities* [► 54]
Keep the key pressed (at least 2 seconds): Open the card drawer.

► Card drawer 2 (6)

Driver 2, who is not driving the vehicle at this moment in time, inserts his driver card into drawer 2 (crew operation).

→ *Shift start – Inserting driver card* [► 49]

► Tear-off edge (7)

You can tear off the paper printout of the printer at the tear-off edge.

► Printer drawer (8)

Printer drawer for insertion of the paper roll.

→ *Replacing the printer paper* [► 119]

► Front interface (9)

Data download and parameterisation are carried out via the front interface (workshop).

The front interface is located under a cover.

The access rights in relation to the functions of this interface depend on the tachograph card inserted.

➔ *Access rights of the tachograph cards* [► 27]

■ Key settings (overview)

Important settings on the DTCO 4.1 include:

- Entering the vehicle registration number and the country of registration (if not already carried out by the workshop)
➔ *Inserting member state and vehicle registration number* [► 70]
- Activity changes when the ignition is off
➔ *Automatic activities after ignition on/off (default)* [► 37]
- Recording of speed and revolutions/min. profiles
➔ *Printing speed profiles (option)* [► 90]
- D1/D2 status detection
➔ *Shift start – Inserting driver card* [► 49]
- VDO Counter display (option)
➔ *VDO Counter (option)* [► 77]

■ Bluetooth

The DTCO 4.1 can be remotely controlled via Bluetooth.

For this you need:


- An external device with Bluetooth interface, e.g. a smartphone or a test device.
- Suitable application software (app) on the external device:
www.fleet.vdo.com.

Bluetooth activation:

➔ *Registration process* [► 64]

or


➔ *Activating / deactivating Bluetooth* [► 93]

or that Bluetooth is active, can be seen in the standard display by a “22

Entry of the registration number

Entry of the registration number and the authorising member state can also be carried out via an app:
www.fleet.vdo.com.

■ Stand-by mode (display)

In the operating mode “*operational*”, recognisable in the display by the pictogram , the DTCO 4.1 switches to Stand-by mode in the following circumstances:

- Vehicle's ignition is off.
- No message is pending.

If “*Ignition off*”, the display is dimmed.

After approx. 1 minute (customer-specific value), the display goes out completely – the DTCO 4.1 is in stand-by-mode.

A further dimming value can optionally be set (workshop).

► Exiting stand-by mode

By pressing any button, ignition on or the end of interruption the stand-by mode is exited.

The display lights up again; no further action occurs.

■ ADR version (Ex version)

The ADR variant of the DTCO 4.1 is marked with an ex symbol on the front plate.



Fig. 2: Ex symbol on the front side

The ADR variant of the DTCO 4.1 is approved for use in explosive environments.

- Ex zone: Zone II
- Ambient temperature:
-20 °C to +65 °C

3

► Special safety instructions

The following additional safety information must be observed for the ADR variant of the DTCO 4.1:

RISK OF EXPLOSION!

Observe instructions

- Please observe the instructions for the transport and handling of hazardous goods in explosive environments.

RISK OF EXPLOSION!

Please observe the following when loading and unloading hazardous goods:

- Both card drawers must be closed.
- The printer drawer must be closed.
- The cover flap of the front interface must be closed.
- Do not press any buttons on the tachograph.
- No workshop, control or company card must be inserted.

► Particularities in relation to the operation

To protect from explosion, the ADR variant of the DTCO 4.1 is reduced to internal functions while the ignition is turned off in certain hazard areas (in contrast to the standard variant).

You can use all functions of the DTCO 4.1 outside of the hazard area while the ignition is switched on.

■ Operating modes (overview)

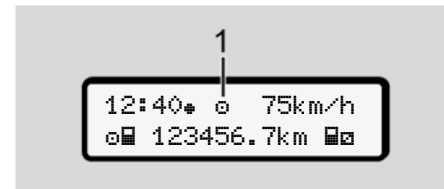






Fig. 3: Display relating to operating mode

(1) Display of the operating mode

The DTCO 4.1 has 4 operating modes which each depend on the tachograph card inserted:

- Operation  (journey/driver)
Standard display with or without driver card inserted → *Shift start – Inserting driver card* [► 49]
- Company  (contractor)
Display after inserting the company card → *Registration – inserting company card* [► 68]
- Control  (Not part in this manual)
- Calibration  (Not part in this manual)

Depending if and which tachograph cards are inserted, the DTCO 4.1 automatically switches to one of the following operating modes:

Overview of operating modes of inserted tachograph cards						
Operating modes		Card drawer 1				
		No card	Driver card	Company card	Control card	Workshop card
Card slot -2	No card	Operation	Operation	Company	Control	Calibration
	Driver card	Operation	Operation	Company	Control	Calibration
	Company card	Company	Company	Company (*)	Operation	Operation
	Control card	Control	Control	Operation	Control (*)	Operation
	Workshop card	Calibration	Calibration	Operation	Operation	Calibration (*)

(*) In this state, the DTCO 4.1 only uses the tachograph card inserted in card drawer 1.

■ Tachograph card (overview)

You will obtain the legally required tachograph cards by requesting them from the authorities of the respective EU member state.

➔ *Access rights of the tachograph cards*
▶ 27]

IMPORTANT

You can use tachograph cards of the first generation according to (EU)3821/85, Annex I B and the second generation according to Implementation Regulation(EU) 2016/799, I C, as amended.

However, only second generation work-shop cards may be used.

Possession of a tachograph card authorises the holder to use the DTCO 4.1.

Areas of activity and access rights are prescribed by law.

➔ *Access rights of the tachograph cards*
▶ 27]

IMPORTANT

In order to prevent data loss, please handle your tachograph carefully and also observe the instructions of the authorities issuing the tachograph cards.

► Driver card

You use your driver card to log yourself into the digital tachograph as a driver.

The DTCO 4.1 starts displaying and storing all activities of this driver.

You can print or download (with a driver card inserted) the data.

Thus, the driver card is used for normal driving operation (as single driver or in crew operation).

► Company card

You use the company card to log yourself into the DTCO 4.1 as the vehicle holder or owner. This enables you to access company data.

The company card is used to display, print and download the data saved in the mass memory as well as the data of a driver card - which is inserted into the other card drawer.

IMPORTANT

In addition, the company card entitles you – for the first time and if not yet carried out by a workshop – to enter the authorised member state and the vehicle registration number. If in doubt, please contact an authorised specialist workshop.

Equipped with a corresponding fleet management system, the company card also authorises you to remotely download the user data.

IMPORTANT

The company card is designed for keepers and owners of vehicles with integrated digital tachograph and must not be transferred to other persons. The company card is not designed for driving.

► Control card

(Not part of this manual)

The control card of the officer of a supervisory body (e.g. police) allows access to the mass memory.

All saved data and the data of an inserted driver card are accessible. They can be displayed, printed out or downloaded via the front interface.

► Workshop card

(Not part of this manual)

Persons of an authorised specialist workshop who are approved to programme, calibrate, activate, test, etc. will receive the workshop card.

► Access rights of the tachograph cards

The rights to access data saved in the data memory of the DTCO 4.1 are regulated by law and will be released with the corresponding tachograph card only.

		Without card	Driver card	Company card	Control card	Workshop card
Print	Driver data	X	V	V	V	V
	Vehicle data	T1	T2	T3	V	V
	Parameter	X	V	V	V	V
Display	Driver data	T1	T2	T3	V	V
	Vehicle data	V	V	V	V	V
	Parameter	X	T2	V	V	V
Read out	Driver data	X	X	T3	V	V
	Vehicle data	X	X	V	V	V
	Parameter	X	V	V	V	V

Meanings:**Driver data**

Data on the driver card

Vehicle data

Data in the data memory

Parameter data

Data for the device adjustment/calibration

V

Unlimited access rights

T1

Driver activities of the last eight days without driver identification data

T2

Driver identification only for the inserted card

T3

The associated company's driver activities

X

not possible

■ Saved data

► Driver card

The driver card generally contains:

- Data for identifying the driver.
→ *Personal ITS data* [► 10]

The following data is stored on the driver card chip after each vehicle use:

- Insertion and removal of the card
- Used vehicles
- Date and odometer reading
- Activities of the driver, during normal driving operation at least 56 days
- Kilometres travelled
- Country entries
- Status information (single or crew operation)
- Appearing events / faults
- Information concerning control activities
- Specific conditions:
 - Journeys with ferry/train status

- Journeys with OUT status (out of scope)
- Time and location of loading/unloading (cabotage)
- Time and location of the border crossing (Posted Workers Directive)

When the internal memory is full, the DTCO 4.1 overwrites the older data.

→ *Driver card: Obligations of the driver* [► 16]

► Company card

The company card generally contains:

- Data for identifying the company and authorising access to stored data.

After each use, the following data is stored on the company card:

- Type of activity
 - Log in/log out
 - Downloading the data from the data memory
 - Downloading the data from the driver card
- Time period (from / to) from which the data was downloaded
- Vehicle ID
- Identity of the driver card from which the data was downloaded

When the chip memory is full, the DTCO 4.1 overwrites the older data.

→ *Obligations of the contractor* [► 17]

► Mass memory (in the device)

- Over a period of at least 365 calendar days, the mass memory collects and stores the data according to Implementation Regulation (EU) 2016/799 Annex I C, as amended.
- The evaluation of activities occurs in 1 calendar minute intervals and the DTCO 4.1 will evaluate the longest continuous activity for each interval.
- The DTCO 4.1 can store approx. 168 hours of speed values in the resolution of one second. Each second of the values is thus saved exactly with date and time.
- Saved speed values with a high resolution (one minute before and one minute after an unusual deceleration) support the analysis in the event of an accident.

This data can be read via the front interface (only with company card):

- Downloading the driver card data.

- Downloading the mass memory with a download key (option).

■ Border crossing

The DTCO 4.1 automatically recognises a border crossing.

This applies for all countries of the NUTS0 map: <https://ec.europa.eu/eurostat/documents/345175/7451602/2021-NUTS-0-map.pdf>.

The Spanish regions are also automatically detected.

For other countries, the country must be entered manually at the start of the shift
 ➔ *Indicating the country at start of shift*
 [53].

■ Time zones

The DTCO 4.1 factory time setting is UTC time.

Time entries are stored by the DTCO 4.1 in UTC time.

The UTC time corresponds to time zone 0 on earth's 24 time zones (–12...0...+12h).

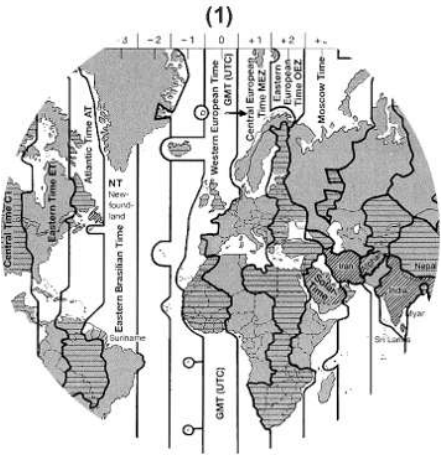


Fig. 4: Time zones in Europe

(1) Time zone 0 = UTC

Time zone difference	Country
00:00 (UTC)	UK / P / IE / IS
+ 01:00 h	A / B / BIH / CZ / D / DK / E / F / H / HR / I / L / M / N / NL / PL / S / SK / SLO / SRB
+ 02:00 h	BG / CY / EST / FIN / GR / LT / LV / RO / UA
+ 03:00 h	RUS / TR

Converting to UTC time

UTC time = Local time – (ZD + SO)
ZD = time zone difference
SO = summer time (only during summer time)
(ZD + SO) = time difference to be set

Example:






Local time in Germany = 15:30 (day-light-savings time)






UTC time = Local time – (ZD + SO)
= 3:30 p.m. – (01:00 h + 01:00 h)




UTC time = 1:30 p.m.




In this menu, you can set the local time:
➔ *Set Local time* [96]











■ Pictograms (overview)











Operating modes	
	Company
	Control
	Operation
	Calibration
	Production status






Persons	
	Company
	Controller
	Driver
	Workshop / inspection centre
	Manufacturer

Activities	
	Standby time
	Driving time
	Break and rest time

Activities	
	Other working time
	Valid interruption / break
	Unknown

Devices / functions	
1	Card drawer 1; driver 1
2	Card drawer 2; driver 2
	Tachograph card (read correctly)
	Tachograph card inserted, relevant data read
	Clock
	Printer / printout
	Entry
	Display
	Licence code
	External storage; downloading data (copying)
	Data transmission running
	Sensor

Devices / functions	
	Vehicle / vehicle unit / DTCO 4.1
	Tyre size
	Low voltage
	Overvoltage
	Voltage interruption
	Remote control
	GNSS
	DSRC
	ITS
	Total weight of vehicle group, trailer included

Miscellaneous	
	Event
	Fault
	Operational note / Working time warnings
	Shift start
	Location

Miscellaneous	
	Safety
	Speed
	Time
	Total / summary
	End of shift
	Manual entry of activities
	Border crossing
	Graph
	Difference
	User entry
	Please wait
	Information
	Remote HMI
	Bluetooth

Specific conditions	
OUT	Recording equipment not required

Specific conditions	
	Vehicle located on a ferry or on a train
	Load: Passengers
	Load: Goods
	Load: unspecified
	Load
	Unload
	Load/unload

Qualifiers	
24h	Daily
I	Weekly
II	Two weeks
+	From or to





Pictogram combinations

Miscellaneous	
	Control location
	Start time






Miscellaneous	
	End time
OUT+	Start "Out of scope": Recording equipment not required
+OUT	End "Out of scope:"
	Start "ferry / train".
	End "ferry / train"
	Position after 3 h accumulated driving time
	Position "load"
	Position "unload"
	"Load" / "unload" with GNSS position
	Position border crossing
	Location at start of working day (shift start)
	Location at end of working day (shift end)
	From vehicle
	Printout driver card
	Printout vehicle / DTCO 4.1
	Entry vehicle / DTCO 4.1

3



Miscellaneous

	Display driver card
	Display vehicle / DTCO 4.1
	Local time
	Local time company















Cards

	Driver card
	Company card
	Control card
	Workshop card
	No card inserted











Driving

	Crew operation
	Total driving time of double weeks


Printouts

24h 	Daily driver activities (daily value) from the driver card
! 	Events and faults from the driver card
24h 	Daily driver activities (daily value) from DTCO 4.1
! 	Events and faults from DTCO 4.1
>> 	Speeding events
T 	Technical data
	Driver activities
iR 	Periods with activated remote control
	v-diagram
	Status D1/D2 diagram (option)
%v 	Speed profiles (option)
%n 	Rpm profiles (option)
i 	Sensor information
i 	Safety information

Displaying

24h 	Daily driver activities (daily value) from the driver card
! 	Events and faults from the driver card
24h 	Daily driver activities (daily value) from vehicle / DTCO 4.1
! 	Events and faults from the vehicle/ DTCO 4.1
>> 	Speeding events
T 	Technical data
	Cards
	Company
	Last measured total weight of vehicle group, trailer included
max 	Permitted total weight of vehicle group, trailer included

Events

! 	Insertion of an invalid tachograph card
--	---

Events	
!∞	Time overlap
!∞	Insertion of driver card while driving
>>	Speeding
!∞	Motion data error
!∞	Time adjustment (by work-shop)
!∞	Card conflict
!∞	Driving without valid driver card
!∞	Last card process not completed correctly
!÷	Interruption of the power supply
!∞	Security breach
!∞	Missing GNSS signal
!∞?	GNSS irregularities
!∞	Time conflict
!∞	Communication error DSRC
>∞	Speeding control
!∞	Vehicle motion conflict

Faults	
×∞	Card fault
×∞	Printer fault
×∞	Internal fault DTCO 4.1
×∞	Download fault
×∞	Sensor fault
×∞	Internal GNSS fault
×∞	Internal DSRC fault






Driving time warnings	
∞	Break!

Manual entry process	
∞/×/∞	Entry of "activities"
?	Entry of "unknown activity"
∞?	Entering <i>location</i> at the end of the shift
∞?	Entering <i>location</i> at the start of the shift

Operational notes	
∞	Wrong entry
∞	Menu access not possible
∞	Please enter
∞	Printout not possible
∞	No paper
∞	Printout delayed
∞	Faulty card
∞	Eject the card
∞	Incorrect card
∞	Ejection not possible
∞	Process delayed
∞?	Recording inconsistent
∞	Internal fault
∞	Invalid in days ...
∞	Calibration in days ...
∞	Downloading data from the driver card in days ...

3

VDO Counter (option)

	Remaining driving time
	Start of the next driving time
	Future driving time
	Remaining break time / rest time
	Remaining time to start, daily, weekly rest time

■ Country symbols**Country abbreviations**

A	Austria
AL	Albania
AND	Andorra
AR	Armenia
AZ	Azerbaijan
B	Belgium
BG	Bulgaria
BIH	Bosnia and Herzegovina
BY	Belarus
CH	Switzerland
CY	Cyprus
CZ	Czech Republic
D	Germany
DK	Denmark
E	Spain *
EC	European Community
EST	Estonia
EUR	Rest of Europe

Country abbreviations

F	France
FIN	Finland
FL	Liechtenstein
FR/FO	Faroes
GE	Georgia
GR	Greece
H	Hungary
HR	Croatia
I	Italy
IRL	Ireland
IS	Iceland
KZ	Kazakhstan
L	Luxembourg
LT	Lithuania
LV	Latvia
M	Malta
MC	Monaco
MD	Republic of Moldavia
MK	Macedonia
MNE	Montenegro

Country abbreviations	
N	Norway
NL	The Netherlands
P	Portugal
PL	Poland
RO	Romania
RSM	San Marino
RUS	The Russian Federation
S	Sweden
SK	Slovakia
SLO	Slovenia
SRB	Serbia
TJ	Tajikistan
TM	Turkmenistan
TR	Turkey
UA	Ukraine
UK	United Kingdom, Alderney, Guernsey, Jersey, Isle of Man, Gibraltar
UZ	Uzbekistan
V	Vatican City

Country abbreviations	
WLD	Rest of the world

* Spanish regions: → *Spanish regions*
[37]

► Spanish regions

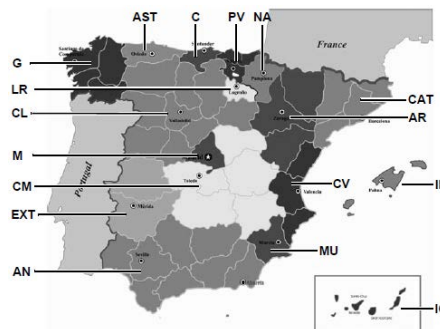


Fig. 5: Regions in Spain

Identifications of the Spanish regions	
AN	Andalusia
AR	Aragon
AST	Asturias
C	Cantabria

Identifications of the Spanish regions	
CAT	Catalonia
CL	Castile-León
CM	Castile-La Mancha
CV	Valencia
EXT	Extremadura
G	Galicia
IB	Balearic islands
IC	Canary Islands
LR	La Rioja
M	Madrid
MU	Murcia
NA	Navarra
PV	Basque Community

■ Automatic activities after ignition on/off (default)

Automatically set activity:

After ignition on

Driver 1 and driver 2

⏸	Break time / rest time
⌘	Other working time
⏻	Standby time
?	No change

After ignition off

Driver 1 and driver 2

⏸	Break time / rest period
⌘	Other working time
⏻	Standby time
?	No change

IMPORTANT

The vehicle manufacturer may have already programmed defined settings of the activity after *ignition on/off*.

- Mark the set functions in the table by (✓).

IMPORTANT

An exception is the addition of activities on the driver card. This option is disable during *Manual input*. There is no change of activity after *ignition on/off*.

The automatic setting after “*ignition on/off*” is visible in the standard display. The activity flashes for approx. 5 seconds and subsequently, the previous display reappears.

➔ *Displays* [▶ 40]

Standard settings:

➔ *Setting activities* [▶ 54]

Operation (general)

Displays

Navigating within menus

Inserting card

Removing the card

Handling of the cards

Downloading data

Operation (general)

■ Displays

► Display after ignition on

If no tachograph card is inserted into card drawer 1, for 20 seconds, note (1) (card missing) is displayed, afterwards display (2).

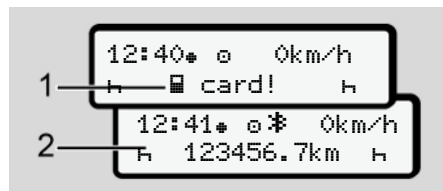


Fig. 6: Display after ignition on

IMPORTANT

Explanation of the pictograms → *Displays during journey* [p. 40]

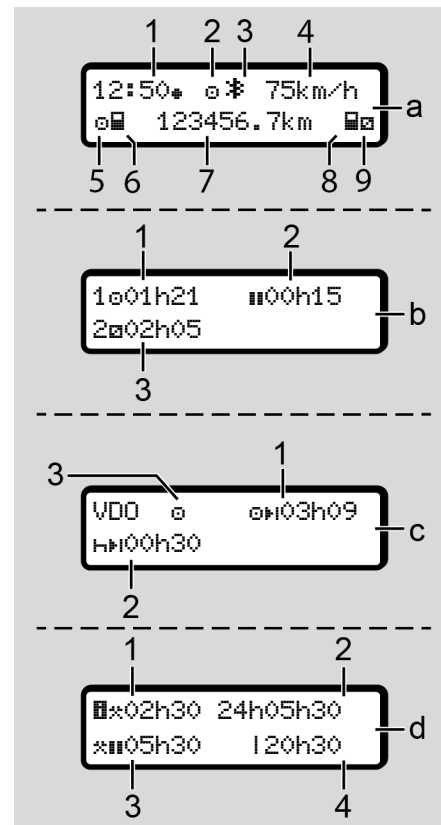
► Displays during journey

While driving, the displays (a), (b) or (c) (option) can appear.



Complete listing of the pictograms → *Pictograms (overview)* [p. 31].

By pressing a menu button / you can change the display.




Displays during journey:



Standard display (a):

- (1) Time
with symbol  = local time
without symbol  = UTC time
- (2) "Operating mode symbol "Operational"
- (3) Symbol that Bluetooth is active
- (4) Speed
- (5) Activity driver 1
- (6) Card symbol driver 1
- (7) Odometer total
- (8) Card symbol driver 2
- (9) Activity driver 2






Display driving and rest times (b):

- (1) Driving time  driver 1 since a valid rest time
- (2) Valid rest time  in break intervals of at least 15 minutes and subsequent 30 minutes
- (3) Times of driver 2:
Current activity availability time  and duration of activity.



IMPORTANT

If no driver card is inserted, times are displayed that are assigned to the respective card drawer 1 or 2.

Display remaining driving and rest times (option VDO Counter) (c):

- (1) Remaining driving time  
( flashing = this part of the display is currently active).
- (2) Next valid rest time/ daily or weekly rest time .
→ VDO Counter (option) [ 77]
- (3) The current activity is shown.

Working time counter display (option VDO counter) (d):

- (1) Uninterrupted working time (period of the currently set working time  without rest time).
- (2) Daily working time (total working time since the last daily or weekly rest time).
- (3) Accumulated rest time (total break time during the current working time .
- (4) Current weekly working time (total currently set working time for the current calendar week up to the present time

► Messages

Messages are displayed independently of the current activity.

The following causes result in a message being displayed:

!	Event
×	Malfunction
⏸	Driving time warning
📄	Operating note

➔ *Meaning of messages* [▶ 102]

► Display after ignition off

After “ignition off”, the following is displayed:

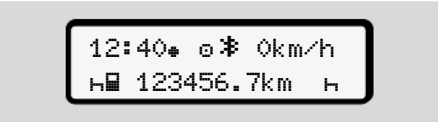


Fig. 7: Display after ignition off

■ Navigating within menus

- Select the desired function, activity or numeric value with the keys **↶** **↷** in the entry field.
- Confirm your selection with the button **OK**.

► Menus while vehicle is stationary

When the vehicle is not moving and driver card is inserted, you can call up other data of the driver card.

➔ *Second menu level – menu functions* [▶ 82]

■ Inserting card

⚠ ATTENTION

Ensuring road safety

- As a driver, only insert the card while the vehicle is stationary.
- Inserting the card while the vehicle is moving is possible but not permitted. This is saved as an event.

Always keep the card drawers closed.

The card drawer covers must not be removed to prevent dust and dirt or spray water getting into the card drawer.

IMPORTANT**Selection of the card drawer**

- Card drawer 1 (left card drawer) for the card of the person driving the vehicle.
- For crew operation: Card drawer 2 (right drawer) for the card of the accompanying driver.
- For the company card: Freely selectable card drawer.

IMPORTANT

For operating the ADR variant, the ignition must be switched on.

Please observe the special safety notes for the operation of the ADR variant of the DTCO 4.1 in explosive environments.

➔ *ADR version (Ex version)* [► 23]

1. Keep the combination button driver 1 or driver 2 pressed for more than 2 seconds.



Fig. 8: Request card (combination button)

2. The card drawer comes out. Carefully fold down the card drawer cover.



Fig. 9: Fold down the cover

3. Insert your card – chip up and arrow facing forward – into the card drawer.



Fig. 10: Inserting card

4. Carefully fold up the card drawer cover.
5. Push the card drawer into the card drawer until it engages. The information on the chip is read. While a card is being read in card drawer 1, another card can be inserted into card drawer 2:
 - Crew operation: the driver card of the second, accompanying driver.
 - Reading the card and mass memory data: the company card.

Depending on the card inserted, menu-driven operation steps are carried out.

- For the first and (if inserted) second driver card
→ *Shift start – Inserting driver card* [▶ 49]
- For the company card
→ *Registration – inserting company card* [▶ 68]

IMPORTANT

If the DTCO 4.1 detects an invalid card during reading, the read-in procedure will terminate. (111 insertion aborted).

► Language

The language displayed depends on:

- Card inserted into card drawer 1.
- The tachograph card with a higher value, such as the company card or control card.

As an alternative to the automatic language setting, you can set the desired language.

→ *Setting the language* [▶ 76]

■ Removing the card**IMPORTANT**

You must only remove the cards when the vehicle is stationary.

! ATTENTION**Protection from misuse**

Remove the driver card from the card drawer:

- At the end of the shift
- When changing drivers or vehicles

IMPORTANT



For operating the ADR variant, the ignition must be switched on.

Please observe the special safety notes for the operation of the ADR variant of the DTCO 4.1 in explosive environments.

→ *ADR version (Ex version)* [▶ 23]



Fig. 11: Request card (combination button)

1. Keep the combination button Driver 1 or Driver 2 pressed for more than 2 seconds.
Subsequently, the display will show:
 - The name of the card owner.
 - A progress bar for the transmission of data onto the card chip
 - The logoff request
2. Use the buttons  /  to select the desired function:
 - Driver card:
Selection of the country you are currently in.


IMPORTANT

If the country is not entered within a minute, the card ejection is terminated.

- Company card:
 - **Yes** if you wish to log off the company on the DTCO 4.1.
 - **No** if the company lock should stay activated.

IMPORTANT

If the company lock is deactivated, the saved data of your company will still be locked for an external company.

3. Please confirm your selection using the button .

IMPORTANT

A note is displayed for the following cases:

- Periodic verification of the DTCO 4.1
- Validity of the company or driver card expires
- Download of data on the driver card is due

IMPORTANT

If an inserted card is currently being processed (for reading or ejection) and the ejection of a card in the other card drawer is requested then the DTCO 4.1 first completes the current process of the first card before the ejection process for the second card is started.

The card feed of the corresponding drawer comes out

4. Remove the card.
5. Carefully fold up the card drawer cover.
6. Push the card drawer into the card drawer until it engages.

■ Handling of the cards

- Do not bend or fold the tachograph card and do not use them for anything other than their intended purpose.
- Do not use damaged tachograph cards.
- Keep all contact surfaces clean, dry, and free of grease and oil (always use a protective cover).
- Protect the card from direct sunlight (do not leave it lying on the instrument panel).
- Do not place it in direct proximity to strong electromagnetic fields.
- Do not use the card beyond its period of validity. Apply for a new tachograph card in a timely manner before expiry.

■ Downloading data

► From driver or company card

RISK OF EXPLOSION!

Explosion risk due to residual voltage and open interfaces for the ADR variant

Operating the buttons of the DTCO 4.1, inserting cards, opening the printer drawer or opening the front interface, poses an increased explosion risk in explosive areas.

- The cover must be closed.
- No data may be downloaded.

IMPORTANT

Only 1 driver card (card of driver-1 or driver-2) may be inserted for downloading.

If both cards are inserted, no data transmission will occur.

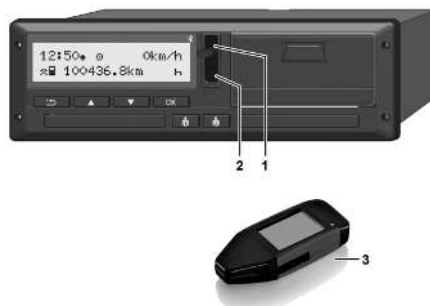


Fig. 12: Connecting to the front interface

1. Fold up the cover flap (1) of the front interface.
2. Insert the download key (3) into the front interface (2).
The download starts automatically.

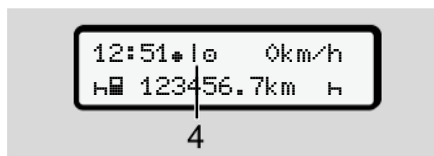


Fig. 13: Pictogram: Data transfer

During the data transfer, the corresponding pictogram (4) is displayed.

IMPORTANT

Possible loss of data during the transfer onto the download key.

Do not interrupt the connection to the front interface during the data transfer.

3. Please close the cover flap (1) after downloading the data.

► Data identification

The copied data is assigned a digital signature (identification).

This signature allows to assign the data to a specific driver card and to check its completeness and authenticity.

IMPORTANT

Detailed information about the readout software or the download key is included in the corresponding documentation.

► Downloading from the mass memory

Data can only be downloaded from the mass memory with the company card.

You can set on the download key which data (card or mass memory) is to be downloaded.

► Remote-controlled download (option)

A fleet management system (remote operation) also enables a remote-controlled download of the data after successful authentication of a company card.

IMPORTANT

Detailed information about the hardware and software components required for this as well as their usage is included in the corresponding documentation.

Operation by the driver

Driver card functions

Shift start – Inserting driver card

Setting activities

Load/unload (cabotage)

Shift end – removing driver card

Manual entries (entry/addition)

Driver / vehicle change

Inserting driver card for the first time

Operation by the driver

■ Driver card functions

The driver card is used by the driver to identify himself on the DTCO 4.1.

The driver card is used for normal driving operation and allows storing, displaying, printing or downloading (with the driver card inserted) of activities.

IMPORTANT

The driver card is not transferable.

IMPORTANT

Menus for the display and the printout of driver data are only available if a corresponding card is inserted.

For example, the menu point **Printout driver 2** is only displayed if a driver card is inserted into card drawer 2.

■ Shift start – Inserting driver card

IMPORTANT

“Operation by driver” corresponds to operating mode “Operational” according to Implementation Regulation (EU) 2016/799 I C, as amended.

→ *Operating modes (overview)* [▶ 24]

IMPORTANT

For operating the ADR variant, the ignition must be switched on.

Please observe the special safety notes for the operation of the ADR variant of the DTCO 4.1 in explosive environments.

→ *ADR version (Ex version)* [▶ 23]

▶ 1. Inserting card

Insert your driver card into the card slot at the start of the shift (start of working day).

→ *Inserting card* [▶ 42]

- Inserting the driver card switches the display to the language stored on the driver card.

IMPORTANT

You can set the language in the menu.

→ *Setting the language* [▶ 76]

The menu displayed guides you step by step to the complete operational readiness of the DTCO 4.1:




Fig. 14: Welcome display

The name of the cardholder, the set local time (e.g. **16:00***) and the UTC time (e.g. **14:00UTC**) will appear for approximately 3 seconds (time offset = 2 hours in summer time).

Entries are not possible while the card is being read.


5

When a button is pressed, a message is displayed:



please wait!

Or rather:



ejection not possible xx

The card information is being read:



b. 10 Maier
----- o

Fig. 15: Reading the card information


The left side displays the number of the card drawer into which the card is inserted.

Next to it appears the name of the driver (read by the driver card).

A progress bar displays the continued of the driver card.

IMPORTANT

As long as the manual entry of driver activities is possible, but not yet started, the DTCO 4.1 offers the driver the possibility to eject this driver card without further storing of data records on the card and DTCO 4.1.



c. last withdrawal
15.03.23 16:31*

Fig. 16: Display of the last removal

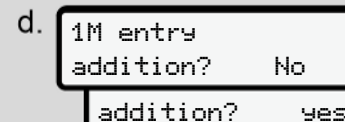
For approx. 4 seconds, date and time of the last card removal are displayed in local time (symbol *).

IMPORTANT

Pay attention to the completeness of the driver data.

According to the Regulation, any activities which cannot be recorded on the driver card must be entered manually.

Next follows the request for manual addition:



d. 1M entry addition? No
addition? yes

Fig. 17: Addition as option

- You can add activities;
➔ **Manual entries (entry/addition)**
▶ 58]
 - If you do not want to add “any activities”, select **No**; to continue, see step i.
 - By selecting **Yes** you request DTCO 4.1 to make manual inputs; subsequent display:

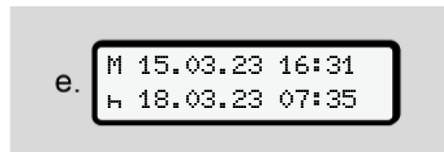


Fig. 18: Entry options

M = Manual entry

h = Entry field of the activity is flashing

The period between removal (1st line) and current insertion-withdrawal operation (2nd line) in local time appears.

→ *Setting activities* [p. 54]

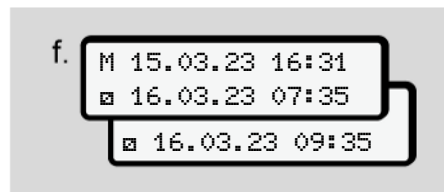


Fig. 19: 2nd row = entry block

- You can enter the required information (flashing entry fields) in the following order: *Activity / Day / Month / Year / Hour / Minute*.

The process ends when the time of the insertion-withdrawal operation is reached.

IMPORTANT

The DTCO 4.1 rejects the withdrawal of driver card until the reading procedure is finished. You have to request the withdrawal again to withdraw the driver card after the DTCO 4.1 has finished the reading procedure.

Next, the prompt for entering the country appears.



Fig. 20: Selecting the country

- Select the country and region, if necessary applicable, for which the addition is for and confirm your selection with **OK**.

→ *Country symbols* [p. 36]

IMPORTANT

For Spain, you must also state the region.

IMPORTANT

You can press the button **ESC** to terminate the entry if you would like to continue your shift immediately.

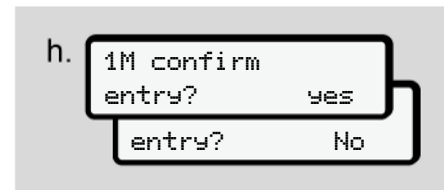


Fig. 21: Confirming the entry

- Please confirm your entry with **Yes** or **No**.

5

IMPORTANT

When selecting **No**, the entries are displayed again and you can correct them, if necessary.

- First insertion
The first time the driver card is inserted, additional prompts are displayed:
→ *Inserting driver card for the first time* [► 64]

The standard display follows.

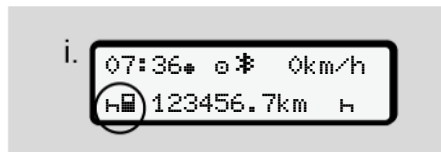


Fig. 22: Standard display with inserted card

The symbols displayed have the following meaning:

- = The driver card is in the card drawer.
- = You can start the journey, the data is read.




Fig. 23: Ready for driving

The DTCO 4.1 indicates that the journey can start, also whether it is a single driver (■) or a crew operation (■).

IMPORTANT

If the readiness to drive is not displayed, check whether a valid driver card has been inserted in drawer 1 and drawer 2, all necessary information has been carried out and there is no card conflict.

IMPORTANT

If two driver cards are inserted, the DTCO 4.1 requests the entries for the second driver card as soon as the first driver card has been read and readiness to drive has been displayed.

IMPORTANT

The symbol ■ is displayed for both card drawers.

If the cards are inserted for driver 1 and driver 2, the journey can commence as soon as the symbol ■ is displayed for driver 1.

► 2. Setting activity

Use the combination button of the corresponding card drawer ■ to set the activity you would like to perform.

→ *Setting activities* [► 54]

- When changing the local time: Adjust the time to the current local time.
→ *Set Local time* [► 96]

The DTCO 4.1 is ready.

IMPORTANT

The start of the journey ends any started manual entry – also for driver 2.

! ATTENTION

It is essential that you set the activity to **H** during a break or rest time.

Faults on the DTCO 4.1 or the system components are shown in the display → *Meaning of messages* [p. 102].

- Confirm the message with the button **OK**.

► Country entry – manual

A border crossing is automatically detected by the DTCO 4.1 → *Border crossing* [p. 30].

If the DTCO 4.1 does not automatically detect the border crossing, the country change must be performed manually:

Indicating the country at start of shift



Fig. 24: Entry option - start country

- Select symbol **•H?** Select **start country** and confirm.
- Select and acknowledge the country. → *Country symbols* [p. 36]

IMPORTANT

In Spain, you must also indicate the region in which your journey commences. → *Spanish regions* [p. 37]

Indicating country at shift end

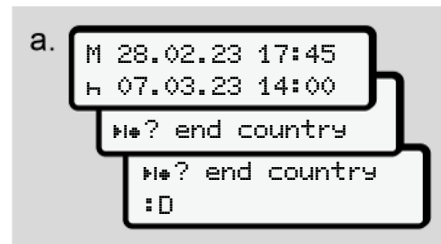


Fig. 25: Entry - End country

- In the first entry field **H**, select symbol **•H?** Select **End country** and confirm.
- Select and acknowledge the country.

Selecting the countries

In case of repeated selection, the previously entered country is displayed first.

By pressing the buttons **◀/▶** the four previously entered countries are displayed.

Symbol: Colon in front of the country symbol **:B**.

5

IMPORTANT

This is also available for the region selection - e.g Spain.

The subsequent selection occurs in alphabetical order, starting with letter **A**:

- Button **■**: **A, Z, Y, X, ...** and more
- Button **■**: **A, B, C, D, ...** and more

IMPORTANT

If vehicle recording is activated, the DTCO 4.1 offers a pre-selection of countries based on the location of the vehicle at the time the driver card was inserted.

If a country cannot be determined by the vehicle recording (vehicle is outside the available card data or the position calculation is still running), the DTCO 4.1 offers the last four specified countries or regions.

IMPORTANT


By pressing and holding of button **■/■** you can accelerate the selection (auto repeat function).

IMPORTANT

The suggested locations are suggestions to make the selection easier. As the driver, ensure that you select the country you are actually in.

► Aborting the entry procedure

If no entry occurs within 30 seconds, the following display is shown:



4.1 please
enter

Fig. 26: Entry request on the display

If within a further 30 seconds the button **OK** is pressed, you can continue the entry.

The driver card is ejected when no entry is made and no button is pushed on the DTCO 4.1 within 10 minutes.





Data already entered but not yet confirmed is discarded to ensure that only correct data and data confirmed by you is stored. This affects the remote entry and the direct entry in the DTCO 4.1.

Requesting the card by pressing the combination button **■** interrupts the "manual entry". This is also cancelled if the journey is started during the entry.

■ Setting activities

► Possible activities


The following activities can be set:

	Driving time (automatic when driving)
	All other working times
	Availability (waiting times, co-driver time, driver 2 sleeper-cab time during the journey)
	Breaks and rest times

► Changing activities

IMPORTANT

Setting the activities is only possible when the vehicle is stationary.

- Press the combination button  for driver 1.
The standard display is shown.

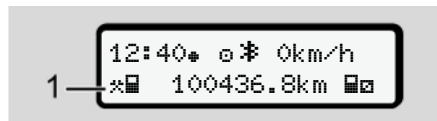








Fig. 27: Standard display with activity (1)

- Press the combination button  until the required activity appears in the display **(1)**.
- In crew operation: As co-driver (driver 2), press button .

► Automatic setting

The DTCO 4.1 switches automatically to the following activities:

for ...	Driver -1	Driver -2
Journey		
Vehicle stop		

IMPORTANT

Ensure the correct calculation of the VDO Counter (option):

- It is essential that you set activity **H** at the end of a shift or break.

Automatic setting after ignition on/off (default)

After ignition on/off, the DTCO 4.1 can switch to a defined activity; for example **H**.

This activity can be programmed with a company card or by an authorised specialist workshop.

The activity **(1)** and/or **(2)**, which automatically changes due to ignition on or ignition off, is shown in the standard display. It flashes for around 5 seconds.

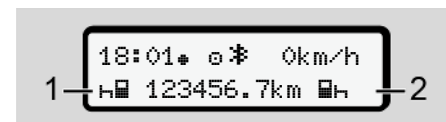


Fig. 28: Flashing of the activity in the standard display

After ignition on, the previous display reappears.

5

Example:

You have selected the “Counter” and are switching the ignition off.
When switching on the ignition, the “Counter” is displayed again “after 5 seconds.

► Recording activities manually**IMPORTANT**

Observe Regulation.

According to Regulation (EU) 165/2014, activities which cannot be recorded on the driver card must be added manually.

In the following cases, activities must be entered in writing:

- In case of a defect in the DTCO 4.1
- In case of loss, theft, damage or malfunction of the driver card.

In these cases, you must create a daily printout on the DTCO 4.1 at the start and at the end of the journey or the shift.

On the back of the printout, you can add your activities manually **(2)** and complete the printout with personal details **(1)**.

Fig. 29: Entering the activities

Meaning of symbols

⊗	First and last name
⊗	Number of the driver card or the driving licence
A No.	Vehicle registration number
•+	Location at the start of the shift
+•	Location at the end of the shift
+km	Odometer reading at the end of the shift
km+	Odometer reading at the start of the shift
km	Kilometres travelled

IMPORTANT

Please observe the legal requirements applicable in your country.

■ Load/unload (cabotage)

You can document loading/unloading processes within the cabotage regulation (cross-border transport) in the DTCO 4.1.

The DTCO 4.1 stores the location and time of a loading/unloading process.

Entry menu: → *Menu point entry vehicle* [► 94]

■ Shift end – removing driver card

IMPORTANT

To protect personal data, you should remove your driver card at the end of each shift.

You can only remove the driver card when the vehicle is stationary.

IMPORTANT

To operate the ADR version, the ignition must be switched on.

Please observe the special safety notes for the operation of the ADR version in explosive environments.

→ *ADR version (Ex version)* [► 23]

1. At the end of your shift (end of your working day) or when changing vehicles, set the corresponding activity, e.g. rest time **H**.
→ *Setting activities* [► 54]
2. Press the button **⏻** for at least 2 seconds.



Fig. 30: Details to the current location

3. Choose the country with the buttons **⏻** / **⏻** and confirm the selection with button **OK**.
→ *Indicating the country at start of shift* [► 53]

IMPORTANT

As soon as the function is available, the DTCO 4.1 offers the possibility to generate a daily printout before the card is ejected.

IMPORTANT

If the country is not entered within a minute, the card ejection is terminated.

5

4. The number of the card drawer and the driver's surname are displayed. A status bar shows the writing process of the driver card.
5. Remove your driver card from the card drawer.
 → *Removing the card* [► 44]
 This also applies for driver changeovers in crew operation. Next, insert your driver card into the other drawer.
 The display shows:

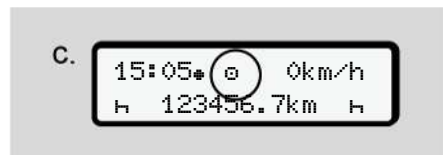


Fig. 31: Standard display without cards

6. If required, use the print menu to print out the saved activities and events.
 → *Second menu level – menu functions* [► 82]

IMPORTANT

If you would like a printout of the past 24 hours, please wait – if possible – until the following day.

This way, you ensure that the last activity is also fully included in the printout.

■ Manual entries (entry/addition)

When, after inserting the driver card during the prompt **entry addition?**, you have confirmed with **Yes** (step d), the manually changeable entries are displayed (step e).

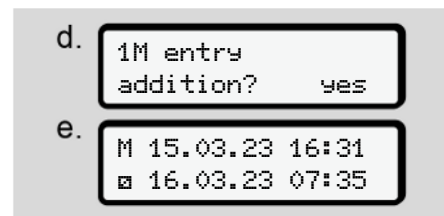


Fig. 32: Displays of correction options

You can only make the entries one after the other (buttons **▲**/ **▼** and **OK**).

If you made an incorrect entry, you can go back using the button **↶** and repeat the entry.

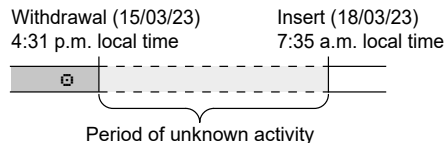


Fig. 33: Example for a period with unknown activity

The following entries are possible:

- Activity rest time **H** add:
→ *Adding activity rest time* [▶ 60]
- Continue work time:
→ *Continuing activities* [▶ 61]
- Continue working time, end working time and/or precede a working time with activities:
→ *Continuing activities and preceding others with activities* [▶ 62]

These options after inserting your driver card also generally apply for selecting the current activity.

► Card requests during the manual entry

1. Use the button **☐** to request the card for ejection.
The prompt for manual entry is displayed:


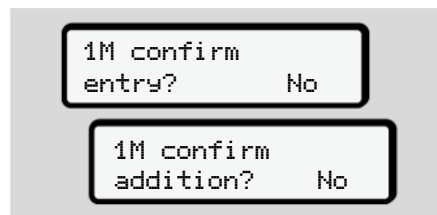


Fig. 34: Addition as option

2. Use the buttons **▲/▼** to select **No** and confirm with button **OK**.
3. Continue with step 3.
→ *Shift end – removing driver card* [▶ 57]


The manual entry is aborted. The DTCO 4.1 stores the activity **?** for the unknown period. .

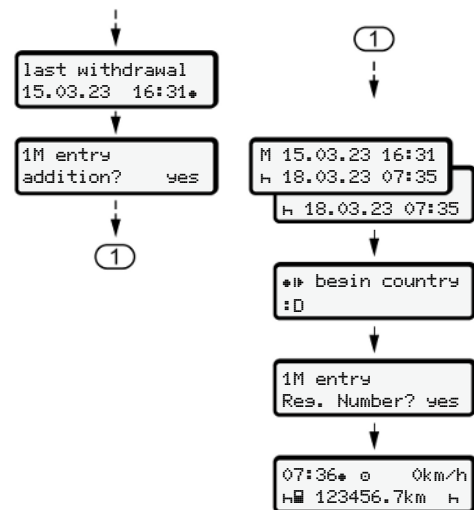► Adding activity rest time



Withdrawal (15/03/23)
4:31 p.m. local time


Insert (18/03/23)
7:35 a.m. local time





Observe: Entry takes place in local time.



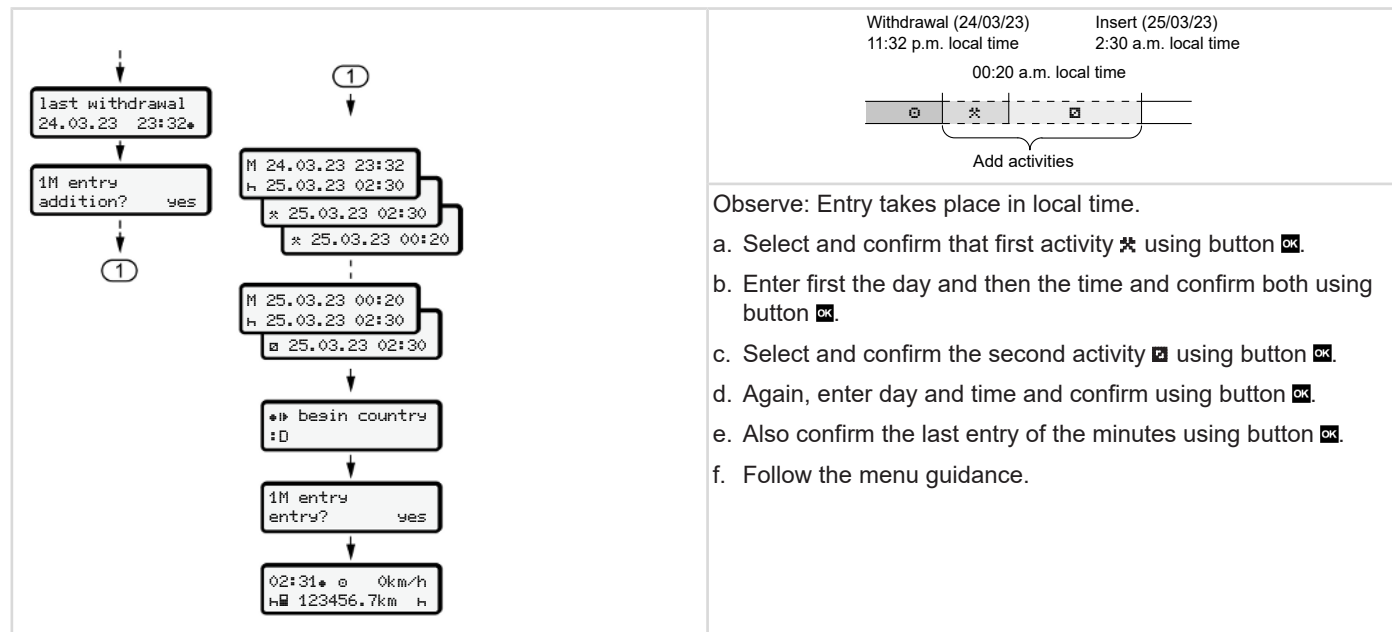
- After selecting **Yes** for an addition:
- Select and confirm the activity **H** using button **OK**.
The display moves to the next flashing entry field. If you keep the button **OK** pressed, the display moves to the last entry of the display.
- Also confirm the last entry of the minutes using button **OK**.
- Follow the menu guidance.

► Continuing activities

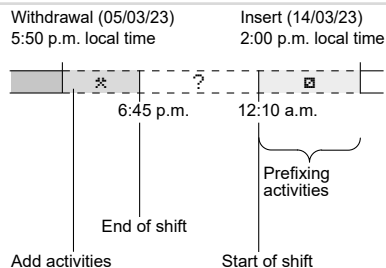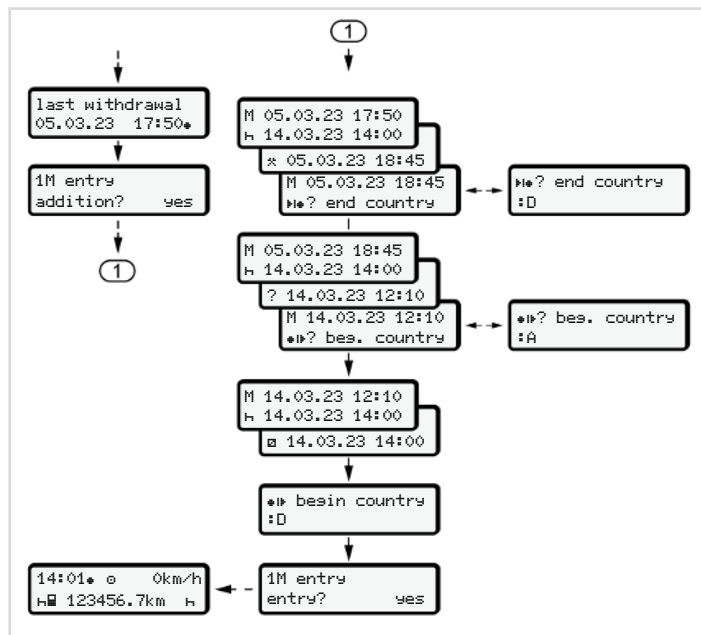



Please note: The entry is in local time.

- Select and confirm the first activity  with date and time.
- Select and confirm the symbol  **End country.**
- Select and confirm the country.
- Select and confirm the following activity
 = unknown activity with date and time.
- Repeat steps 2 to 4 until the time of the insertion process has been reached.

■ Driver / vehicle change



Fig. 35: Changing driver card

► Case 1 – Crew operation

Driver 2 becomes driver 1.

- Removing driver cards from the card drawers and insert into the other card drawer.
- Setting required activity:
→ *Setting activities* [▶ 54]

IMPORTANT

During crew operation, the card of driver 1 can be inserted first in order to be able to start the journey quickly. While the card of driver 1 is read, the card of driver 2 can be inserted.

The journey can be started as soon as the symbol ■ for driver 1 and the symbol ■ for driver 2 is displayed.

► Case 2 – Shift end

Driver 1 and/ or driver 2 leave the vehicle.

- The person in question creates a daily printout, if necessary, requests his driver card and removes the driver from the card drawer.
- The new vehicle crew inserts the driver card, depending on the function (driver 1 or driver 2) into the card drawer.

► Case 3 – Mixed operation

Vehicle usage with different tachograph types.

- For example, analogue tachographs or ...
- digital tachograph with driver card according to Regulation (EU) 165/2014, for example DTCO 4.1.

During an inspection, the driver must be able to present the following items for the current week and for the last 28 days:

- Driver card **(1)**,
- relevant daily printouts from the digital tachograph **(2)**, for example in the event of damage or malfunction of the driver card,
- filled in charts **(3)**,
- manual records of the activities.

5

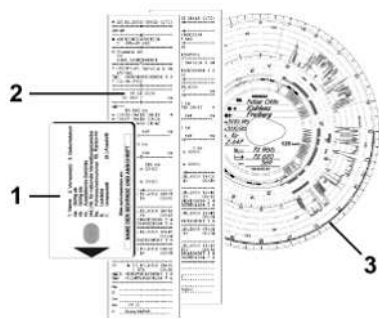


Fig. 36: Examples of documents to be carried

IMPORTANT

Please observe the legal requirements applicable in your country.

■ Inserting driver card for the first time

► Data usage

When you insert your driver card for the first time, you will be asked about the protection of your personal data and whether you agree to the processing of personal data.

➔ *Data protection* [► 9]

► Registration process

The prompt occurs automatically during the first registration in the DTCO 4.1.

It occurs after selecting the country.

IMPORTANT

You can change the entries afterwards:
➔ *Menu point Entry driver 1/driver 2* [► 91]

Release ITS Data

IMPORTANT

To activate Bluetooth, you must have consented to the storage of the ITS data (➔ *Personal ITS data* [► 10]).

1 publish
ITS data? yes

Fig. 37: Retrieval of personal data

1. Use the buttons **▲/▼** to select **Yes** or **No**.
2. Acknowledge with the button **OK**.
A message about the storage of the entry is displayed:

entry stored

Fig. 38: Save confirmation

Release VDO Data




Fig. 39: Retrieval of personal special data

3. Use the buttons **▲/▼** to select **Yes** or **No**
4. Acknowledge with the button **OK**.
A message about the storage of the entry is displayed:



Fig. 40: Confirmation of second save

Activate Bluetooth

Activating Bluetooth can be carried out in this menu or later in the "Bluetooth" menu:

The description of the activation can be found here: → *Activating / deactivating Bluetooth* [► 93]

Completing the registration

Next follows the normal registration on the DTCO 4.1.

→ *Shift start – Inserting driver card* [► 49]

Operation by the contractor

Functions of the company card

Menu functions in the company mode

Registration – inserting company card

Inserting member state and vehicle registration number

Removing company card

Operation by the contractor

■ Functions of the company card

IMPORTANT

The purpose of the company card is solely the data management of the company, not the driving operation.

If you are driving with the company card, the message **!⚠ Drivins without valid card** is displayed.

IMPORTANT

Observing the country requirements.

The company ensures the correct use of the company cards.

- Please observe the legal requirements applicable in your country.

The company card is used to identify a company in the DTCO 4.1.

The company card is proof of the correct operation of the vehicle. The company card is used to assign the respective vehicle to the company in respect of all relevant data.

The company can request several company cards.

Independent of the drivers, the mass memory of the tachograph stores all vehicle movements and times.

The company is legally obliged to store this data and to make it accessible to the relevant supervisory authorities upon request.

The company card is valid for 5 years. A follow-on card can be requested 6 months before expiry of the current card at the earliest.

In case of damage, theft or loss of the card, the company must submit the following documents for a new application:

- in case of loss, a written declaration relating to the loss

- in case of theft, proof of the police report
- in case of damage or malfunction, the card which is to be replaced

When first inserting the company card, the company logs itself in on the DTCO 4.1 so that it is run as the tachograph of this company until logout or insertion of a different company card. This ensures the access rights to the data assigned to the company.

The company card offers the following options within its authorisation level:

- Logging in and out the company when using this DTCO 4.1, for example when selling the vehicle, expiry of the vehicle lease
- Entering the member state and the vehicle's registration number
➔ *Inserting member state and vehicle registration number* [p. 70].
- Access to the mass memory data and the data assigned to the company, e.g. events, disruptions, speed, driver's name

- Access to data from an inserted driver card
- Access to the front interface for authorised download of the mass memory data

In the EU, the data must be downloaded every 3 months from the mass memory.

In the following cases, it is also useful to download the data:

- Sale of the vehicle
- Immobilisation of the vehicle,
- When replacing the DTCO 4.1

■ Menu functions in the company mode

The navigation within the menu functions always follows the same system.

➔ *Navigating within menus* [▶ 42]

If the company card is inserted into drawer 2, all main menus which are assigned to this card drawer remain locked.

➔ *Menu access lock* [▶ 86]

In this case, you can only display, print out or download data from a driver card inserted in card drawer 1.

➔ *First menu level – Standard values* [▶ 75]

■ Registration – inserting company card

IMPORTANT

Operation by contractor equals the operating mode “Company” as per Implementation Regulation (EU) 2016/799 Annex I C, as amended.

- Insert the company card into a free card drawer;
➔ *Inserting card* [▶ 42].
By inserting the company card, the language stored on the card is set on the display.

IMPORTANT

You can set your preferred language individually.

➔ *Setting the language* [▶ 76]

The menu displayed guides you step by step to the complete operational readiness of the DTCO 4.1:



Fig. 41: Welcome display

For approx. 3 seconds, the name of the cardholder, the set local time **16:00** and the UTC time **14:00UTC** are displayed (time difference = 2 hours in summer time).

IMPORTANT

No entries are possible while the card is being read.

If a button is pressed, a message is displayed.

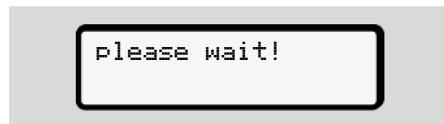


Fig. 42: Message - option I

Or

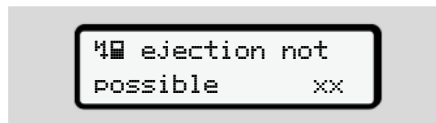


Fig. 43: Message - option II

The card information is being read:



Fig. 44: Reading the card information

The left side displays the number of the card drawer into which the card is inserted.

Next to it is the company's designation (read from the company card).

A progress bar shows the continued reading of the company card.

- Insert – if prompted – the country symbol and the vehicle registration of the vehicle:
→ Inserting member state and vehicle registration number [▶ 70]

- If not yet carried out on this DTCO 4.1, the company is now logged in:




Fig. 45: Logging in the company

The login has now activated the company lock until revocation.

This ensures that company-specific and also personal data of the driver assigned to this company are protected against access.

The standard display follows.

The DTCO 4.1 is in operating mode **Company**, symbol .

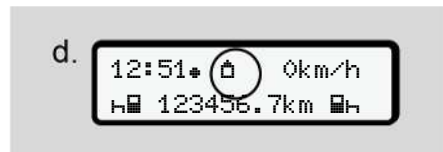


Fig. 46: Standard display with inserted company card

Result: The DTCO 4.1 is ready.

- You can only download mass memory data in order to archive and evaluate these according to legal requirements.
→ *Downloading data* [▶ 45]
- You can also access the data of an inserted driver card, e.g. to download it.
- Faults on the DTCO 4.1 or the system components are shown in the display. Confirm the message with the button **OK**.
→ *Meaning of messages* [▶ 102]

■ Inserting member state and vehicle registration number

Country identification and registration number are stored as standard during the installation and calibration by the authorised specialist workshop.

- If this was not the case, you will be prompted by the DTCO 4.1 during first insertion of the company to enter the following vehicle data:
 - Member state
 - Vehicle registration number.
→ *Inserting member state and vehicle registration number* [▶ 70]

The entries are stored in the DTCO 4.1.

IMPORTANT

Correctly entering the registration number.

You can only enter the registration number into the DTCO 4.1 once.

Therefore, please enter the registration number exactly as it appears on the vehicle.

After that, a change is only possible through an authorised specialist workshop using a workshop card.

Fig. 47: Prompt for entering the registration number

- Use the buttons **▲** **▼** to select **Yes** and confirm with button **OK**.
The request to enter the member state is displayed:




Fig. 48: Selection option Country

2. Select the country symbol of the member state using the buttons **▲/▼** and confirm using the button **OK**.

A pre-selection is available based on the issuing member state of the company card.

The following display prompts the entry of the registration number. The first position to be entered is flashing **_**.




Fig. 49: Entry of the registration number

3. Select the required characters using the buttons **▲/▼** and confirm using the button **OK**.

IMPORTANT

Using the button **⏮** you can navigate back step by step and amend entries.

- The next position to be entered is flashing **_**.
- 4. Repeat step 3 until you have entered the complete registration number. A maximum of 13 characters are allowed.
- 5. Confirm the entered registration number again using the button **OK**. Upon confirmation, a control printout is automatically created:



Fig. 50: Control printout

- The display shows the registration number again – with the option to correct it:




Fig. 51: Selection to confirm

6. Check if the registration number on the printout is correct.
7. Using buttons **▲/▼**:
 - to select **No** if the vehicle registration number is incorrect and confirm using button **OK**.

The display to step 1 is shown again and you can repeat your entries.

- **Yes** if the vehicle registration number is correct and confirm using button **OK**.

6

Country identification and registration number of the vehicle are stored in the DTCO 4.1.

If a change is required, e.g. due to a change of location, contact an authorised specialist workshop holding a workshop card.

■ Removing company card

IMPORTANT

To protect the data of your company and to prevent any misuse of the card itself, you should not leave it inside the vehicle.

You can only remove the company card from the card drawer when the vehicle is stationary.

IMPORTANT

For operating the ADR variant, the ignition must be switched on.

Please observe the special safety notes for the operation of the ADR variant of the DTCO 4.1 in explosive environments.

→ *ADR version (Ex version)* [▶ 23]



Fig. 52: Request company card (combination button)

- Keep the combination button for card drawer 1 or card drawer 2 pressed down for at least 2 seconds.



Fig. 53: Transferring the user data

- The company's name is displayed.
- A status bar shows the writing process of the company card.
- The logoff request is displayed.

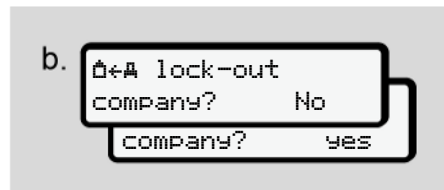





Fig. 54: Logging off the company on the DTCO 4.1

1. Use the buttons   to select:
 - **No:** The company is not logged off and the company lock remains activated.
 - **Yes:** The company is logged off and the company lock is deactivated.

Confirm using the  button.

IMPORTANT

Despite the deactivated company lock, your company data stored up to that point will remain locked for a third company.
However, newly recorded data is no longer locked.

IMPORTANT

A note is displayed in case a periodic verification of the DTCO 4.1 is due or the company card is expiring.

2. Remove your company card from the card drawer.
→ *Removing company card* [► 72]
The display shows:

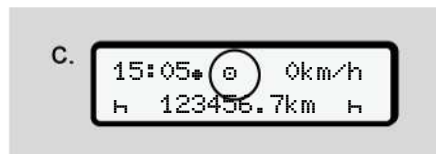



Fig. 55: Standard display without cards

The DTCO 4.1 is in "**operational**" mode again, symbol .

Menus

First menu level – Standard values

Second menu level – menu functions

Menus

■ First menu level – Standard values

► Display in stationary vehicle

This chapter describes the menus of the DTCO 4.1 which can be selected in a stationary vehicle.

Displays during journey → *Displays during journey* [► 40]

Starting point is the standard display (a), which is shown after “ignition on” in the display (default).

IMPORTANT

If activated, option **VDO Counter** may also be displayed as the standard display.

IMPORTANT

Menu functions for the display and the printout of driver data are only available if a corresponding card is inserted.

This way, e.g. the menu point **Printout driver 2** is only displayed if a driver card is inserted into card drawer 2.

IMPORTANT

The option VDO counter (*) is displayed as an example in the following graph. Description of the VDO Counter → *VDO Counter (option)* [► 77]

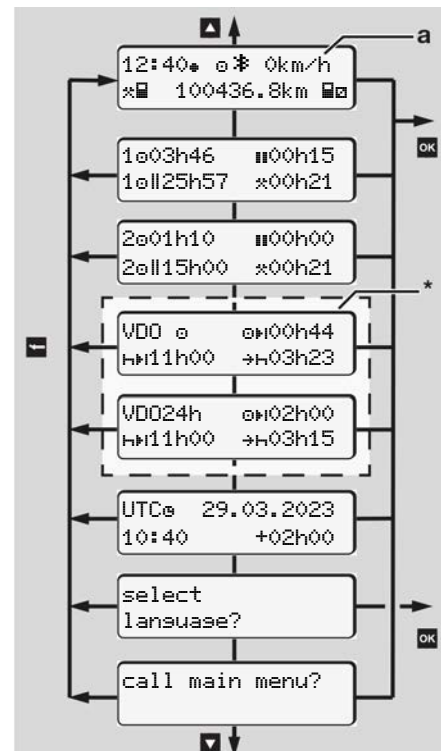


Fig. 56: First menu level
(* = Option VDO Counter)

7

Based on the standard display **(a)** as well as the corresponding inserted card, you can use the **▲/▼** buttons to request the following information:

- Standard display **(a)** (e.g. after “ignition on”)
- Two menus with information about the times of the inserted driver cards (1 = driver 1, 2 = driver 2)
→ *Display the times of the driver card* [▶ 76]
- (VDO) = Daily/weekly planning using the VDO counter (option)
→ *VDO Counter (option)* [▶ 77]
- (UTC) = The UTC time with date as well as the set time difference (offset) for the local time
→ *Set Local time* [▶ 96]
- The menu to set the desired language
→ *Setting the language* [▶ 76]

Use the key **↵** to return directly to the standard display **(a)**.

By pressing the **OK** button, you will go to the second level – to the menu functions.
→ *Second menu level – menu functions* [▶ 82]

► Display the times of the driver card

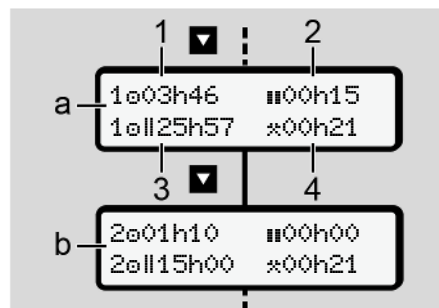


Fig. 57: Data from driver card 1 or 2.

(a)	Times of driver 1
(b)	Times of driver 2
(1)	Driving time ☐ driver 1 since a valid rest time
(2)	Valid rest time " " in break periods of at least 15 minutes and next 30 minutes, in accordance with regulation (EC) 561/2006

(3)	Sum of driving times over two weeks
(4)	Duration of the set activity

IMPORTANT

If no driver card is inserted, the times – except (3)– are displayed which correspond to the last status of card drawer 1 or 2, respectively.

► Setting the language

As standard, each driver card has the language of the request assigned for the displayed information (issuing authority).

You can adjust this default setting on each DTCO 4.1 by setting a different language.

The DTCO 4.1 remembers the set language by means of the card number of the inserted card.

Up to 5 languages can be stored.

1. Use the buttons **▲** / **▼** to select the **select language?** function and press the button **OK**.
2. Use the buttons **▲** / **▼** to select the desired language and confirm your selection with the button **OK**.

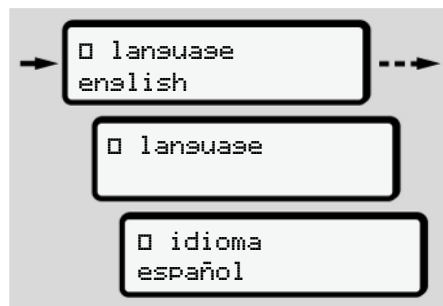


Fig. 58: Select the desired language

3. The DTCO 4.1 shows the successful storage of the language in the newly selected language.

► VDO Counter (option)

IMPORTANT

The VDO Counter can be activated optionally.

If necessary, contact your authorised specialist workshop.

The VDO Counter (option) supports your daily-/weekly planning by displaying the remaining driving and rest times.

IMPORTANT

Observe legal regulations.

Owing to possible different interpretations of Regulation (EC) 561/2006 and the AETR Regulations by the national

supervisory authorities and additional system restrictions, the following will continue to apply unreservedly:

The VDO counter does not release the user from the duty to record and independently evaluate driving, rest, standby and other working times in order to observe applicable provisions.

With other words: The VDO counter does not claim to be a generally valid, error-free display of the legal provisions.

Further information on the VDO Counter is available on the Internet at www.fleet.vdo.com

IMPORTANT

In order for the VDO counter to display valid information, the following conditions must be met for the evaluation of the data:

- Complete addition of your activities to the driver card.
→ *Manual entries (entry/addition)* [58]
- Correct setting of the current activity – no remote control; e.g. no unintentional setting of the activity working time **h** instead of daily rest time **H**.
→ *Setting activities* [54]
- Entry of ferry/train and your current activity.
→ *Ferry / train: Enter start / end* [95]

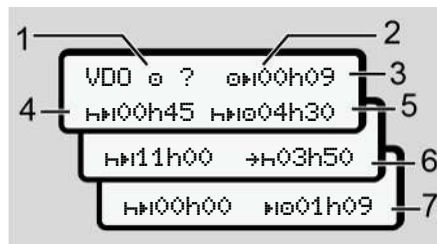
Description of the VDO Counter display

Fig. 59: VDO Counter - layout of the display

IMPORTANT

The flashing **h** means: This display part is currently active.

- (1) **Currently set activity**
- (2) **? = User information**

Periods with unknown activity **?** or insufficient data are recorded on the driver card (e.g. use of a new driver card).

The VDO counter evaluates missing activities, such as the activity **h**. If a relevant time overlap is deter-

ined in the driver activities, then this will be shown in the display by the **!** **00** symbol instead of the **?** symbol and the driver activity.

(3) Remaining driving time 0h

When driving: Displays how long driving may continued.

(**0h 00h00** = driving time completed)

(4) Remaining rest time HH


Length of the next required break/ rest time.

While the activity **h** is set, the remaining break time will be counted down. (**HH 00h00** = break finished).

(5) Future driving time HHh

Duration of the future driving time after having observed the break time / rest time.

(6) Latest start daily rest time +H

If, for example, the set activity , the remaining time to the start of your required daily rest time, is displayed.

(7) Start of the next driving time

The next driving time may only start after this time has lapsed.

VDO Counter – displays while driving

IMPORTANT

Please observe the working time specific country rules.

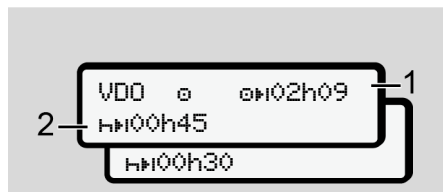



Fig. 60: Activity  – remaining driving time vs. daily rest time

- (1) Remaining driving time
- (2) At the latest after the end of the driving time displayed (1) a break or continuation of the cumulated break must occur.

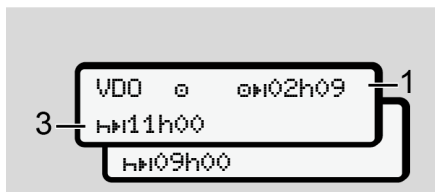



Fig. 61: Activity  – remaining driving time vs. daily rest time

- (3) At the latest after the end of the driving time displayed (1), a mandatory rest time must follow.
If allowed, the rest time can be taken in two parts, whereby the second part must cover an uninterrupted period of 9 hours.


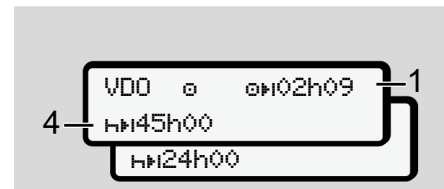



Fig. 62: Activity  – remaining driving time vs. weekly rest time

- (4) At the latest after the end of the driving time displayed (1), a periodic weekly rest time must follow.

If permitted, the upcoming weekly rest time can be shortened.



Fig. 63: Activity  – ferry/train vs. rest time continuation

- (5) The VDO counter detects the location on a ferry/train.

Requirement: Correct entry of this function:

→ *Ferry / train: Enter start / end*
[▶ 95].

At the latest after the end of the driving time (1), the daily rest time must be continued.




Fig. 64: Activity 0 – out of scope

- (6) The display of the remaining driving time is active (h flashes), a count-down takes place.

The VDO counter evaluates activity 0 as activity *

IMPORTANT

Please note that the calculations of the driving and rest times for the VDO counter occur according to Regu-

lation (EC) 561/2006 and not according to Implementation Regulation (EU) 2016/799 Annex I C, as amended.

Therefore, there may be deviations from the standard displays of the DTCO 4.1.

VDO Counter – displays for rest time activity

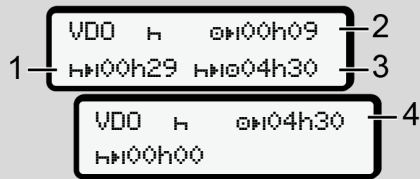


Fig. 65: Activity h – rest time vs. available driving time

- (1) Remaining rest time
- (2) Remaining driving time, if the rest time (1) is not observed.
- (3) Period of the next available driving time after the end of the rest time displayed (1).

- (4) Available driving time after a valid rest time.




Fig. 66: Activity h – rest time vs. available daily driving time

- (5) Remaining rest time.
- (6) Length of the available daily driving time after the end of the rest time (5).




Fig. 67: Activity h – daily rest time

- (7) Remaining daily rest period.
If permitted, split into 3 + 9 hours.

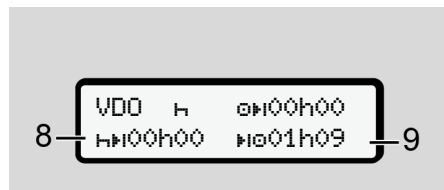


Fig. 68: Activity H – End of rest time

(8) Valid rest time complete.

The display 00h00 flashes for 10 seconds. If the rest time is continued, the VDO Counter changes to the period of the next daily or weekly rest time.

(9) Beginning of the next driving time.

Situation: The maximum weekly driving time or double weekly driving time has already been reached.

Although the valid interruption was observed, the VDO Counter recognises that a new driving period is only possible after the end of the displayed time.

VDO Counter – Displays for activity working time**IMPORTANT**

Please observe the working time specific country rules.

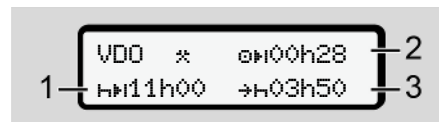


Fig. 69: Activity X – work time vs rest time

- (1) Duration of the next daily rest time
- (2) Remaining driving time
- (3) Start of the next daily rest time. At the latest before the displayed time comes to an end, a daily rest time must be kept.

Note:

Activity X is evaluated by the VDO counter during an interruption of the driving time comparable to activity H. (except for the daily rest time).

Use keys Δ / ∇ to retrieve further information.


VDO Counter – displaying daily values

Fig. 70: Activity X/Y – daily value

- (1) Symbol for the display of the daily values
- (2) Remaining daily driving time
- (3) Duration of the next daily rest time
- (4) At the latest before the displayed time comes to an end, a daily rest time must be kept.

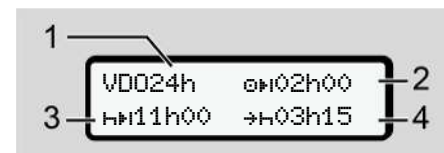7

VDO Counter – displaying weekly values

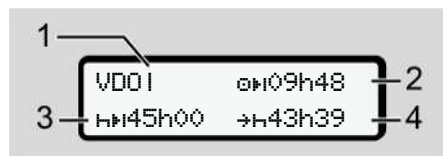


Fig. 71: Activity – Weekly values

- (1) Symbol for the display of the weekly values since the last weekly rest time
- (2) Remaining weekly driving time
- (3) Length of the weekly rest time. At the latest after six daily driving times, a weekly rest time must follow.
- (4) The weekly rest period must start before the displayed time comes to an end at the latest.

IMPORTANT

The displays in relation to weekly rest time (3) and (4) may be deactivated for the transnational passenger transport.

If the calculation of the weekly values was deactivated in the VDO counter, these values are not displayed.

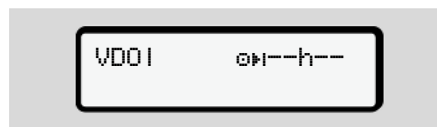


Fig. 72: Display deactivated calculation

VDO Counter – status display

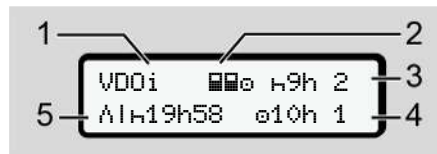


Fig. 73: VDO Counter – status display

- (1) Symbol for the status display
- (2) Symbol for crew operation
Is displayed if crew operation is used since the start of work. The VDO Counter observes the rules applicable in these calculations.
- (3) In this week, two more reduced daily rest times are permitted (max. 3x per week possible).

- (4) In this week, one more extended daily driving time of a maximum of 10 hours is permitted (max. 2x per week possible).
- (5) Reconciliation of a shortened weekly rest time

Due to a shortened weekly rest time, the time displayed must be reconciled, with a rest time of at least 9 hours.

IMPORTANT

The display for a shortened weekly rest time (5) may be deactivated for the transnational passenger transport.

If the evaluation of the weekly values in the VDO Counter is deactivated, the values are not displayed.

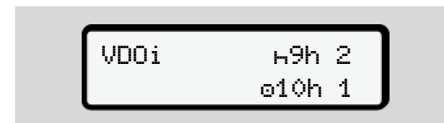


Fig. 74: Display deactivated calculation

■ Second menu level – menu functions

You can access the second menu level by pressing **■** on the first menu level or selecting the menu point **retriev-**
ins menu functions.

→ *First menu level – Standard values*
[▶ 75]

IMPORTANT

If you have selected a menu point but do not carry out an entry within 30 seconds, the DTCO 4.1 returns to the first menu level.

All inputs not confirmed up to that time are rejected.

IMPORTANT

The menu functions may be called up only if the vehicle is stationary.

If you and your vehicle are not in an explosive environment, the ignition must be switched on to operate the ADR version.

► Menu structure (overview)

> Printout **■▼** driver 1 1)

```

|-- 24h■▼ daily value
|-- !x■▼ event
|-- ■▼ activities

```

▼

> Printout **■▼** driver 2 2)

```

|-- 24h■▼ daily value
|-- !x■▼ event
|-- ■▼ activities

```

▼

> Printout **A▼** vehicle

```

|-- 24hA▼ daily value
|-- !xA▼ event
|-- >>▼ speed
|-- T▼ techn. data
|-- ■▼ cards
|-- ■▼ v-diaqram
|-- ■▼ status D1/D2
|-- %v▼ v-profiles
|-- %n▼ n-profiles

```

▼

> Entry **▼** driver 1

```

|-- ▶ start country
|-- ▶ end country
|-- ?▼ settings
|-- * Bluetooth
|-- Miscellaneous

```

▼

> Entry **▼** driver 2

```

|-- ▶ start country
|-- ▶ end country
|-- ?▼ settings
|-- * Bluetooth
|-- Miscellaneous

```

▼

> Entry **A▼** vehicle

```

|-- OUT▶ start / ▶OUT
  end
|-- ▶ start / ▶ end
  ferry/train
|-- ▶ Load/unload
|-- ▶ local time

```

7

```

|--- ⌚ Time company
|--- $ licence code
▼
> Display 🚗 driver 1 1)
|--- 24h🚗 daily value
|--- !x🚗 event
▼
> Display 🚗 driver 2 2)
|--- 24h🚗 daily value
|--- !x🚗 event
▼
> Display 🚗 vehicle
|--- 24h🚗 daily value
|--- !x🚗 event
|--- >>🚗 speed
|--- 🚗 techn. data
|--- 🚗 cards
|--- 🚗 company
|--- 🚗 Weight
|--- 🚗 DTC0 version
> Display control 3)

```

```

|--- 🚗 Serial number of 3)
|--- sensor

```

* Option

- 1) Menu functions only with driver card inserted in card drawer 1.
- 2) Menu functions only with driver card inserted in card drawer 2.
- 3) Only with inserted control card

► Navigating within menu functions

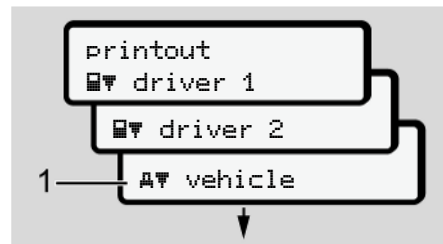


Fig. 75: Scrolling in (main) menu

1. Use the buttons **⬅**/**➡** to navigate to the required main menu (grey fields of previous list, e.g. to the printout of the vehicle data **(1)**).
Flashing in the 2. row **(1)** (in *italics*) indicates that there are further selection options.

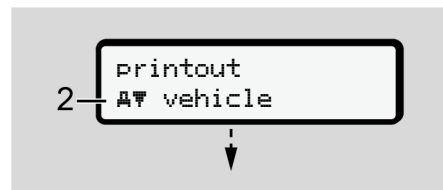


Fig. 76: Selection of a menu item

- Press the **OK** button if you want to get to the required function (2) with possible further selection options.



Fig. 77: Selection of a menu function

The selected menu point (3) is displayed, the further selectable functions are flashing in the 2nd row (4).

The display of the display and print menus is based on the inserted driver cards in driver drawer 1 and 2:

- If a driver card is inserted into card drawer 1, **printout driver 1** is displayed.
- If a driver card is inserted into card drawer 2, **printout driver 2** is displayed.

- If no driver card is inserted, only **Printout vehicle** is displayed.

This does not apply for the input menus.

- Use the **▲** / **▼** buttons to select the required menu point, e.g. the printout of the daily value (4) and confirm your selection with the **OK** button.

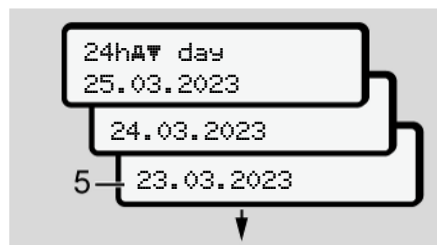


Fig. 78: Select the desired day

- Use the **▲** / **▼** buttons to select the required day and confirm that selection with the **OK** button.

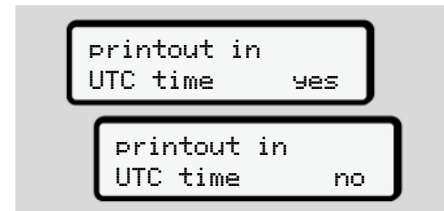


Fig. 79: No = printout in local time

- Use the **▲** / **▼** buttons to select the required printout type and confirm the selection with the **OK** button. For 3 seconds, the DTCO 4.1 indicates that a printout has started. You can cancel the printout.
→ *Cancel print* [▶ 118]

Next, the last selected menu item is displayed.

- Further action:
 - Select another printout with the **▲** / **▼** buttons.
 - Use the **ESC** button to return to the next higher menu level.

► Menu access lock

According to the regulations, access to stored data is regulated via access rights and implemented by means of corresponding tachograph cards.

Display example of a missing authorisation:

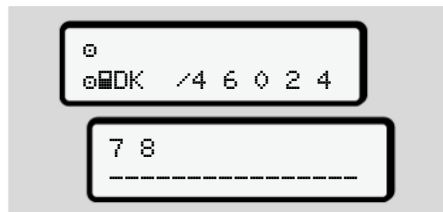


Fig. 80: Missing authorisation

The display of the expected data is incomplete. Personal data is partially or completely masked.


► Leaving menu functions

Automatically

The menu is exited automatically in the following situations:

- after a tachograph card is inserted or requested.
- After 1 minute of inactivity.
- With start of journey.

Manually

1. Press the  button.
 - The started selection or entry is terminated.
 - The next higher selection level is displayed again.
 - The subsequent request is displayed:

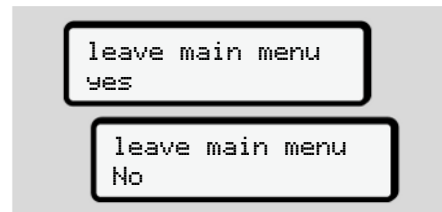






Fig. 81: Leaving menu function

2. Use the  /  buttons to select **Yes** and confirm with the  button.
Or use the  button to skip the query.
The display shows the standard display (a) again.

► Menu point printout driver 1/ driver 2

Using this menu point, you can print out the data of an inserted driver card.

Note:

- The procedure is identical for both driver cards.
- You can select the desired printing type prior to every printout.

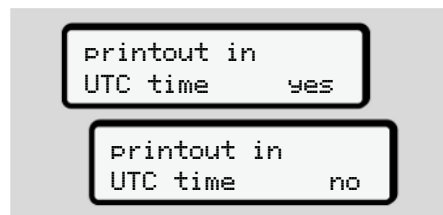


Fig. 82: No = Printout in local time

Print daily value

IMPORTANT

If possible, create the printout in the morning for the previous day. This way, you ensure that the last registered activity of the previous day is included.

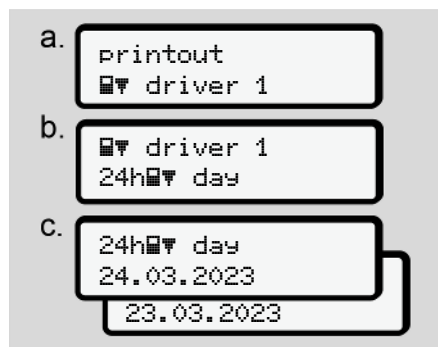


Fig. 83: Menu sequence printout – daily value for driver 1

Based on the selection, all activities of the selected day are printed.

→ *Printouts (examples)* [122]

Print events



Fig. 84: Menu sequence printout – events

Based on the selection, the saved events and malfunctions or those still active are printed.

→ *Technical data* [127]

Printing activities

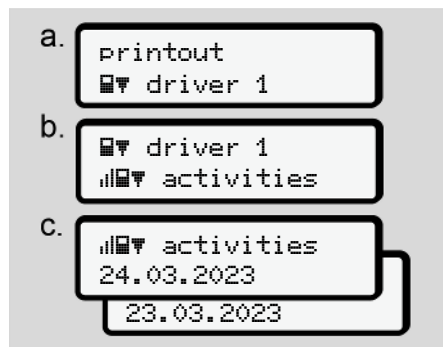


Fig. 85: Menu sequence Printout – activities

From the selected day onwards, a printout of all activities of the last 7 calendar days follows.

➔ *Driver activities* [▶ 128]

► Menu point printout vehicle

Use can use this menu point to print out the vehicle data from the mass memory.

Select the required function (described below).

Next, the required time is prompted.

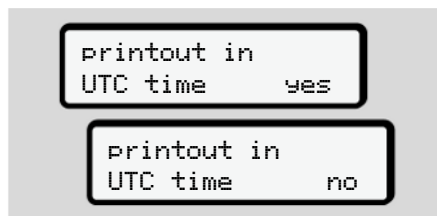


Fig. 86: No = Printout in local time

Print daily value

IMPORTANT

If possible, create the printout in the morning for the previous day. This way, you ensure that the last registered activity of the previous day is included.

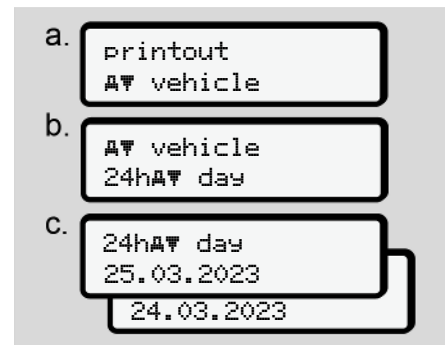


Fig. 87: Menu sequence printout – daily value for driver-1 and driver-2

Based on the selection, all driver activities are printed, separated chronologically by driver 1/ driver 2.

➔ *Daily printout of the vehicle* [▶ 124]

Printing out events [vehicle]

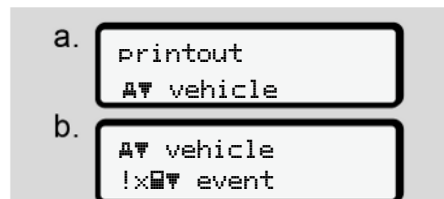


Fig. 88: Menu sequence printout – events vehicle

Based on the selection, the saved events and malfunctions or those still active are printed.

→ *Events / faults from the vehicle* [▶ 126]

Print instances of speeding

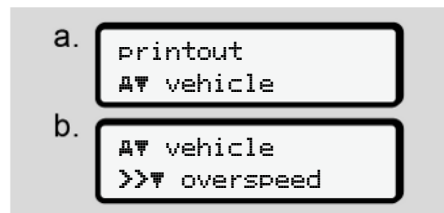


Fig. 89: Menu sequence printout – speeding

Based on the selection, excess speeds of the speed value set on the DTCO 4.1 are printed.

→ *Speeding events* [▶ 127]

Print technical data

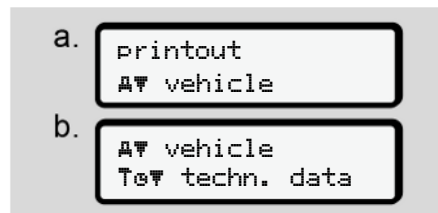


Fig. 90: Menu sequence printout – technical data

Based on the selection, data regarding vehicle registration, sensor identification and calibration are printed.

→ *Technical data* [▶ 127]

Printing information on inserted tachograph cards

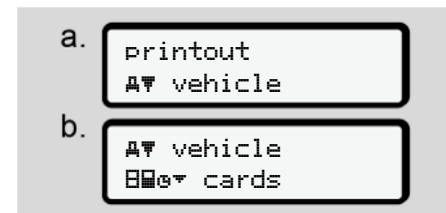


Fig. 91: Menu sequence printout – info tachograph cards

The data of all inserted tachograph cards is printed.

→ *Inserted tachograph cards* [▶ 129]

Printing v-diagram

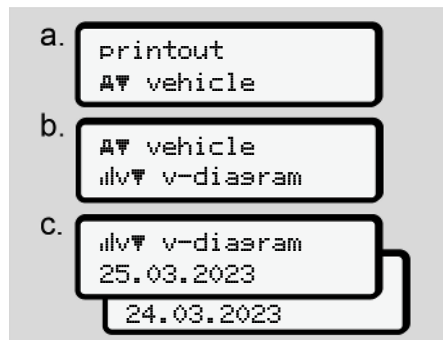


Fig. 92: Menu sequence printout – v diagram

From the selected day on, there is a printout of course of speed.

→ *v-diagram* [▶ 128]

Printing status D1/ D2 (option)

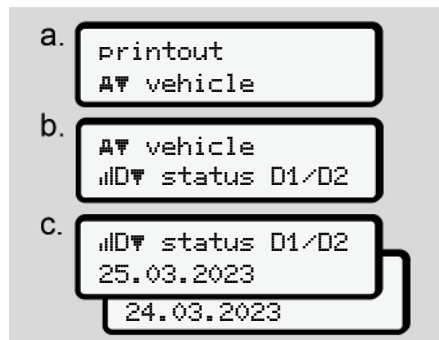


Fig. 93: Menu sequence printout – status D1/ D2

From the selected day onwards, a printout of the status inputs of the last 7 calendar days.

→ *Status D1/D2 diagram (option)* [▶ 128]

Printing speed profiles (option)

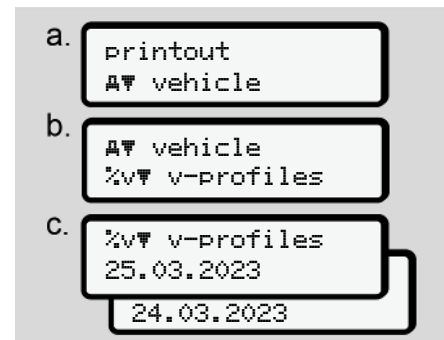


Fig. 94: Menu sequence printout – speed profile

Based on the selection, a profile printout of the speeds driven is performed.

→ *Speed profiles (option)* [▶ 129]

Printing speed profiles (option)

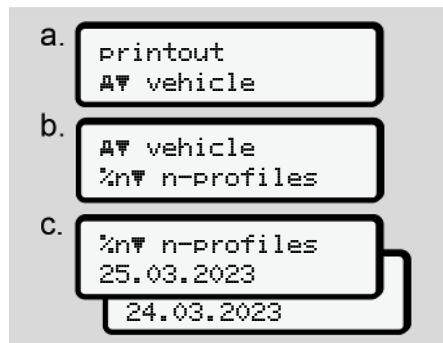


Fig. 95: Menu sequence printout – rpm profile

Based on the selection, a profile printout of the motor speed is performed.

→ *Rotation frequency profiles (option)*

[129]

► Menu point Entry driver 1/driver 2

Enter country

In addition to entering the country when inserting or removing the driver card, this can be done in this menu point.

IMPORTANT

According to the Regulation, both driver 1 and driver 2 must enter the country in which the shift starts or ends, into the tachograph.

Note:

- The procedure is identical for both drivers.

Start country

Select the listed functions step by step.

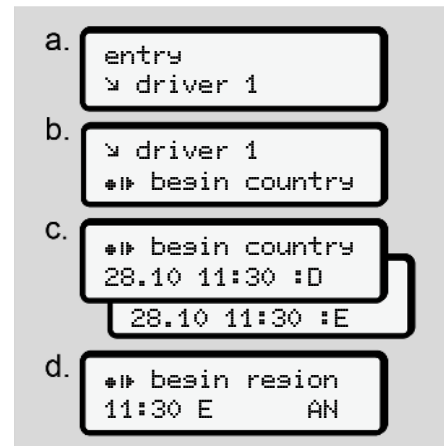


Fig. 96: Menu sequence entry – start country

IMPORTANT

Based on your location, DTCO 4.1 offers a list of countries from which you can choose when selecting a country.

In this pre-selection - with the exception of individual countries - no countries are listed that do not belong to the EU.

If you have “selected *Spain*” as the country, you will automatically be prompted to enter the region (**step d**).

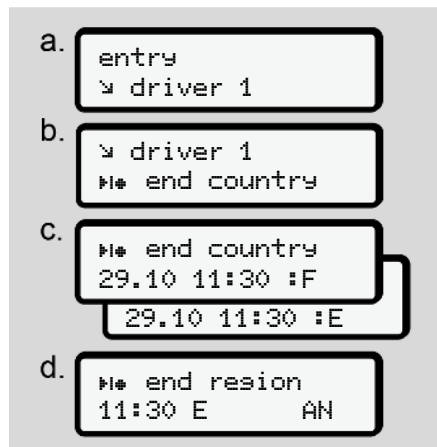
End country

Fig. 97: Menu sequence entry – end country

If you have selected “*Spain*” as the country, you will automatically be prompted to enter the region (**step d**).

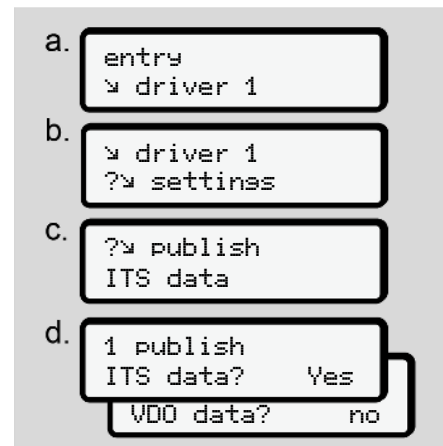
Settings**Changing settings to personal ITS data**

Fig. 98: Menu sequence entry – personal data

➔ Inserting driver card for the first time
[64].

Changing settings to personal VDO data

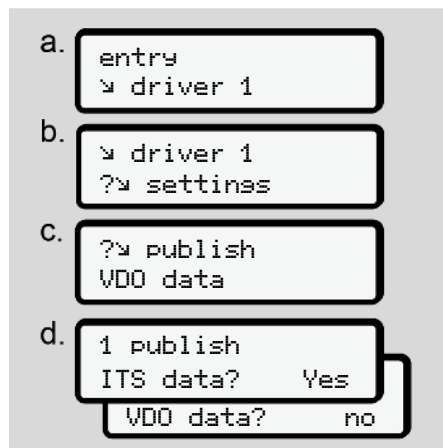


Fig. 99: Menu sequence entry – personal special data

➔ Inserting driver card for the first time [▶ 64].

My company

In this menu, you can enter the country in which your company is based.

Activating / deactivating Bluetooth

In this menu, you switch Bluetooth on or off.

1. Switch on Bluetooth on your external device.
2. On the DTCO, go to the “**Bluetooth**” menu.

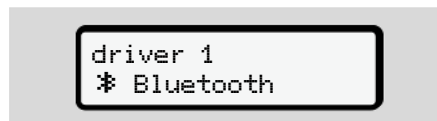


Fig. 100: Driver1 - Bluetooth

3. Press the **OK** button.

⇒ The display shows:



Fig. 101: Bluetooth pairing

4. Press the **OK** button.

⇒ The display shows:



Fig. 102: Request connect Bluetooth

5. Your external device now displays the DTCO in the Bluetooth menu.
6. Pair the DTCO on your external device (depending on the respective external device).
7. A 6-digit PIN appears on your external device and on the DTCO. The two PINs must match.




Fig. 103: Confirm pairing

8. Confirm “pairing” on your external device (depending on the respective external device).
9. Confirm the pairing on the DTCO by pressing the **OK** button.
10. Complete the pairing by pressing the **OK** button.

7

11. Pairing has been successfully completed.



entry stored

Fig. 104: Save confirmation

12. "✱" is now displayed in the top row of the standard display → *Displays* [▶ 40].

IMPORTANT

When removing the driver card, Bluetooth automatically becomes inactive. When re-inserting the driver card, Bluetooth automatically becomes active again.

IMPORTANT

When using the remote control, the user is responsible for the legal completeness and correctness and recognises this by using the remote control.

The use of the remote control is not part of the legal tachograph system. It is used on the operator's own responsibility.

The periods during which a remote control was used, can be printed and displayed.

→ *Daily printout of the vehicle* [▶ 124]

Miscellaneous

In this display, you can make user-specific entries.

► Menu point entry vehicle

Enter OUT start / end

If you are driving the vehicle outside of the scope of the regulation, you can set the function **out of scope** in the following menu and terminate if required.

The following journeys can be outside of the scope:

- Journeys on non-public roads.
- Journeys outside of AETR states.
- Journeys for which the total weight of the vehicle does not require use of the DTCO 4.1 in accordance with the regulations.

Select the listed functions step by step.

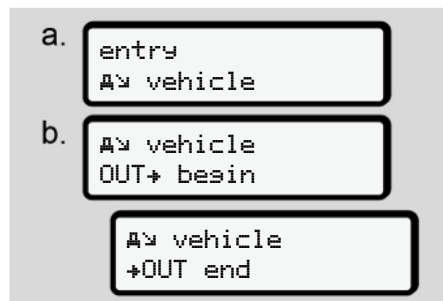


Fig. 105: Menu sequence entry – out start/end

IMPORTANT

The setting **out of scope** is automatically ended when you remove or insert a driver card.

Ferry / train: Enter start / end

Enter the location of the vehicle on a ferry or a train as soon as you have taken your position during shipping.

IMPORTANT

According to Regulation (EU)2016/799, Annex I C, as amended, recording **Ferry/train** must be started before the vehicle's engine is switched off on the ferry/train.

1. Select the following menu items:

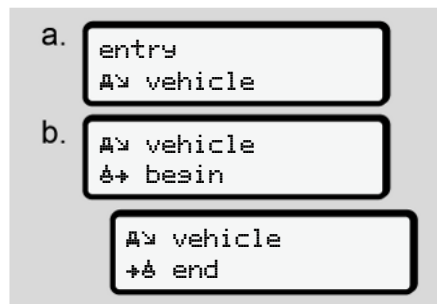


Fig. 106: Menu sequence entry – ferry/train

2. Set the start or end of the location on the ferry/train.

Recording of **ferry/train** is terminated as soon as this is switched off in the menu or the driver card is removed.

IMPORTANT

If the card is removed on the ferry/train and re-inserted, the entry **Ferry/train** must be reset.

7

Load/unload

In this menu, the DTCO 4.1 stores time and location of loading and unloading process.

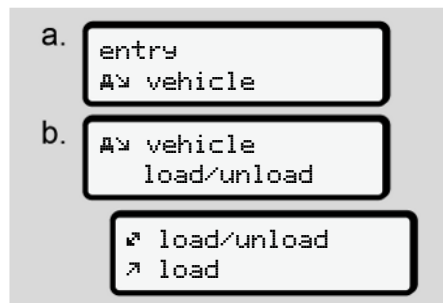


Fig. 107: Menu sequence load/unload

You can select the load process with the **↵** / **↵** buttons:

- **↵ load**
- **↵ unload**
- **↵ Load/unload**

Complete the entry with the **OK** button.

Set Local time

IMPORTANT

Firstly, familiarise yourself with the chapter "Time zones" before performing a change.

➔ *Time zones* [▶ 30]

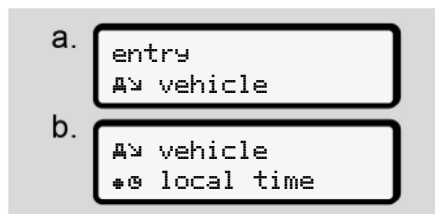


Fig. 108: Menu sequence entry – local time

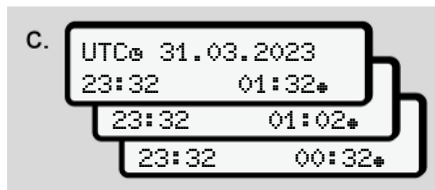


Fig. 109: Menu sequence entry – enter local time

For the standard display, you can adjust the time to the local time zone as well as to the start or end of summer time.

The latter occurs in steps of ± 30 minutes.

IMPORTANT

Please observe the legal requirements applicable in your country.

Setting the company local time

For ease of calculation of the working times, the DTCO 4.1 offers a working time counter which refers to the local time of the company.

This information can be requested via the front interface.

1. Select the following menu items:



Fig. 110: Menu sequence entry – local time

2. In step b you can enter date and hour of the company location and the difference from the UTC time.

Unlocking additional functions

When entering a licence code you can activate additional functions on the DTCO 4.1.

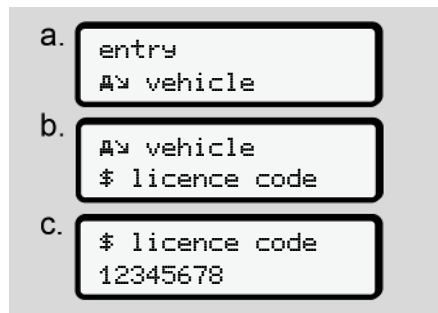


Fig. 111: Menu sequence entry – licence code

IMPORTANT

If the licence code has already been entered, it will be displayed in full and cannot be changed.

In this case, the additional functions are already activated.

IMPORTANT

The licence code can be purchased via the VDO online shop.

→ *VDO online shop* [162]

► Menu point display driver 1/ driver 2

You can use this menu point to display the data of your inserted driver card.

IMPORTANT

Comparable to a printout, the data is shown on the display, whereby one row of the printout (24 characters) is shown split in two rows.

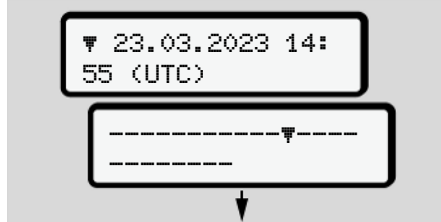


Fig. 112: Example for the data display

If, during scrolling through the information, you scroll back using buttons / you can only call up approx. 20 previous rows of the printout.

Use the button to leave the display.

Note:

- Calling up the functions to display the data is identical with the ones for printing the data. Therefore, they are not described any further below.
- It is possible to call up every display in local time.

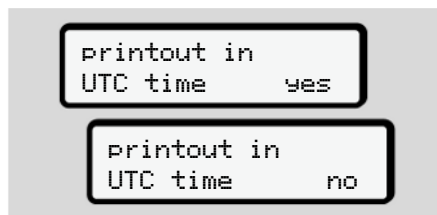


Fig. 113: No – printout in local time

- Select the possible displays for driver 1 or driver 2 step by step.

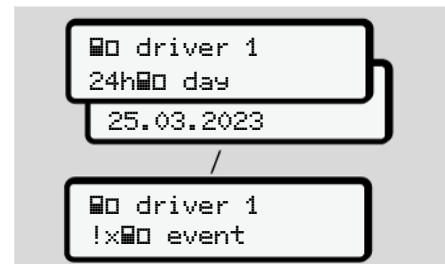


Fig. 114: Menu sequence display for driver 1

All activities of the selected days or all saved events or malfunctions or which are still active can be displayed by scrolling.

► Menu point display vehicle

You can use this menu point to display the data from the mass memory.

IMPORTANT

Comparable to a printout, the data is shown on the display, whereby one row of the printout (24 characters) is shown split in two rows.

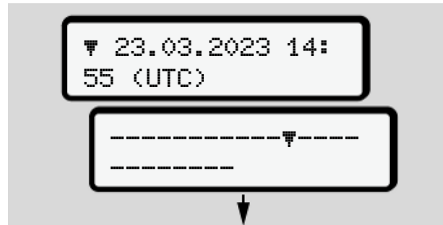


Fig. 115: Example for the data display

If, during scrolling through the information, you scroll back using buttons **◀** / **▶** you can only call up approx. 20 previous rows of the printout.

Use the button **⏏** to leave the display.

Note:

- Calling up the functions to display the data is identical with the ones for printing the data. Therefore, they are not described any further below.
- It is possible to call up every display in local time.

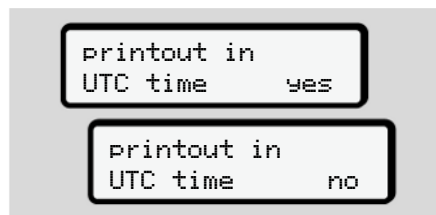


Fig. 116: No – display in local time

Select the listed functions step by step:

- displaying all driver activities in chronological order.
- displaying all saved or still active events and faults.
- displaying the instances when the set speed was exceeded.

- displaying data about vehicle identification, sensor identification, and calibration.
- Display data of the previously inserted tachograph card.
- display the number of the company card of the registered company. If no company is registered, **----** is displayed.
- Display current vehicle weight. (On-board weight system required)
- Display DTCO version and software version.

7

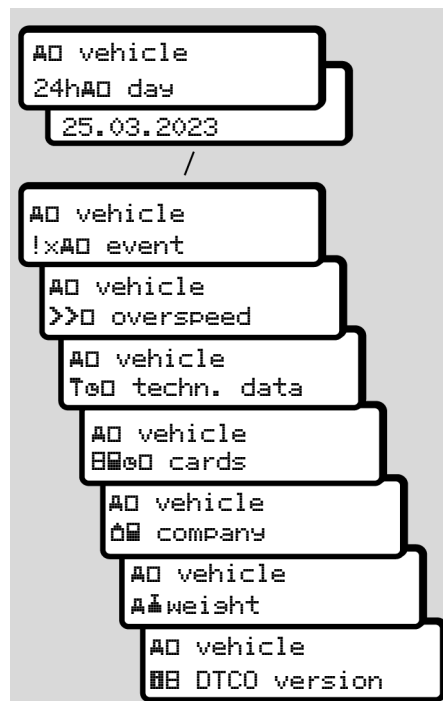


Fig. 117: Menu sequence display for vehicle

Messages

Meaning of messages

Special messages

Overview of possible events

Overview of possible malfunctions

Driving time warnings

Overview of possible operational notes

Messages

■ Meaning of messages

Errors in a component, in the device or in the operation will be displayed as a message immediately after occurring.

The following characteristics exist:

!	Event
×	Fault
⏸	Driving time warning
⏸	Operational note

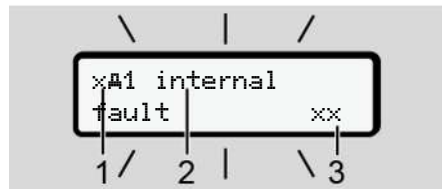


Fig. 118: Display of a message (flashing temporarily)

- (1) Pictogram combination, if necessary, with card drawer number
- (2) Plain text of the message
- (3) Error code

⚠ WARNING

Distraction due to device messages

There is a risk of distraction if messages are displayed on the device while driving or if the card is automatically ejected.

- Do not let yourself get distracted by message, but focus fully on the traffic.

IMPORTANT

In case of messages regarding a tachograph card, the number of the corresponding card drawer is displayed next to the pictogram.

► Characteristics of the messages

Events, malfunctions

- During the displays of events or disruptions, the background lighting of the display flashes for approx. 30 seconds.
The reason is displayed by means of a pictogram, plain text of the message and error code.
- You must confirm this message by pressing the **OK** button.
- The DTCO 4.1 stores the event or the disruption both in the mass memory and on the driver card (according to the storage provisions of the regulation). You can display or print this data through the menu function.

IMPORTANT

If an event keeps repeating itself, consult an authorised specialist workshop.

IMPORTANT**Procedure in case of malfunctions**

In case of a malfunction of the tachograph, you as the driver are obliged to record the details about activities which the tachograph no longer correctly records or prints on a separate sheet or on the back of the printout.

➔ *Recording activities manually* [p. 56]

Driving time warnings

- The message **driving time warnings** warns the driver of exceeding the driving time.
- This message is displayed with flashing background lighting and must be confirmed by pressing the **OK** button.

Operational notes

The operating notes are displayed **without** flashing background lighting and disappear (except for individual messages) automatically after 3 or 30 seconds.

DTCO 4.1-enabled display instruments

If a display instrument is installed in the vehicle which can communicate with the DTCO 4.1, the function control **T** indicates messages of the DTCO 4.1.

IMPORTANT

For detailed information, please read the operating manual for your vehicle.

► Acknowledgement of messages

1. Press button **OK**. You have confirmed the message and the background lighting stops flashing.
2. Re-press the button **OK**. The message disappears and the previously set standard display is shown.

Notes:

An operating note disappears after pressing the button **OK** for the first time. If there are several messages, you must confirm the messages one by one.

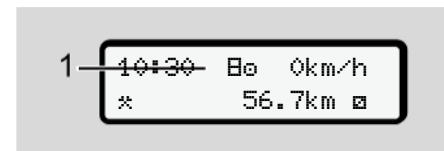
■ Special messages**► Production status**

Fig. 119: Standard display – production status

If the DTCO 4.1 is not yet activated as the recording equipment, the “production status” is “displayed, symbol **T** (1).

The DTCO 4.1 accepts only the workshop card.

IMPORTANT

Have the DTCO 4.1 be put into operation properly by an authorised specialist workshop.

8

► OUT (out of scope of regulation)

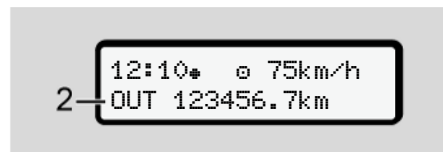


Fig. 120: Standard display – out of scope

If the vehicle is driven outside of the scope of the Regulation, the symbol **OUT (2)** is displayed.

→ Designations [► 10]

You can set this function through the menu

→ Enter OUT start / end [► 94]

By pressing any key, you can change to another display.

► Ferry/train

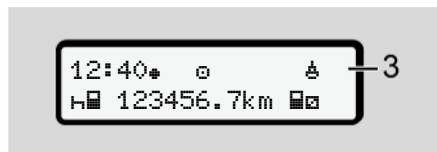


Fig. 121: Standard display – ferry/train

If the symbol **⚓ (3)** lights up, the vehicle is on a ferry or on a train.

You can set this function through the menu.

→ Ferry / train: Enter start / end [► 95].

IMPORTANT

Please ensure that this function and its current activity are set before the shipping process commences.

By pressing any key, you can change to a different display.

■ Overview of possible events

Message	Possible causes	Measure
!A Security breach	Error in the data memory; data security in the DTCO 4.1 is no longer ensured. The data from the sensor is no longer reliable. The DTCO 4.1 housing was opened without authorization.	Acknowledge message.
!A1 Security breach	The card lock is disrupted or faulty. The DTCO 4.1 no longer detects a tachograph card that was previously inserted correctly. The identity or authenticity of the tachograph card is not in order or the data recorded on the tachograph card is not reliable.	Acknowledge message. If the DTCO 4.1 detects security breaches which no longer guarantee the correctness of the data on the tachograph card, the tachograph card is automatically ejected – even while driving. Reinsert tachograph card or get it checked.
!+ Voltage interruption	The power was disconnected or the power supplied to the DTCO 4.1/ sensor was too low or too high. This message can also be displayed when the engine is started.	Acknowledge message.
!A Sensor fault	The communication with the sensor is interrupted. This message will also be displayed after a voltage interruption.	Acknowledge message.
!A1 Movement conflict	Contradiction in the evaluation of the vehicle movement between sensor and an independent signal source. The function (ferry/train) might not have been set during the shipping process.	Acknowledge message. Consult an authorised specialist workshop.
!% GNSS missing	No position data over three hours cumulative driving time.	Acknowledge message.

8

Message	Possible causes	Measure
!e Time conflict	There is a difference of more than one minute between the time of the internal clock of the DTCO 4.1 and the time information from the GNSS signal.	Acknowledge message.
!Y DSRC communication fault	A communication error has occurred between the DTCO 4.1 and the external DSRC-CAN module.	Acknowledge message. If this issue reoccurs, consult an authorised specialist workshop.
!e driving without valid card	Driving commenced without a driver card or without a valid driver card in card drawer 1. The message is also displayed if an unauthorised card combination is inserted before or after the journey.	Acknowledge message. Stop vehicle and insert valid driver card. If necessary, remove inserted company card/control card from the DTCO 4.1.
!e01 Insert while driving	The driver card was inserted after driving has begun.	Acknowledge message.
!e01 Time overlap	The set UTC time of this tachograph is behind the UTC time of the previous tachograph. This produces a negative time difference.	Acknowledge message. Confirm message. Identify the tachograph with the incorrect UTC time and make sure that an authorised specialist workshop inspects and corrects the tachograph.
!e1 Card invalid	The tachograph card has either expired, is not yet valid, or the authentication has failed. An inserted driver card which has become invalid after a change of day will be automatically written to and ejected (without request) after the vehicle becomes stationary.	Acknowledge message. Check tachograph card and insert it again.

Message	Possible causes	Measure
001 Invalid in days	The tachograph card expires soon.	Acknowledge message. Renew tachograph card.
!00 Card conflict	The two tachograph cards must not be inserted together in the DTCO 4.1. For example, the company card is inserted together with a control card.	Acknowledge message. Remove the corresponding tachograph card from the card drawer.
!0A1 card not closed	The driver card was not properly removed from the last tachograph. In some cases driver-based data will not be saved.	Acknowledge message.
>> Speeding	The set maximum speed was exceeded for longer than 60 seconds.	Acknowledge message. Reduce speed.
0A Calibration in days	The periodic inspection is due. A message will appear 28 days in advance.	Acknowledge message. Make an appointment with your workshop before the deadline.
0071 Download in days	The next card download is due. A message will appear 14 days before.	Perform download of the tachograph card.
0!End of normal operation in	The DTCO 4.1 certificate expires. A message will appear 92 days in advance when removing the card. The time of the message can be set with the company card and a test device or the app.	Make an appointment with your workshop to change the DTCO 4.1 before the deadline.
!Y? GNSS anomaly	Manipulations or external attacks.	Check for manipulation reasons. Check GNSS function.

■ Overview of possible malfunctions

Message	Possible cause	Measure
XA Internal fault	Serious fault in the DTCO 4.1, subsequent causes can be possible: Unexpected program or process time error.	Acknowledge message.
	Button elements blocked or pressed simultaneously for some time.	Check proper function of the button elements.
	Communication fault with external devices.	Get connecting cables or function of the external devices checked by an authorised specialist workshop.
	Communication fault with the instrument display.	Have connecting cables or function of the display instrument checked by an authorised specialist workshop.
	Fault at pulse output.	Have connecting cables or function of the connected recording equipment checked by an authorised specialist workshop.
xA1 Internal fault	Fault in the card mechanics, e.g. card lock is not closed.	Remove tachograph card and insert it again.
xA Time fault	UTC time of the DTCO 4.1 is not plausible or does not function properly. In order to avoid an inconsistency of data, newly inserted driver / company cards are not accepted.	Acknowledge message.

Message	Possible cause	Measure
xP Printer fault	The printer's supply voltage has failed or the temperature sensor for the printing head is defective.	Acknowledge message. Repeat process, possibly switching off/on ignition first.
xT Fault during download	Fault while downloading the data to an external device.	Acknowledge message. Repeat data download. Get connection cables (e.g. loose contact) or external device checked by an authorised specialist workshop.
xL Sensor fault	The sensor indicates an internal fault after a self-test.	Acknowledge message.
xM1 Card malfunction xM2 Card malfunction	During the reading/description process of the tachograph card, a communication fault has occurred, e.g. by dirty contacts. The data might not be fully recorded onto the driver card.	Acknowledge message. Clean tachograph card contacts and re-insert card.
x# Internal GNSS malfunction	An error has occurred on the GNSS - device: <ul style="list-style-type: none"> • Internal device error. • Short circuit of an external GNSS - antenna (option). • No connection to the external GNSS - antenna (option) 	Acknowledge message. Consult an authorised specialist workshop.

8

Message	Possible cause	Measure
x# Internal DSRC malfunction	An internal error on the DSRC module has occurred. An error has occurred on the antenna or it is not connected.	Acknowledge message. Get the DSRC module and connection cables as well as the function of the external antenna checked by an authorised specialist workshop.

■ Driving time warnings

Message	Meaning	Measure
401 Break! 1004h15 00h15	Take a break. This message is displayed after a continuous driving time of 04:15 hours.	Acknowledge message. Please plan a rest break soon.
401 Break! 1004h30 00h15	Driving time exceeded. This message is displayed after a continuous driving time of 04:30 hours.	Acknowledge message. Take a break.
401 Driving time 24h 03h15	End of daily (24h), weekly (I) or bi-weekly (II) driving time is or will be reached shortly. The pre-warning time can be configured.	Acknowledge message. End your driving time and take the valid rest time in accordance with the requirements.
401 Break in 00h1h45	Time for the next daily or weekly rest time is or will be reached shortly. The pre-warning time can be configured.	Acknowledge message. Plan your next break in a timely manner.

Message	Meaning	Measure
4x1 Work time 24h 09h30	End of daily (24h) or weekly (1) working time is or will be reached shortly. The pre-warning time can be configured.	Acknowledge message. End your driving time and take the valid rest time in accordance with the requirements.
4x1 Work time x 04h15	The end of the possible uninterrupted working time is or will be reached shortly. The pre-warning time can be configured.	Acknowledge message. Plan your next break in a timely manner.
4e1 Drivins time 24h 03h15	Pre-warning for reaching the maximum permitted expanded driving time	Observe this message. On arrival, observe the stipulated rest time.

IMPORTANT

The DTCO 4.1 registers, saves and calculates the driving times on the basis of the rules established by the regulation. It warns you, the driver, prematurely about exceeding your driving time.

However, these cumulative driving times do not anticipate the legal interpretation of **continuous driving time**.

► VDO Counter display (option)

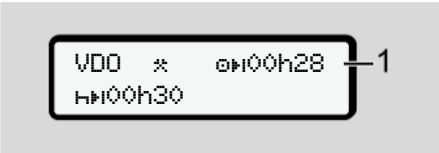


Fig. 122: VDO Counter – display

After confirming the second driving time warning, the VDO Counter indicates that your driving time (1) is complete (does not apply in case of Out of scope).

Take a break immediately.

■ Overview of possible operational notes

Message	Meaning	Measures
⚠ Please enter	If no entry occurs during the manual entry process, this prompt is displayed.	Press button OK and continue the entry.
⚠ Printout not possible	<p>A printout is not possible at the moment:</p> <ul style="list-style-type: none"> • because with ADR variants, the ignition is switched off, • because the temperature of the thermal printing head is too high, • the printer interface is occupied by another active process, e.g. a printout in progress, • or because the supply voltage is too high or too low. <p>A display is not possible at the moment because with ADR variants, the ignition is switched off.</p>	<p>You can request a printout as soon as the problem is removed.</p> <p>Switch on ignition and call the desired display again.</p>
⚠⚠ Printout delayed	An ongoing printout is interrupted or delayed because the temperature of the thermal printing head is too high.	Wait to cool. The printout will continue automatically as soon as the permissible state has been reached.
⚠ No paper	The printer has no paper or the printer drawer is not correctly inserted. The print request will be rejected and/or a printout in progress will be interrupted.	<p>Insert new roll of paper.</p> <p>Insert printer drawer correctly.</p> <p>An interrupted print process must be re-started via the menu function.</p>

Message	Meaning	Measures
4B Ejection not possible	<p>Requesting the tachograph card will be rejected.</p> <ul style="list-style-type: none"> • because data might currently be read or transferred, • the driver card needs to be read-in again within the registration time of one minute, • a day change according to UTC time is taking place, • the vehicle is moving, • or with ADR variants, the ignition is switched off. 	<p>Wait until the DTCO 4.1 enables the function or remove the problem: Stop the vehicle or switch on the ignition. Then request the tachograph card again.</p>
4B?1 Record inconsistent	<p>There is an inconsistency in the order of the dates in the data recorded on the driver card.</p>	<p>This message can be displayed until the faulty records have been overwritten by new data. If the message is displayed permanently, get the tachograph card checked.</p>
4B1 Eject card	<p>An error occurred when writing data on the driver card.</p>	<p>While the card is ejected, a new attempt is made to communicate with the card. If this attempt also fails, a printout of the last activities saved for this card is started.</p>
4B1 Card faulty	<p>An error has occurred when processing the inserted tachograph card. The tachograph card is not accepted and is ejected.</p>	<p>Clean the contacts of the tachograph card and insert it again. If the message is displayed again, check if another tachograph card is read in correctly.</p>

8

Message	Meaning	Measures
401 Wrong card	The inserted card is not a tachograph card. The card is not accepted and is ejected.	Insert valid tachograph card.
4A1 Internal fault	Fault in the card mechanics, e.g. card lock is not closed.	Remove tachograph card and insert it again.
4A Internal fault	Fault at pulse output.	Check connecting cables or function of the connected recording equipment.
4A Internal fault	The DTCO 4.1 has a serious fault or a serious time error has occurred. For example, an unrealistic UTC time. The tachograph card is not accepted and is ejected.	Make sure that an authorized specialist workshop checks the tachograph as soon as possible and replaces it, if necessary. Observe the note displayed in case of a malfunction of the tachograph. → <i>Events, malfunctions</i> [102]
001 Please clean card	The DTCO 4.1 has encountered problems reading or writing of the tachograph card.	Clean the tachograph card as well as the card drawers. → <i>Cleaning</i> [144]

► Operational notes as information

Message	Meaning	Measures
No data!	It is not possible to use the menu function: <ul style="list-style-type: none"> No driver card is inserted into the card drawer. A company card/control card is inserted into the card drawer. 	These notes disappear automatically after three seconds. No steps must be taken.
Printout started ...	Acknowledgement of the selected function.	
Entry saved	Acknowledgement that the DTCO 4.1 saved the entry.	
Display not possible!	No data can be displayed as long as the printing is in progress.	
please wait!	The tachograph card has not yet been read completely. It is not possible to call up menu functions.	These notes disappear automatically after three seconds. No steps must be taken.
OAS Calibration in days 18	The next periodical inspection is pending, for example in 18 days. Required inspections due to technical changes cannot be taken into account. An authorised specialist workshop can program from what day onwards this note is to be displayed. ➔ <i>Compulsory inspection</i> [► 144]	
001 Invalid in days 15	The released tachograph card is, for example, invalid in 15 days! An authorised specialist workshop can program from what day onwards this note is to be displayed.	

8

Message	Meaning	Measures
0071 Downloading in days 7	The next download of data from the driver card will be due in 7 days, for example (default). An authorised specialist workshop can programme from what day onwards this note is to be displayed.	

Print

Notes for printing

Starting print

Cancel print

Replacing the printer paper

Clear paper jam

Print

■ Notes for printing

IMPORTANT

At the start of each printout, there is an empty space of approx. 5 cm.

IMPORTANT


If desired, the printout can be customised with a company logo.

■ Starting print

IMPORTANT




Requirements for printing:

- The vehicle is stationary.
- With the ADR variant of the DTCO 4.1: Ignition is switched on.
- The paper roll is inserted.
- The printer drawer is closed.



driver 1
24h day

Fig. 123: Sample printout - Daily value

1. Use the buttons  and  and button  to select the required menu point
Printout driver 1 > Daily value:
→ *Navigating within menu functions*
[▶ 84]
2. Select and acknowledge the day and printout type (UTC or local time).

3. Printout commences after approx. 3 seconds.
Wait until the printout is complete.
4. Sever the printout at the cutting edge.



Fig. 124: Sever printout

IMPORTANT

Make sure that the card drawers are closed when tearing off a printout to avoid paper particles getting into the drawers or the card feed getting damaged.

■ Cancel print

- Press button **OK** again to cancel the printout early.
The following prompt is displayed:

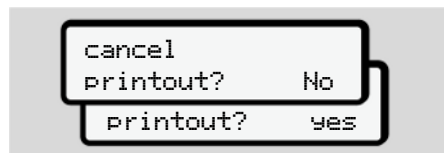


Fig. 125: Cancel print

Select required function using buttons **▲/▼** and confirm using button **OK**.

■ Replacing the printer paper

► End of paper

- A coloured mark on the rear side of the printout will be displayed shortly before the paper roll is empty.
- When the paper has run out, the following message is displayed:

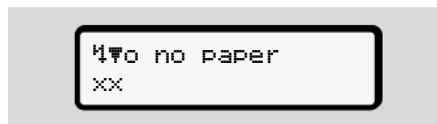


Fig. 126: Notice – no paper

- If the paper runs out during a printout: After inserting a new paper roll, restart the printout using the menu function.

► Replacing the paper roll

IMPORTANT

Use only original VDO printer paper which bears the following markings:

- Tachograph type (DTCO 4.1) with test mark **84**
- Approval mark **174** or **189**.



Fig. 127: Press the unlock button

- Press the unlock are on the printer panel inwards.
The printer drawer opens.

⚠ CAUTION

Danger of burns

The button may be hot.

- Do not reach into the printer compartment after having removed the printer drawer.

IMPORTANT

Damage by objects

To prevent the printer getting damaged:

- Do not insert any objects into the printer compartment.

- Hold the printer drawer on both sides and pull it out of the printer.

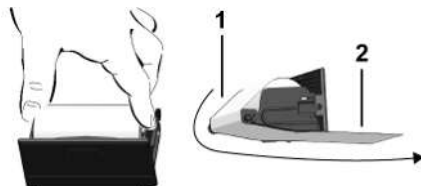


Fig. 128: Insert paper roll

- Insert the new paper roll end down into the printer drawer.
- Guide the paper with the part printed grey to the feed over the guide pulley (1).

IMPORTANT

Make sure that the paper roll in the printer drawer does not get jammed and the start of the paper roll (2) is visible under the edge of the printer drawer (tear-off edge).

- Push the printer drawer into the printer compartment until it engages.

The printer is ready for operation.

■ Clear paper jam

In case of paper jam:

- Open the printer drawer.
- Separate the crumpled paper from the paper roll and remove any remaining paper from the printer drawer.
- Reinsert the paper roll and push the printer drawer into the printer compartment until it engages.
➔ *Replacing the printer paper* [▶ 119]

Printouts

Retaining printouts

Printouts (examples)

Explanation to the printouts

Data set for events or faults

Printouts

■ Retaining printouts

Take care that the printouts will not be damaged by strong light, sunlight, moisture, or heat (making them illegible).

The holder of the vehicle / the company must retain the legal printouts for at least 1 year.

■ Printouts (examples)

► Daily printout of the driver card

1	▼ 10.03.2023 14:55 (UTC)
	GEN2
1	GEN2 v2
2	24h▼
3	□ Schmitt Peter □ID /12345678901234 5 6 07.03.2025 - GEN 2
3a	○ Rosenz Winfried □DK /45678901234567 7 8 07.03.2026 - GEN 2
4	A ABC12345678901234 D /VS VM 612
5	B Continental Automotive Technologies 1381.1550333010 GEN2 v2
6	T NFZ-Profi Service & Ve rtrieb TID /87654321087654 3 2 T 07.01.2023
7	□ID /12345678901234 5 6 □ 09.02.2023 11:11▼
8	07.03.2023 310
8a	? 00:00 06h00 □ 06:00 00h17
8b	A D /VS VM 612 95 872 km

8c
8e
8a
8b
8c
8a
8c
8d
8e
8a
11
11a

```

* 06:17 00h45
* 07:02 00h39 ee
o 07:41 01h19 ee
95 958 km 86 km

? 09:00 00h24
-----2-----
A S /LCR 243
205 002 km
o 09:24 02h30 ee
* 11:54 00h39

? 12:33 00h10
-----1-----
o 12:43 02h27
h 15:10 01h12
o 16:22 00h16
o 16:38 00h42
A:12:25
A:13:42
o 17:20 00h52
* 18:12 00h24
h 18:36 00h02
96 177 km 305 km

? 18:38 05h22
-----Σ-----
* 06:00 D
lat + 48°05.2'
lon + 8°26.1'
06:01
95 872 km
* 12:43 D
lat + 48°05.2'
lon + 8°26.1'
12:43
96 177 km
09:01
* 09:00
lat + 48°05.2'
lon + 8°26.1'
09:01

```

11d
12
12c
13
13c
23

```

* 18:38 CH
205 408 km
o 04h54 317 km
* 02h27 o 03h29
h 01h14 ? 11h56
ee 04h28
-----!x-----
x 0 07.03.2023 12:45
x40 00h04
A D /VS VM 612

! 0 07.03.2023 09:23
!34 ( 0) 00h01
A D /VS VM 612

A D /VS VM 612
-----!x-----
>> 5 13.02.2023 16:42
!07 ( 2) 00h12
o 98765432109876 5 4
o 12345678901234 5 6

>> 4 15.02.2023 11:10
!07 ( 95) 00h30
o DK /45678901234567 7 8
o F /12345678901234 5 6

x 0 16.02.2023 12:45
x40 ( 5) 00h04
o DK /45678901234567 7 8

* Friedrichshafen
* Schmitt Peter
* Regenz Winfried

```

Things to note with Daily printout of the driver card

8f
8g
8h

```

* 12345678901234 5 6
o 07.03.2023 11:11
-----o-----
10.03.2023 310
-----? !ee ?-----

? 00:00 06h00
o 06:00 00h17
-----1-----

A D /VS VM 612
95 872 km
* 06:17 00h45
* 07:02 00h39 ee
o 07:41
-----kmΣ-----
* 06:00 D
95 872 km
o 00h00 km

-----o-----
10.03.2023 310
-----OUT-----
-----1-----
A D /VS VM 612
95 872 km
h 00:00 07h02
* 07:02 00h39

```

10


► Events / faults from the driver card

1	▼ 10.03.2023 11:11 (UTC)
	GEN2
1	GEN2 v2
2	!x 80 km/h
3	o Schmitt Peter
	o /12345678901234 5 6 07.03.2023 - GEN 2
3a	o Rosenz Winfried
	o /45678901234567 7 8 03.03.2023 - GEN 2
4	A ABC12345678901234 D /VS VM 612
12a	!+ 07.03.2023 02:14 !08 06h03 A S /LCR 243
12c	!e 07.03.2023 18:12 !05 00h01 A D /VS VM 612
	!e 08.03.2023 08:12 !05 00h05 A D /S VD 432
	!+ 08.03.2023 10:15 !08 00h10 A D /VS VM 612
	!L 09.03.2023 08:45 !09 00h01 A D /VS VM 612

12c	!e 13.02.2023 09:23 !22 00h01 A D /VS VM 612
12b	!e 15.02.2023 16:04 !11 01h02 A D /VS VM 612
12c	x 22.02.2023 12:45 x40 00h04 A D /VS VM 612
22	x 17.02.2023 18:02 x40 00h03 A D /VS VM 612
	x 03.02.2023 01:54 x35 00h04 A D /S VD 432
	o Schmitt Peter Rosenz Winfried


► Daily printout of the vehicle

1	▼ 10.03.2023 16:55 (UTC)
2	GEN2 v2
3	o Schmitt Peter
	o /12345678901234 5 6 07.03.2023 - GEN 2
4	A ABC12345678901234 D /VS VM 612
5	B Continental Automotive Technologies 1381.1550333010 GEN2 v2
6	T NFZ-Profi Service & Ve rtrieb
	T /87654321087654 3 2 T 22.02.2023
7	o /12345678901234 5 6 o 03.03.2023 11:11
9	10.03.2023
10	95 872 96 284 km
10a	95 872 km 00:00 06h17 95 872 km 0 km
10b	o Rosenz Winfried
	o /45678901234567 7 8 07.03.2023
10c	A+S /LCR 243 10.02.2023 18:54
10d	95 872 km M


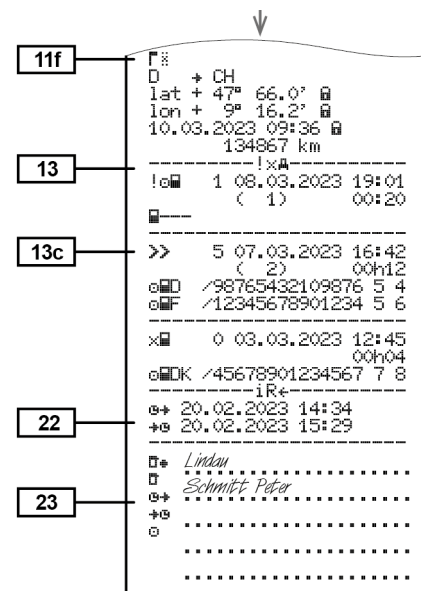


10

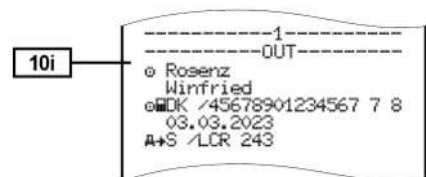Things to note with Daily printout of the vehicle



► Events / faults from the vehicle

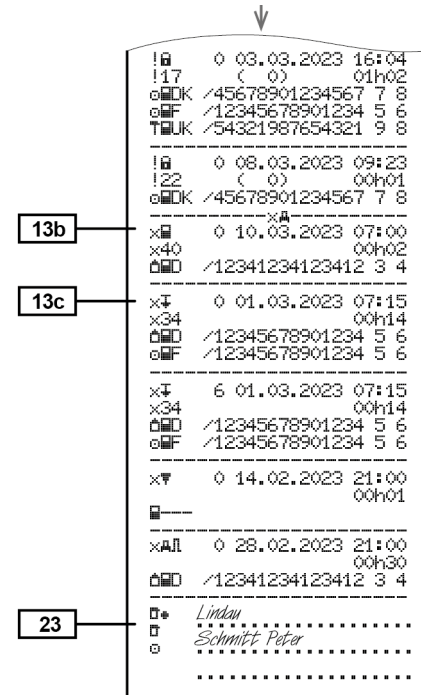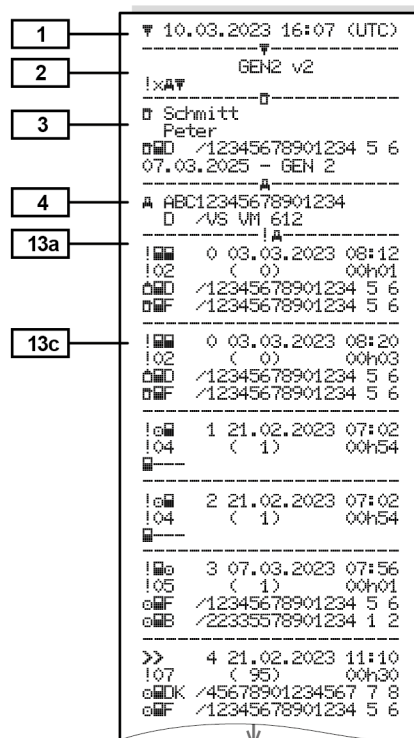

► Speeding events

1	▼ 10.03.2023 14:50 (UTC)
	----- ▼ GEN2 v2 -----
2	>>▼ 90 km/h ----- ○ -----
3	○ Mustermann Heinz-Dieter ○MF /12345678901234 5 6 16.06.2023 - GEN2 ----- ▲ -----
4	A ABC12345678901234 D /VS VM 612 ----- >> -----
19	>>03.03.2023 14:15 >>17.02.2023 17:44 (7) ----- >>↑ -----
21	>>28.02.2023 14:02 00h06 98 km/h 92 km/h (1) ----- ○ Förster Thomas ○ID /98765432109876 5 4 ----- >>(365) -----
21c	>>08.03.2023 11:10 00h30 98 km/h 95 km/h (95) ----- ○ Rosenz Winfried ○DK /45678901234567 7 8 -----
21a	----->>(10)----- >>14.02.2023 17:10 00h15 94 km/h 92 km/h (12) ----- ○ Mustermann Heinz-Dieter ○MF /12345678901234 5 6 ----- □● ----- ○ -----
21b	
21c	
23	Mustermann Heinz

► Technical data

1	▼ 10.03.2023 14:50 (UTC) GEN2 v2
2	Te▼
3	◻ Spedition Mustermayer ◻ /12341234123412 3 4
3a	◻ Mustermann ◻ Heinz-Dieter ◻ /12345678901234 5 6 16.06.2023 - GEN2
4	◻ ABC12345678901234 D /VS VM 612
14	◻ Continental Automotive Technologies H. Hertz-Str.45 78052 VS-Villinsen 1381.1550333010 e1-84 1234567890 2023 GEN2 v2 V 41xx 03.02.2023 r N21-202225
15	◻ 87654321 e1-175 08.03.2023 09:15
16	T 87654321 e1-175
16a	Y 0011030746 0622 6 A1
17	T Fa. Mustermann & NFZ- Hersteller Schillerstr. 10 Muster kirchen
17a	T ◻ /45678901234567 8 9 07.03.2023 T 28.03.2023 (01)
17b	◻ ABC12345678901234

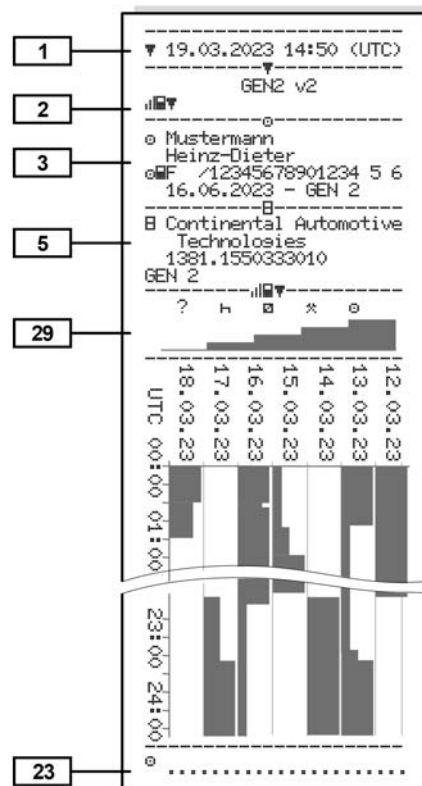
W 8 000 Imp/km
 k 8 000 Imp/km
 l 3 050 mm
 • 315/70/R22.5
 > 90 km/h
 0 - km
 H
 D 07.03.2023 08:18
 B 7 BP 11223344

18
 18a
 19
 27
 28
 28a
 2a


10.03.2023 14:00
 10.03.2023 15:00
 T Fa. Mustermann & NFZ-
 Hersteller
 Schillerstr. 10 Muster-
 kirchen
 TMD /45678901234567 8 9
 14.03.2025
 03.03.2023 13:00
 03.03.2023 13:26
 T Kienzle ARGO GMBH
 Bismarckstr. 19 Berlin
 -Steslitz
 TMD /89012345678901 5 6
 21.03.2025
 07.03.2023 06:34
 09.03.2023 18:15
 B ATTACHMENT
 SHUM
 V xxx.xxx
 Seal: 12345678
 S/N: 1234567890 7
 02.2023
 MC: A17
 GEN2 v2

10


► Driver activities



► v-diagram

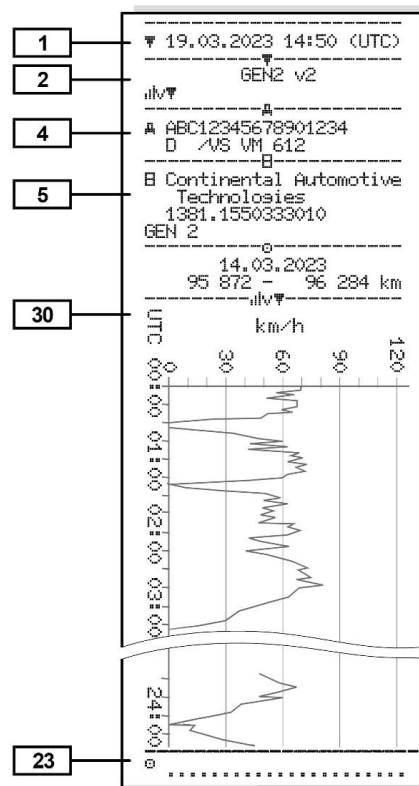

► Status D1/D2 diagram (option)

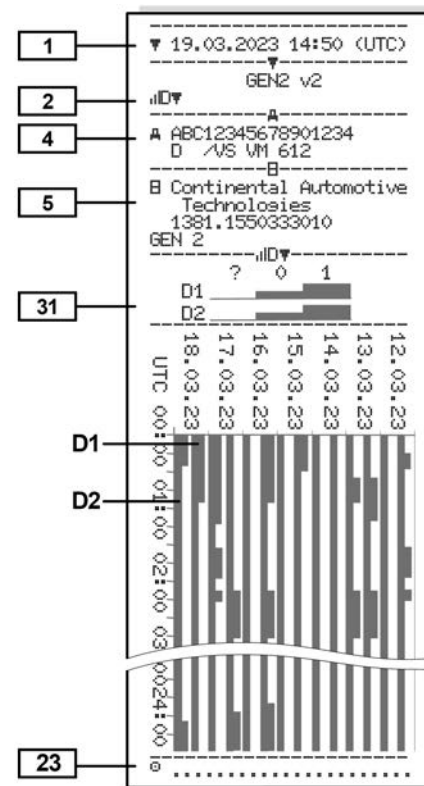

► Speed profiles (option)

1	▼ 10.03.2023 14:50 (UTC)
2	GEN2 v2
3	Mustermann Heinz-Dieter /12345678901234 5 6 16.06.2023 - GEN2
4	A ABC12345678901234 D /VS VM 612
19	>>03.03.2023 14:15 >>17.02.2023 17:44 (7)
21	>>28.02.2023 14:02 00h06 98 km/h 92 km/h (1)
21c	o Förster Thomas /98765432109876 5 4 >>(365)
21a	>>08.03.2023 11:10 00h30 98 km/h 95 km/h (95)
	o Rosenz Winfried /45678901234567 7 8
21b	>>(10) >>14.02.2023 17:10 00h15 94 km/h 92 km/h (12)
21c	o Mustermann Heinz-Dieter /12345678901234 5 6
23	Mustermann Heinz

► Rotation frequency profiles (option)

1	▼ 10.03.2023 17:05 (UTC)
2	GEN2 v2
3	Speidition Mustermüller /12341234123412 3 4 20.03.2024 - GEN2
4	A ABC12345678901234 D /VS VM 612
	07.03.2023 00:00 07.03.2023 06:17 ---rpm---
24	3281 <=n< × 00h00
	o Mustermann Heinz-Dieter 07.03.2023 18:37 08.03.2023 00:00 ---rpm---
26	0 <=n< 1 05h02 1 <=n< 234 00h00 234 <=n< 469 00h00 469 <=n< 703 00h00 703 <=n< 938 00h00 938 <=n< 1172 00h00 1172 <=n< 1406 00h03 1406 <=n< 1641 00h03 1641 <=n< 1875 00h04 1875 <=n< 2109 00h09 2109 <=n< 2344 00h02 2344 <=n< 2578 00h00 2578 <=n< 2812 00h00 2812 <=n< 3047 00h00 3047 <=n< 3281 00h00 3281 <=n< × 00h00
23	o

► Inserted tachograph cards

1	▼ 10.03.2023 14:50 (UTC)
2	GEN2 v2
3	Mustermann Heinz-Dieter /12345678901234 5 6 16.06.2023 - GEN2
32	o GEN1 0000 AD /12345678901234 5 6 0000513205 14.02.2023
	o GEN2 0101 163 /1234567890000 0 0 0287705177 14.02.2023 18:42
	GEN2 v2

► Printout in local time

33	!!! No legal printout!!!
34	07.03.2023 01:00 08.03.2023 01:00 UTC +01h00
35	08.03.2023 15:55 (LOC)
36	24h GEN2 v2
	o Rosenz Winfried o /45678901234567 7 8 14.03.2024
	A ABC12345678901234 D /VS VM 612
	B Continental Automotive Technologies 1381.1550333010 GEN 2
	T NFZ-Profi Service & Ve rtrieb T /87654321087654 3 2 T 03.03.2023
	o /12345678901234 5 6 o 10.02.2023 12:11

■ Explanation to the printouts

1	10.03.2023 14:50 (UTC)
2	GEN2 v2
3	Te
4	10.03.2023 14:50 102 () 00h01 /12345678901234 5 6 /12345678901234 5 6
5	10.03.2023 08:20 102 () 00h03
6	GEN2 v2
7	Te

Fig. 129: Explanations to the printouts

1	Printout heading with date and time (UTC)
2	Boundary line
3	Generation of tachograph card (from 2nd generation)
4	Symbols of the selection printout (here "technical details", for example)
5	Data record identifier of the respective data record
6	Boundary line
7	Printout end symbol. Again with the symbols of the selected printout (according to point 4)

► Key to the data blocks

[1]	Generation of tachograph card according to Annex I B (GEN1) and Annex I C (GEN2 and GEN2 v2). Date and time of the printout in UTC time.
-----	--

IMPORTANT

The shown printouts to the driver cards show a case where first or second generation driver cards are inserted into the DTCO 4.1.

Special cases:

- If a first generation driver card is inserted, the daily printout is carried out as in previous versions of the DTCO, without the identification GEN1 and GEN2.
- In case of a printout of a driver card of the second generation of a day on which cards were inserted in a DTCO 3.0 or older, all blocks (GEN1 and GEN2) are printed out, but the






GEN2 blocks are empty. For the activities, the time display is shown as 00:00.


[2]	Type of printout: <ul style="list-style-type: none"> • 24h = daily printout of the driver card • ! = events/faults of the driver card • 24hA = daily printout from the DTCO 4.1 • ! = events / faults of the DTCO 4.1 • >> = speedings The set value of the legally permitted maximum speed set is also printed. • T = technical data • A = driver activities • v = v-diagram Optional printouts: <ul style="list-style-type: none"> • D = status D1/D2 diagram* • %v = speed profiles*
-----	---

- **%n** = rpm profiles *
- * = Option



[2a]	End of printout symbol
[3]	Information about the card-holder of the inserted tachograph card: <ul style="list-style-type: none"> C = controller D = driver A = contractor T = workshop/Inspection body • Name • First name • Card identification • Card valid until ... • Generation of the tachograph card (GEN1, GEN2 or GEN2 v2) Note: For non-personal tachograph cards, the name of the control body, the company or the workshop is printed instead of the name.






[3a]	Information about the card-holder of the other tachograph card
[4]	Vehicle identification: <ul style="list-style-type: none"> Vehicle identification number Authorising member state and vehicle registration number
[5]	Identification of the DTCO 4.1: <ul style="list-style-type: none"> Tachograph manufacturer Part number of the DTCO 4.1 Generation of the vehicle unit (GEN1, GEN2 or GEN2 v2)
[6]	Most recent calibration of the DTCO 4.1: <ul style="list-style-type: none"> Name of workshop Workshop identification Date of calibration
[7]	Most recent control: <ul style="list-style-type: none"> Control card identification

	<ul style="list-style-type: none"> Date, time, and type of control  = downloading from the driver card  = downloading from the DTCO 4.1  = printing  = displaying
[8]	List of all driver activities in the order they appear: <ul style="list-style-type: none"> Calendar day of the printout and the usage meter (number of days that the card was used)
[8a]	? = Time period that the card was not inserted: <ul style="list-style-type: none"> Manually entered activities after insertion of the driver card, with pictogram, start and duration.
[8a1]	 = Type of load at start of day <ul style="list-style-type: none"> If card is inserted in the DTCO 4.1, otherwise empty.


[8b]	Insertion of driver card into drawer (card drawer -1 or card drawer 2): <ul style="list-style-type: none"> Authorising member state and vehicle registration number Odometer reading when card inserted
[8c]	Activities of the driver card: <ul style="list-style-type: none"> Start and duration as well as driving status  = crew operation
[8d]	Specific conditions: <ul style="list-style-type: none"> Time of entry and pictogram for example: Ferry or train
[8e]	Withdrawal of driver card: <ul style="list-style-type: none"> Odometer reading and distance travelled since most recent insertion
[8f]	Warning: Possible inconsistency in the data recording since this day was saved twice on the tachograph card
[8g]	Activity not complete:

	<ul style="list-style-type: none"> Duration of activity and daily summaries might be given incompletely when printouts are made while the driver card is inserted
[8h]	The specific condition “OUT of scope” was activated at the start of the day.
[9]	Start of list of all driver activities in the DTCO 4.1: <ul style="list-style-type: none"> Calendar day of the printout Odometer readings at the times 00:00 and 23:59
[10]	Chronology of all activities from card drawer 1
[10a]	Time period in which no driver card was inserted in card drawer 1: <ul style="list-style-type: none"> Odometer reading at the start of the time period Set activity or activities in this time period

	<ul style="list-style-type: none"> Odometer reading at the end of the time period and distance travelled
[10b]	Insertion of the driver card: <ul style="list-style-type: none"> Last name of driver First name of driver Card identification Card valid until ...
[10c]	<ul style="list-style-type: none"> Authorising member state and registration number of the previous vehicle Date and time card was removed from the previous vehicle
[10d]	<ul style="list-style-type: none"> Odometer reading when driver card inserted  = the entry was done manually
[10e]	List of activities: <ul style="list-style-type: none"> Pictogram of the activity, start and length as well as driving status  = crew operation





[10f]	Entry time and pictogram of a specified condition: <ul style="list-style-type: none">  = start ferry/train  = end ferry/train OUT  = start (recording equipment not required) +OUT = end
[10g]	Withdrawal of driver card: <ul style="list-style-type: none"> Odometer reading and distance travelled
[10h]	Chronology of all activities from card drawer 2
[10i]	The specific condition “OUT of scope” was activated at the start of the day.
[11]	Daily summary
[11a]	Entered locations: <ul style="list-style-type: none">  = start time with country and region, if required (Spain)  = end time with country and region, if required (Spain)

	<ul style="list-style-type: none">Vehicle odometer reading Position data (only for second generation driver cards) <ul style="list-style-type: none">Chronological listing of position data at start and end of working time as well as after every three hours cumulative driving time			
[11b]	Summary of times with no driver card in card drawer 1: <ul style="list-style-type: none">Entered locations in chronological order (no entry in example)Total activities from card drawer 1			
[11c]	Summary of times with "no driver card" in card drawer 2: <ul style="list-style-type: none">Entered locations in chronological order (no entry in example)Total activities from card drawer 2			
		[11d]	Daily summary "Total values of activities" from the driver card: <ul style="list-style-type: none">Total driving time and distance travelledTotal working and standby timeTotal rest time and unknown timeTotal time in crew activities	
		[11e]	Summary of the activities, chronologically arranged by driver (cumulative for each driver for both card drawers): <ul style="list-style-type: none">Last name, first name, card identification of the driver🕒 = start time with country and region, if required (Spain) 🕒 = end time with country and region, if required (Spain)	
				<ul style="list-style-type: none">🕒 = loading with time and position data 🕒 = unloading with time and position dataPosition data (chronological), after every 3 hours cumulative driving time and up to shift end (here only shift end)Activities from this driver with:<ul style="list-style-type: none">Total driving time and distance travelled,total working time and total availability time,total rest time,total time in crew activities.
		[12]	List of the five most recent saved events or faults on the driver card	
		[12a]	List of all saved events on the driver card, arranged according to type of fault and date	

[12b]	List of all saved faults on the driver card, arranged according to type of fault and date	[13a]	List of all recorded or continuing events of the DTCO 4.1		
[12c]	Data record of the event or fault <i>Row 1:</i> <ul style="list-style-type: none"> Pictogram of the event or fault Date and start <i>Row 2:</i> <ul style="list-style-type: none"> Events subject to security breach are broken down with an additional code see "Data set for events or faults" Duration of the event or fault <i>Row 3:</i> <ul style="list-style-type: none"> Authorising member state and registration number of the vehicle in which the events or faults appeared. 	[13b]	List of all recorded or continuing faults of the DTCO 4.1		<ul style="list-style-type: none"> Number of similar events on that day See "Number of similar events" Duration of the event or fault <i>Row 3:</i> <ul style="list-style-type: none"> Identification of the driver cards inserted at the start or at the end of the event or the fault (maximum of four entries)  is displayed if no driver card is inserted
[13]	List of the last five saved or still active events/malfunctions of the DTCO 4.1	[13c]	Data record of the event or fault <i>Row 1:</i> <ul style="list-style-type: none"> Pictogram of the event or fault Coding of data record purpose. See "Data set for events of faults" Date and start <i>Row 2:</i> <ul style="list-style-type: none"> Events subject to security breach are broken down with an additional code see "Coding for more detailed description" 	[14]	Identification of the tachograph: <ul style="list-style-type: none"> Tachograph manufacturer Address of the tachograph manufacturer Part number Type approval number Serial number Year of manufacture

	<ul style="list-style-type: none"> • Version and date of installation of the user software • Version of the saved digital card 				
[15]	Identification of the sensor: <ul style="list-style-type: none"> • Serial number • Type approval number • Date/time of the last coupling with the DTCO 4.1 		<ul style="list-style-type: none"> – 01 = activation; recording of known calibration data at the time of activation – 02 = first installation, first calibration data after activating the DTCO 4.1 – 03 = installation after repair – replacement device; first calibration data in the current vehicle – 04 = periodic inspection – 05 = entry of the registration number by the company – 06 = time adjustment without Calibration (GNSS) – 80 = serial number of the new KITA seal – 81 = Ability to use first generation tachograph cards is suppressed – 82 = Installation or replacement of the motion sensor 		<ul style="list-style-type: none"> – 83 = Installation or replacement of the remote communication module
[16]	Identification of the GNSS module				<ul style="list-style-type: none"> • Vehicle identification number
[16a]	Identification of the DSRC				<ul style="list-style-type: none"> • Authorizing member state and registration number
[17]	Calibration data				<ul style="list-style-type: none"> • w = vehicle characteristic coefficient
[17a]	Listing of the calibration data (in data records): <ul style="list-style-type: none"> • Name and address of the workshop • Workshop identification • Workshop card valid until ... 				<ul style="list-style-type: none"> • k = set constant in the DTCO 4.1 for speed adjustment • l = actual circumference of tyres • r = tyre size • > = legally permitted maximum speed • Old and new odometer reading • / ℓ = Standard type of load of the vehicle • Country in which the calibration was carried out, as well as date and time
[17b]	<ul style="list-style-type: none"> • Date and purpose of the calibration: 				

	<ul style="list-style-type: none"> • = Data of seals (up to 5 data sets), 1 row for each used seal 		<ul style="list-style-type: none"> • = Most recent fault, date, and time 		<ul style="list-style-type: none"> • Date, time, and duration of speeding
[18]	Time settings				<ul style="list-style-type: none"> • Highest speed and Ø speeding, number of similar events on that day • Last name of driver • Card identification of the driver
[18a]	Listing of all available data about time setting: <ul style="list-style-type: none"> • Date and time, old • Date and time, changed • Name of workshop that set the time • Address of workshop • Workshop identification • Workshop card valid until ... 		[20] Information on speeding control: <ul style="list-style-type: none"> • Date and time of the most recent control • Date and time of the first instance of speeding since the most recent control and the number of subsequent speeding instances 		<p>Note: If within a block no data set exists for a case of speeding, --- is displayed.</p>
			[21] First instance of over-speeding since the most recent calibration		
		[21a] The five most serious cases of speeding in the last 365 days			
[18b]	<p>Note:</p> <p>In the second data record it can be seen that the UTC time was corrected by an authorised workshop</p>		[21b] The 10 most recently recorded instances of speeding. For each day the most severe instance of speeding is recorded.		[22] Periods with activated remote control: <ul style="list-style-type: none"> • = Start time • = End time <p>Note: Recording is made separately for driver 1 and driver 2. The times of both drivers are indicated on the printout, even when they are the same.</p>
[19]	The most recently recorded event and the current fault: = Most recent event, date, and time		[21c] Entries in cases of speeding (in chronological order after highest Ø speed):		[23] Handwritten information: <ul style="list-style-type: none"> • = Location of control

	<ul style="list-style-type: none">•  = Signature controller•  = Start time•  = End time•  = Signature driver		<ul style="list-style-type: none">• by a day change,• by a correction of the UTC time,• by a voltage interruption.		The rpm profile is divided into 16 zones. During installation, the individual ranges can be adjusted individually.
[24]	Information about the cardholder of the recorded profile: <ul style="list-style-type: none">• Last name of driver• First name of driver• Card identification <p>Note:</p> <p>Missing information about the cardholder means: no driver card inserted in card drawer 1.</p> <ul style="list-style-type: none">• start of the profile recording with date and time• End of the profile recording with date and time <p>New profiles are created:</p> <ul style="list-style-type: none">• by inserting/removing a tachograph card in card drawer 1,	[25]	Recording of speed profiles: <ul style="list-style-type: none">• List of the defined speed ranges and period in this range• Area: $0 \leq v < 1$ = vehicle is stationary <p>The speed profile is divided into 16 zones. During installation, the individual ranges can be adjusted individually.</p>	[27]	Manufacturer-specific data: <ul style="list-style-type: none">• Version number of the software upgrade module (SWUM)
		[26]	Recording of rpm profiles: <p>List of defined engine rotation frequency areas and period in this area:</p> <ul style="list-style-type: none">• Area: $0 \leq n < 1$ = motor off• Range: $3281 \leq n < x$ = unlimited	[28]	Number of the housing seal on the DTCO 4.1
				[28a]	Sensor-specific data: <ul style="list-style-type: none">• Serial number of sensor• Extended serial number and equipment type• Month and year of production• Manufacturer code <p>NOTE:</p> <p>Serial number and type approval number of the sensor will be printed only after activation.</p>
				[28 b]	DCRC module <ul style="list-style-type: none">• Serial number of the DSRC module


	<ul style="list-style-type: none"> • Device type <ul style="list-style-type: none"> – 6 = DTCO – 9 = external DSRC module • Month and year of production • Manufacturer code
[28 c]	Seals <ul style="list-style-type: none"> • Manufacturer code • Seal number • Location of sealing <ul style="list-style-type: none"> – 7 = sensor to the transmission, e.g. KITAS 4.0 2185 – 12 = M1N1 adapter with the vehicle
[29]	Recording of the activities: <ul style="list-style-type: none"> • Legend of the symbols • From the selected day, a diagram showing the activities of the last seven calendar days is created

[30]	Recording of the course of speed on the selected day
[31]	Recording of additional work groups, such as use of blue light, siren etc.: <ul style="list-style-type: none"> • Legend of the symbols • From the selected day on, there are profiles of status inputs D1/D2 of the last 7 calendar days.
[32]	Chronological listing of inserted driver cards
[33]	Please note: No authorised printout. According to the Regulation (e.g. retention requirement), a printout in local time is invalid
[34]	Period of the printout in local time: 🕒➕ = start of recording ➕🕒 = end of recording UTC +01h00 = difference between UTC time and local time.

[35]	Date and time of the printout in local time (LOC).
[36]	Type of printout, e.g. in local time „🕒“

■ Data set for events or faults

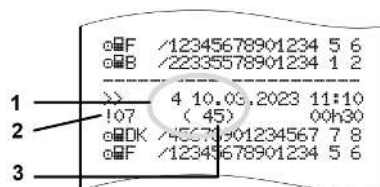For each established event or each established fault, the DTCO 4.1 will register and save the data according to the specified rules.



- (1) Purpose of the data set
- (2) EventFaultType according to Annex I C
- (3) Number of similar events on that day

The data record purpose (1) indicates why the event or fault was recorded. Events of similar type which occur several times on the same day, are shown on position (2).

IMPORTANT

Click on the green links or on the plus and/or minus button to open or close the explanation.

The following overview shows the events and faults arranged according to error type (cause) and the assignment of the data record purpose:

→ Coding of data set purpose [140]

→ Number of similar events [141]

Events which constitute a safety violation „!❗“ are broken down using an additional coding (1 in table below):

→ Coding for more detailed description [142]

► Coding of data set purpose

The following overview shows the events and faults, arranged according to error type (cause) and the assignment of the data record purpose.

Pictogram	Cause	Purpose
!❗	Card conflict ²⁾	0
!❗	Driving without appropriate card ²⁾	1/ 2 / 7
!❗	Insertion while driving	3
!❗	Card not closed	0
>>	Speed too high ²⁾	4 / 5 / 6
!⚡	Voltage interruption	1 / 2 / 7
!⚡	Sensor fault	1 / 2 / 7
!⚡	Movement conflict ⁴⁾	1 / 2
!❗	Security breach	0
!❗	Time overlap ¹⁾	-
!❗	Card invalid ³⁾	-

tab. 1: Events

Picto-gram	Cause	Purpose
	Card fault	0
	Internal fault	0 / 6
	Printer fault	0 / 6
	Faults during down-load	0 / 6
	Sensor fault	0 / 6

tab. 2: Faults

- 1) This event will be saved only on the driver card.
- 2) This event / fault will only be saved in the DTCO 4.1.
- 3) This event is not stored by the DTCO 4.1.
- 4) This event / fault will be saved in the DTCO 4.1 and on the second generation driver card.

Overview Data record purpose

Purpose	Meaning
0	One of the most recent event or malfunction.
1	The longest event of one of the last 10 days on which an event occurred.
2	One of the five longest events in the last 365 days.
3	The last event of one of the last 10 days on which an event occurred.
4	The most serious event of one of the last 10 days on which an event occurred.
5	One of the 5 most serious events in the last 365 days.
6	The first event or the first malfunction after the last calibration.
7	An active event or an ongoing malfunction.

Number of similar events

Purpose	Meaning
0	For this event, it is not necessary to save "Number of similar events".
1	An event of this type appeared on this day.
2	Two events of this type appeared on this day, but only one was saved.
n	On this day, <i>n</i> events of this type have occurred and only one was stored.

► Coding for more detailed description

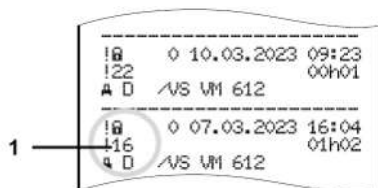


Fig. 130: Coding explanations

Events which are subject to a safety violation are broken down using an additional coding (1).

Security breaching codes on the DTCO 4.1

Code	Meaning
10	No additional information
11	Failed authentication of the sensor
12	Authentication errors of the driver cards
13	Unauthorised changes to the sensor
14	Integrity error; the authenticity of the data on the driver card is not assured.
15	Integrity error, the authenticity of the saved user data is not assured.
16	Internal data transmission error
18	Manipulation of the hardware
19	Manipulation detection with GNSS

Safety-breaching attempts on the impulse sensor

Code	Meaning
20	No additional information
21	Failed authentication
22	Integrity error, the authenticity of the memory data is not assured.
23	Internal data transmission error
24	Unauthorised opening of the casing
25	Manipulation of the hardware

Maintenance and inspection obligation

Cleaning

Compulsory inspection

Maintenance and inspection obligation

■ Cleaning

► Cleaning the DTCO 4.1

- Clean the DTCO 4.1 with a lightly dampened cloth or a microfibre cleaning cloth.
- If necessary, clean the card drawers with a suitable cleaning card ➔ *Cleaning cards and cleaning wipes* [▶ 162]

Both can be obtained from your Distribution & Service Center.

ATTENTION

Avoid damage

- Do not use any abrasive cleaning agents and not solvents or petrol.

► Cleaning tachograph card

- Clean any dirty tachograph contacts with a lightly moistened cloth or a microfibre cleaning cloth.

The latter is available at your competent Sales & Service Centre.

ATTENTION

Avoid damage

Do not use solvents or petrol to clean the tachograph contacts.

■ Compulsory inspection

Preventive maintenance work is not required for the DTCO 4.1.

- However, have the proper functioning of the DTCO 4.1 checked at least every two years by an authorised workshop.

Inspections are required if the following points have occurred:

- Changes have been made to the vehicle, e.g. to the distance pulse count or the tyre circumference.
- Repairs were carried out on the DTCO 4.1.
- The registration number of the vehicle has changed.
- The UTC time deviates by more than 20 minutes.

! ATTENTION**For inspections, please note**

- Make sure that the calibration plaque is renewed during every inspection and that it contains the required data.

IMPORTANT**Faulty entry in the KITAS 4.0 2185**

- A power cut can result in a faulty entry in the KITAS 4.0 2185.

Troubleshooting

Data backup by the workshop

Overvoltage/undervoltage

Error card communication

Printer drawer defect

Automatic ejection of tachograph card

Troubleshooting

■ Data backup by the workshop

The authorised workshops can download the data from the DTCO 4.1 and pass it on to the company.

If the data download is not possible, the workshops are instructed to certify this to the contractor accordingly.

⚠ ATTENTION

Data backup

- Archive the data or carefully keep the documentation for possible requests by control bodies.

■ Overvoltage/undervoltage

Supply voltages of the DTCO 4.1 which are too low or too high are shown in the standard display (a):

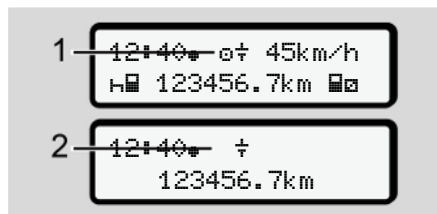


Fig. 131: Display - Fault in the supply voltage

IMPORTANT

If one of the card drawers is open during an over or undervoltage, do not insert a tachograph card.

Case 1: ⚡ (1) Overvoltage

IMPORTANT

In case of overvoltage the display is switched off and the buttons are locked.

The DTCO 4.1 continues to save activities. The functions printing or display of data and the insertion or withdrawal of a tachograph card are not possible.

Case 2: ⚡ (2) Low voltage

This case corresponds to a power interruption.

The standard display is shown.

The DTCO 4.1 cannot fulfil its role as a recording equipment! The driver's activities will not be recorded.

► Power interruption

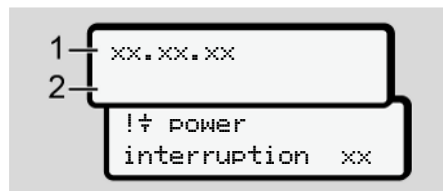


Fig. 132: Display – voltage interruption

After a voltage interruption, for approx. 5 seconds, the version of the operating software (1) and the version of the software upgrade module (2) are displayed.

Then the DTCO 4.1 indicates !
⚡ Voltage interruption.

⚠ ATTENTION

Continuous display of ⚡

- If the ⚡ symbol is displayed continuously with correct on-board voltage: Consult an authorised specialist workshop.
- When the DTCO 4.1 is defective, you are obligated to note activities with handwritten entries.
➔ *Recording activities manually* [p. 56]

■ Error card communication

If an error has occurred in the card communication, the driver is requested to remove their card.



Fig. 133: Display - Eject card

To do this, press the  button.

While the card is ejected, a new attempt is made to communicate with the card. If this attempt also fails, a printout of the last activities saved for this card is started.

IMPORTANT

With this printout, the driver can still document his activities.

The printout must be signed by the driver.

The driver can add all activities on the printout (except for driving times) until the driver card is inserted again.

IMPORTANT

The driver can create a daily printout of the vehicle unit and add and sign his additional activities until the driver card is inserted again.

IMPORTANT

For extended absences – e.g. During a daily of weekly rest time – the driver card should be removed from the card drawer.

■ Printer drawer defect

If the printer drawer is defect, it can be replaced.

- Contact an authorised specialist workshop.

■ Automatic ejection of tachograph card

If the DTCO 4.1 recognises a fault in the card communication, it tries to transfer the existing data to the tachograph card.

The driver is informed about the fault by the message **Eject card** and is requested to withdraw the driver card.

The printout of the activities last saved for the driver card is carried out automatically.

➔ *Recording activities manually* [▶ 56]

Technical data

DTCO 4.1

Paper roll

Technical data**■ DTCO 4.1**




DTCO 4.1	
Measurement range end value	220 km/h (according to Annex I C) 250 km/h (for other vehicle uses)
LC display	2 lines with 16 characters each
Temperature	Operational: -20 to +70 °C storage: -20 to +75 °C
Voltage	12 V or 24 V DC
Weight	600 g (+/- 50g)
Power consumption	Standby: 12 V: max. 30 mA; 24 V: max. 20 mA operational: 12 V: max. 5,0 A; 24 V: max. 4,2 A
EMV/ EMC	ECE R10
Thermal printing mechanism	Character size: 2.1 x 1.5 mm Print width: 24 characters/row Speed: approx. 15 – 30mm/sec. Printout of diagrams
Protection type	IP 54
DTCO 4.1 ADR ex variant	
Ex zone	Zone 2
Temperature class	T6 Operational: -20 to +65 °C

■ Paper roll

Environmental conditions	Temperature: -25 °C to +70 °C
Dimensions	Diameter: approx. 27.5 mm Width: 56.5 mm Length: approx. 8 m
Order no.	1381.90030300 Replacement paper rolls can be obtained from your local sales and service center.

IMPORTANT

Use only original VDO printer paper which bears the following markings:

- Tachograph type (DTCO 4.1) with test mark  **84**
- Approval mark  **174** or  **189**.

Appendix

Declaration of conformity/Authorisations

Optional accessories

VDO online shop

Appendix

■ Declaration of conformity/ Authorisations

<https://www.fleet.vdo.com/certificates> includes the following explanations and authorisations:

- KBA type approval (Kraftfahrt-Bundesamt = German Federal Vehicle Office)
- ATEX Certificate
- CE Declaration of conformity
- UKCA Explanation

EU Declaration of Conformity

1. Equipment

1a. Smart tachograph type DTCC 1381

2. Manufacturer

Continental Automotive Technologies GmbH
Heinrich-Hertz-Str. 45,
78052 Villingen-Schwenningen
Germany

2a. We as manufacturer hereby declare that the following described equipment when used for its intended purpose is in conformity with the relevant Union harmonization legislation: Directive No. 2014/53/EU (RED Directive) and if applicable Directive No. 2014/34/EU for equipment and protective systems for use in potentially explosive atmospheres.

3. Variants of the Equipment

3a. Variants with GNSS and DSRC:

DTCC 1381.xxxxx1x
DTCC 1381.xxxxx2x
DTCC 1381.xxxxx3x

3b. variants with GNSS only:

DTCC 1381.xxxxx4x
DTCC 1381.xxxxx5x
DTCC 1381.xxxxx6x

3c. variants for ADR vehicles:

DTCC 1381.2xxxxxx
DTCC 1381.3xxxxxx
DTCC 1381.4xxxxxx
DTCC 1381.7xxxxxx

4. EU type examination certificate

T.2021.04.0012

4a. Only applicable for RED certification (variants 3a. and 3b.)

TUV 03 ATEX 2324 X

4b. Only applicable for ADR variants (3c.)

5. Notified body

5a. Only applicable for RED certification (variants 3a. and 3b.):


CTC advanced GmbH, Untertuerkheimer Str. 6-10,
66117 Saarbrücken, Germany, CE 0882

5b. Only applicable for ADR variants (3c.):

TUV NORD CERT GmbH, Geschäftsstelle Hannover, Am TÜV 1,
30519 Hannover, Germany, CE 0044

6. Marking of the equipment

6a. Only applicable for ADR variants (3c.):

 II 3(2)G Ex ec [ib Gb] IIC T6 Gc

7. Used harmonized standards

7a. Applicable for the above mentioned variants (3a. and 3b.) according RED Directive:

ETSI EN 300 674-1 V1 2.1, ETSI EN 300 674-2 V2 1.1;
EN 303 413 V1 1.1;


ETSI EN 301 489-1 V2 2.0 (Draft);

ETSI EN 301 489-3 V2 1.1 (Final draft);

EN 62368-1; 2014/AC; 2015/A11; 2017

Continental Automotive Technologies GmbH | Villingen-Schwenningen | Postfach 1 69 | 78052 Villingen-Schwenningen
Tel. +49 (0)71 933 01 | Fax +49 (0)71 933 31 733
E-Mail: info@continental-automotive.com
Registered office: Hannover | Registered Court: Amtsgericht Hannover | HRB 58424 | USt-IdNr./VAT-IdNr.: DE254662583
Bank account: Deutsche Bank, Frankfurt | BIC: BFSW33HAN | Account No.: 684875300 | BIC: BFSW33HAN
IBAN: DE3325070010000687530

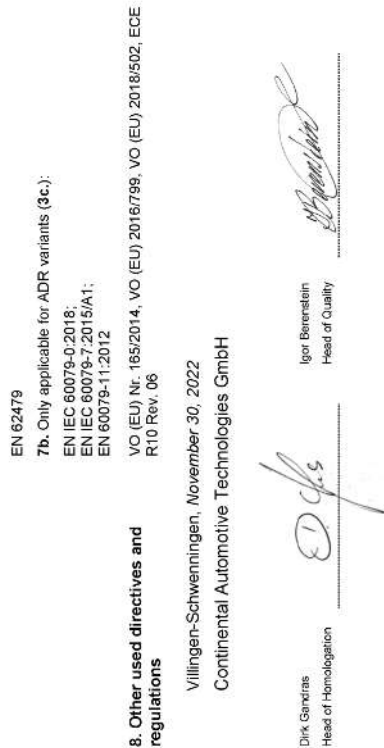Fig. 134: EU Declaration of Conformity – 1



9. This declaration certifies the conformity to the specified directives but does not imply any warranty for properties. The safety documentation accompanying the product shall be considered in detail.



<p>(FRA) Déclaration de conformité UE</p> <p>1. Appareil / 1a. Taghgraffig apparail / 2a. Nous déclarons par la présente, en tant que fabricant, que le dispositif mentionné ci-après, utilisé sous l'usage prévu, satisfait aux exigences de la directive n° 2014/53/UE (directive RED) et, si applicable, aux exigences de la directive n° 2014/34/UE concernant les appareils et les systèmes de protection destinés à être utilisés en atmosphères explosives / 3. Variantes d'appareil / 3a. Variantes avec GNSS et DSPRC / 3b. Variantes avec GNSS / 3c. Attestation d'examen de type UE / 4a. Examen applicable pour l'homologation radio des variantes répondant à la directive RED / 4b. 5b. 6a. 7b. Uniquement pour les variantes ADR / 5. Organisme notifié / 6. Identification des appareils / 7. Normes harmonisées utilisées / 7a. Appliqué pour toutes les variantes susmentionnées répondant à la directive RED / 8. Autres directives applicables / 9. Cette déclaration atteste la conformité avec les directives citées, mais ne constitue pas une garantie de qualité ou de durabilité conformément à l'article 443 du Code Civil allemand (BGB). Les indications de sécurité de la documentation livrée avec le produit doivent être respectées.</p>	
<p>(HUN) EU-megfelelősségi nyilatkozat</p> <p>1. Berendezések / 1a. DTCCO 1381 típusú intelligens tachográf / 2. Összefoglaló / 2a. Mi, mint gyártó ezúton kijelentjük, hogy az alábbiakban leírt berendezés rendelkezésszerű használatát megelőző a vonatkozó uniós harmonizációs jogszabályoknak 2014/53/EU (vagy RED-irányelv) és adott esetben a robbanásveszélyes légkörben használatú berendezésekkel 2014/34/EU (vagy RED-irányelv) / 3. A berendezés változatai / 3a. GNSS és DSPRC változatok / 3b. GNSS / 3c. A típusvizsgálati tanúsítvány / 4. EU-típusvizsgálati tanúsítvány / 4a. 5a. Csak RED-tanúsítvány esetén alkalmazható - változatok / 4b. 5b. 6a. Csak ADR-változatokra alkalmazható / 5. Megjelölt szervezet / 6. A berendezés jelölése / 7. Használt harmonizált szabványok / 7a. A fent említett változatokra alkalmazandó a RED-irányelv szerint / 8. Egyéb felhasználási irányelvek és rendelkezések / 9. Ez a nyilatkozat a megjelölt irányelvekkel való megfelelést igazolja, de nem jelent semmilyen garanciát a biztonságokra. A termékhez mellékelt biztonsági dokumentációt részletesen figyelembe kell venni.</p>	
<p>(ITA) Dichiarazione di conformità UE</p> <p>1. Apparecchio / 1a. Dispositivo di scrittura intelligente per corse DTCCO 1381 / 2. Produttore / 2a. Con la presente come produttore dichiariamo che il dispositivo descritto qui di seguito se utilizzato correttamente adempirà i requisiti della direttiva nr. 2014/53/UE (direttiva RED) e se applicabile adempirà i requisiti della direttiva nr. 2014/34/UE per gli apparecchi e i sistemi di protezione per l'uso in ambito a rischio di esplosione / 3. Varianti di apparecchiatura / 3a. Varianti con GNSS e DSPRC / 3b. Varianti con GNSS / 3c. Varianti ADR / 4. Attestato di certificazione del campione UE / 4a. 5a. Applicabile solo per l'autorizzazione radio delle varianti RED / 4b. 5b. 6a. 7b. Applicabile solo per varianti ADR / 5. Organismi notificati / 6. Designazione del dispositivo / 7. Norme armonizzate applicate / 7a. Applicabile a tutte le varianti sopra menzionate ai sensi della direttiva RED / 8. Altre direttive applicate / 9. La presente dichiarazione certifica la corrispondenza con le direttive menzionate. Essa comunque non rappresenta una garanzia di caratteristiche o responsabilità ai sensi del §443 del codice civile tedesco. Le indicazioni di sicurezza della documentazione del prodotto fornita devono essere rispettate.</p>	
<p>(LIT) ES atitikties deklaracija</p> <p>1. Prietaisas / 1a. Programuojamas tachografas, tipo DTCCO 1381 / 2. Gamintojas / 2a. Kaip gamintojas, deklaruojame, kad pagaminti pasiekę naudingumą taisy aišrytas įengymis atitinka direktyvos Nr. 2014/53/ES (RP direktyvos) reikalavimus, jei taikoma, direktyvos Nr. 2014/34/ES potencialiai sprogopie aplinkoje naudojamos įrangos ir apsaugos sistemos reikalavimus, / 3. Priešaraos variantai / 3a. Variantai su GNSS ir DSPRC / 3b. Variantai su GNSS / 3c. AD variantai / 4. ES tipo tyrimo sertifikatai / 4a. 5a. Taikomas tik RD variantų radio tyrimo leidimai / 4b. 5b. 6a. 7b. Taikomas tik ADR variantams / 5. Notifikuojami įstaigos / 6. Prietaiso deklaracija / 7. Tiksliai darydami standartinį / 7a. Taktinis vienas prieš tai įvardintoms variantams pagal RD direktyvą / 8. Kitos taikytos direktyvos / 9. Ši deklaracija aprašo įvairių, direktyvų atitinkam, bei ji nėra sąlyginė ir tinkamumo naudoti garantija BOB (Nacionalios civilinio kodekso) 443 § prasme. Būtinyje laikytis kartu pristatytose aprašymo ir tinkamumo naudoti sąlyginių, saugos nurodymų.</p>	

Fig. 137: EU Declaration of Conformity – 4



<p>(LAV) ES atbilstības deklarācija</p> <p>1. Ierīce / 1a. Intelligentā tabirotāte, tips DTCCO 1381 / 2. Ražotājs / 2a. Ar šo mēs kā ražotājs deklarējam, ka turpmāk aprakstīta iekārta, to iekļaujot atbilstošajam mērķim, atbilst Direktīvas Nr. 2014/53/EU (Direktīva par radiotelekomunikāciju ierīču RED direktīvu) prasībām un, ja attiecams, ar Direktīvas Nr. 2014/54/EU par iekārtām un aizsardzības sistēmām, kas paredzamas iekšējai sprādzienbīstamai vidi, prasībām / 3. Ierīces versijas / 3a. Versijas ar GNS5 un GNS3 / 3b. Versijas ar GNS5 / 3c. ADR versijas / 4. ES tipa pārbaudes sertifikāts / 4a. 5a. Pielikojams tikai RED versiju radio pārbaudīšanas ierīcēs / 4b. 5b. 6a. 7b. Pielikojams tikai ADR versijām / 5. Padziļinātā institūcija / 6. Ierīces apzīmējums / 7. Izstrādātāja atbilstošais standarts / 7a. Pielikojams visām iekārtām minētajām versijām saskaņā ar RED direktīvu / 8. Citas piemērotas atsauces / 9. Šī deklarācija atbilstoši minētajām direktīvām, tomēr tā nav garantija atbilstēt uz ierīces īpašībām vai derīguma termiņu atbilstoši BCB 443 pantam. Jāievēro piegādātā komplektā iekļautās produkta dokumentācijas drošības norādījumi.</p>	<p>(NLD) EU-conformiteitsverklaring</p> <p>1. Apparaat / 1a. Intelligenty tachograf typu DTCCO 1381 / 2. Producent / 2a. Hiermee verklaar wij als fabrikant, dat de hieronder beschreven inrichting bij doeltreffend gebruik voldoet aan de eisen van Richtlijn nr. 2014/53/EU (RED-richtlijn) en indien van toepassing aan de eisen van Richtlijn nr. 2014/54/EU voor apparaten en beveiligingssystemen voor het gebruik in explosiegevaarlijke omgevingen / 3. Apparaatvarianten / 3a. Varianten met GNS5 en DSRIC / 3b. Varianten met GNS5 / 3c. ADR-varianten / 4. Verklaring van EG-typetoets / 4a. 5a. Alleen van toepassing voor de radiotoetsing van RED-varianten / 4b. 5b. 6a. 7b. Alleen van toepassing voor ADR-varianten / 5. Erkende instantie / 6. Apparaatidentificatie / 7. Gebruikte geharmoniseerde normen / 7a. Toepasbaar voor alle hierboven genoemde varianten volgens de RED-richtlijn / 8. Andere toegepaste richtlijnen / 9. Deze verklaring bevestigt de overeenstemming met de genoemde richtlijnen, maar is geen garantie voor kwaliteit of duurzaamheid volgens §443 BCB (Duits Burgerlijk Wetboek). De veiligheidsinstructies van de megeleverde productdocumentatie moeten in acht worden genomen.</p>	<p>(POL) Deklaracja zgodności UE</p> <p>1. Urządzenie / 1a. Inteligentny tachograf typu DTCCO 1381 / 2. Producent / 2a. Niniejszym oświadczamy jako producent, że opisane poniżej urządzenie, jeśli są używane zgodnie z przeznaczeniem, spełnia wymagania dyrektywy 2014/53/EU (dyrektywa RED) oraz, jeśli ma to zastosowanie, wymagania dyrektywy 2014/54/EU dla urządzeń i systemów ochronnych przeznaczonych do użytku w przestrzeniach zagrożonych wybuchem / 3. Warianty urządzenia / 3a. Warianty z GNS5 i DSRIC / 3b. Warianty z GNS5 / 3c. Warianty ADR / 4. Certyfikat badania typu UE / 4a. 5a. Dotyczy tylko homologacji radiowej wariantów RED / 4b. 5b. 6a. 7b. Dotyczy tylko wariantów ADR / 5. Jednostka notyfikowana / 6. Oznaczenie urządzenia / 7. Zastosowane normy zharmonizowane / 7a. Dotyczy wszystkich wyżej wymienionych wariantów zgodnie z dyrektywą RED / 8. Inne zastosowane wytyczne / 9. Niniejsza deklaracja potwierdza zgodność z wymienionymi dyrektywami i wytycznymi, ale nie stanowi gwarancji jakości lub trwałości zgodnie z §443 niemieckiego kodeksu cywilnego BCB. Należy przestrzegać wskazówek bezpieczeństwa dostarczonych wraz z dokumentacją produktu.</p>	<p>(POR) Declaração de conformidade UE</p> <p>1. Aparelho / 1a. Tachógrafo digital inteligente do tipo DTCCO 1381 / 2. Fabricante / 2a. Ne qualidade de fabricante vimos, por este meio, declarar que o equipamento descrito em seguida, quando utilizado conforme a finalidade prevista, está em conformidade com os requisitos da diretiva n.º 2014/53/UE (diretiva RED) e, quando aplicável, com os requisitos da diretiva n.º 2014/54/UE relativa a equipamentos e sistemas de proteção para utilização em áreas potencialmente explosivas / 3. Variantes do aparelho / 3a. Variantes com GNS5 e DSRIC / 3b. Variantes com GNS5 / 3c. Variantes ADR / 4. Certificado de exame de tipo da UE / 4a. 5a. Aplicável apenas a autorização da transmissão rádio das variantes RED / 4b. 5b. 6a. 7b. Aplicável apenas a variantes ADR / 5. Organismo notificado / 6. Identificação do aparelho / 7. Normas harmonizadas aplicadas / 7a. Aplicável a todas as variantes supracitadas segundo a Diretiva RED / 8. Outras diretivas aplicadas / 9. Esta declaração certifica a conformidade com as diretivas mencionadas, no entanto não representa qualquer garantia de qualidade ou durabilidade segundo o §443 do Código Civil alemão. As indicações de segurança da documentação do produto juntamente fornecida têm de ser respeitadas.</p>
---	--	--	--

596

Continental Automotive Technologies GmbH | Volkswagenstr. 24a | D-30455 Hannover | Telefon +49 (0)511 321 31 70 | Fax +49 (0)511 321 31 70 | E-Mail info@continental-automotive.com
 Registered office: Hannover | Registered Court: Amtsgericht Hannover | HRB 59424 | USt-IdNr. DE215465063
 Tax identification number: 25/15465063 | VAT identification number: DE215465063
 Bank account: Deutsche Bank, Frankfurt | BIC: BFSW33HAN | Account No.: 880627523 | IBAN: 56070010
 IBAN: 3215465070 | 0006887800

Fig. 138: EU Declaration of Conformity – 5



<p>(ROU) Declarație de conformitate UE</p> <p>1. Aparat / 1a. Tehnograf inteligent de tip DTCC 1381 / 2. Producător / 2a. Prin prezenta, declarăm ca producător că echipamentul descris mai jos, alături de toate celelalte componente destinate pentru utilizare în conformitate cu Directiva 2014/53/UE privind echipamentele și sistemele de comunicații pentru utilizare în atmosferă potențial explozivă / 3a. Varianta cu GNSS și DSRC / 3b. Varianta cu GNSS / 3c. Variante ADR / 4. Certificatul de examinare UE de tip / 4a. 5a. Se aplică numai pentru omologarea radio a varianta RED / 4b. 5b. 6a. 7b. Se aplică numai pentru varianta ADR / 5. Organismul notificat / 6. Marcarea aparatelor / 7. Standarde armonizate aplicabile / 7a. Se aplică pentru toate variantele menționate mai sus, conform Directivei RED / 8. Alte directive aplicabile / 9. Acasă declarare certificată de conformitate cu Directiva nominalizată, însă nu reprezintă o garanție a calității sau durabilității conform art. 44(3) Codul civil german. Trebuie respectate indicațiile de siguranță din documentația produsului, livrată odată cu acesta.</p>	<p>(SLK) ES vyhlásenie o zhode</p> <p>1. Zariadenie / 1a. Inteligentný tachograf typu DTCC 1381 / 2. Výrobca / 2a. Týmto mý, ako výrobca, vyhlasujem, že nasledujúce opísané zariadenie spĺňa pri použití v súlade s určením požiadavky smernice č. 2014/53/EÚ (Smernica o súpravnosti) a ak je ju možné aplikovať, aj požiadavky smernice č. 2014/34/EÚ pre prístroje a ochranné systémy určené na použitie v potenciálne výbušnej atmosfére / 3. Varianty prístroja / 3a. Varianty s GNSS a DSRC / 3b. Varianty s GNSS / 3c. Varianty ADR / 4. Certifikát EÚ o preskúšaní typu / 4a. 5a. Možno použiť iba pre osvedčenie pre rád. zariadenia variant RED / 4b. 5b. 6a. 7b. Možno použiť iba pre varianty ADR / 5. Menované miesto / 6. Označenie prístroja / 7. Použitie harmonizované normy / 7a. Možno použiť pre všetky hore uvedené varianty podľa smernice RED / 8. Ostatné použité smernice / 9. Toto vyhlásenie potvrdzuje zhodu s uvedenými smernicami, nie je však zárukou vlastností ani skutočnosti podľa §443 Občianskeho zákonníka (BGB). Je potrebné dodržiavať bezpečnostné upozornenia uvedené v dodanej dokumentácii výrobku.</p>	<p>(SLV) EU Izjava EU o skladnosti</p> <p>1. Naprava / 1a. Inteligentni tahograf tipa DTCC 1381 / 2. Proizvajalec / 2a. S to izjavo kot proizvajalec izjavljamo, da v nadaljevanju opisana naprava o pravilni uporabi izpolnjuje zahtevne Direktive 2014/53/EU (Direktiva RED) in, če se ta uporablja, tudi zahtevne Direktive 2014/34/EU v zvezi z opremo in zaščitnimi sistemi, namenjenimi za uporabo v potencialno eksplozivnih atmosferah / 3. Različice naprave / 3a. Različice z GNSS in DSRC / 3b. Različice z GNSS / 3c. Različice ADR / 4. Certifikat o EU pregledu tipa / 4a. 5a. Uporablja se samo za radijska dovoljenja za različice RED / 4b. 5b. 6a. 7b. Uporablja se samo za vse zgoraj navedene različice v skladu s Direktivo RED / 8. Druge uporabljen harmonizirani standard / 7a. Uporablja se za vse zgoraj navedene različice v skladu s Direktivo RED / 8. Druge uporabljen harmonizirani standard / 7a. Skladnost z navedenimi direktivami, vendar pa ne predstavlja garancije glede kakovosti ali trajnosti v skladu s §443 BGB. Upoštevati je treba varnostne napotke v priloženi dokumentaciji izdelka.</p>
---	--	--

Continental Automotive Technologies GmbH | Weyersdorfer Strasse 9 | 30765 Hannover | (Produkt) 160 | 30000 Hannover
 Registered office | Hannover | (Registrierungsamt) Amtsgericht Hannover | HRB 240411 | (USt-Id-Nr.) USt-Id-Nr. DE240411
 Bank account | Deutsche Bank | (Bank für Kontokorrent) Kontokorrent | IBAN: 25120510000000000000000000
 IBAN: DE35500700000000000000000000

Fig. 139: EU Declaration of Conformity – 6

■ Optional accessories

► DLKPro Download Key S



You can use the DLKPro download key to legally download and archive data from the DTCO 4.1.

Order number: **2910002165200** with enabling the card reader.

► DLKPro TIS-Compact S



Using the DLKPro TIS-Compact S, you can legally download, archive and visualise data from the DTCO 4.1 and from the driver card.

Order Numbers:

- Europe – **2910002165300** with enabling the card reader.
- Europe (EE) – **2910002165400** with enabling the card reader.

► Remote DL 4G



Using the Remote DL 4G of VDO, you can transfer download data via GPRS to your fleet management system or an evaluation software.

Order number: **2910002759400**

► Cleaning cards and cleaning wipes

Use the cleaning cards to clean the card drawers with the DTCO 4.1 .

The cleaning wipes serve for the cleaning of your driver and/or company cards.

Order Numbers:

- Cleaning cards (12 cards):
A2C5951338266
- Cleaning wipes (12 wipes):
A2C5951184966
- Set of cleaning wipes (6 cards/ 6 wipes):
A2C5951183866

■ VDO online shop

The online shop for VDO products and services is located at:
www.fleet.vdo.com.

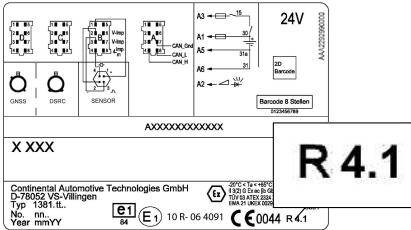
Change overview

Release overview

Change overview

■ Release overview

These operating instructions are valid for the following DTCO version:

Release status (can be seen on the nameplate)	Operating instructions	Modification of the operating manual
	BA00.1381.41 100 102	First release

IMPORTANT

For the release status of the tachograph, please see the printout "*Technical data*".

IMPORTANT

This instruction manual is not suitable for older versions of the DTCO.

Index

A

Abort entry	54
Access Rights	27
Activities	
adding - when card inserted	50
Enter and add rest time	60
Addition	
Manual entry	58
manually - when card inserted	50
ADR variant	20, 23
Registration number	20
AETR Agreement	10
ATEX Certificate	154
Authorisations	154

B

Bluetooth	22
Activating / deactivating	93
Symbol	20
Border crossing	30
manually	53
Brightness	21

C

Cabotage	57
Calibration	24
card	
Handling	45
plug	42
remove	44
request	59
Card drawer	20, 21
CE Explanation	154
Certificate - message process	107
Change activity	21
Cleaning	144
cleaning cards (accessories)	162
cleaning wipes (accessories)	162
Clear paper jam	120
Combination button	20, 21
Company (operating mode)	24
Company card	
Data	29
Display number	99
First insertion	68
Functions of the company card	67
remove	72
Compulsory tachograph inspections	144
Contact partner	11
Contact person	11
Contrast	21

Control (operating mode)	24
Control card	27
Country - when card inserted	51
Country entry - manual	53
Country symbols	
Spanish regions	37
Table with overview	37
Crew operation	11, 63

D

Data	
Download from mass data	47
downloading	46
Identification	46
Protection of personal data	64
Data backup by the workshop	147
Data protection	9
Data storage	29, 30
Digital signature	46
Dimming	21, 23
Display	20, 21

Driver 1/ Driver 2	98
Driving and rest periods	41
Low voltage / overvoltage	147
Standard displays during journey	40
VDO Counter (option)	111
vehicle	99
When driving	40
when the vehicle is stationary	75
Displaying the times of the driver card	76
DLKPro Download Key S	161
DLKPro TIS-Compact S	161
Download Key S	161
Driver / vehicle change	
Inserting cards	63
Mixed operation	63
Shift end	63
Driver 1 definition	11
Driver card	
Data	29
Description	26
First insertion	52, 64
Functions	49
Obligations of the driver	16
remove	57
Validity	17
Driving and rest periods	41
Driving time warning	111

Message	103
DTCO version	99

E

EC 2006/22	16
EC 561/2006	16
Enter Loading	57
Enter Unloading	57
Enter vehicle registration number	70
With app	23
Entry	
Driver 1/ Driver 2 - country	91
Driver 1/ driver 2 - start country	91
end country	92
Ferry / train	95
Local time	96
Local time company	97
Unlocking additional functions	97
Vehicle - out start/end	94
Error messages	102, 110
EU 165/2014	16
Events - overview	107
Ex-device	23

F

Faults

Message	102
Overview	110
Ferry / train	
Entry	95
Message	104
Front interface	10, 20, 22

I

Ignition off - display	42
Ignition on - Display	40
Intended use	18
ITS Data	10
Release	64

L

Language	
Displayed language	44
Set manually	76
When card inserted	49
Leave scope (out)	104
Load/unload - Menu	96
Local time - when card inserted	51
Local time company Entry	97
Lock menu access	86
Log in the company	69

M

Manual addition	
When card inserted.....	50
Manual entry.....	58
Continuing activities.....	61
Correction possibility.....	58
Precede activities with others activities	62
Mass memory	30
Definition.....	11
Downloading data	47
Menu buttons.....	20, 21
In the Menu.....	42
Menu functions	
Leaving - automatically.....	86
Leaving - manually.....	86
navigate	84
Menu levels	83
Menu structure	83
Messages	102, 114
Causes.....	42
Confirm	103
Display in the display	42
Fault.....	110
Ferry / train	104
Meaning	102
Mixed operation	10

N

NUTS0	30
-------------	----

O

Online Shop	162
Operational (operating mode)	24
Out (leave scope).....	104
Out of Scope	11
enter	94

P

Permitted total weight.....	99
Personal data	10
change.....	92, 93
Pictograms	
Combinations.....	34
Overview.....	32
Print	
Activities	88
cancel	119
Events.....	87
start.....	118
Print: Daily value	87
Printer.....	20
Printout	

Daily value	88
Driver 1/ Driver 2	87
Events [vehicle]	89
Information tachograph cards	89
Rpm profiles (option)	91
Speed profiles (option)	90
Speeding events	89
Status D1/ D2 (option)	90
Technical data	89
v-diagram	90
Vehicle	88
Production status - display	103

R

Recording activities manually	56
Release overview	164
Remote control	22
Remote DL 4G	161
Remote-controlled download	47
Replace printer paper	119

S

Service partner	11
Set activities automatically	38, 55
Setting activities	55

Change activity	55
When card inserted	52
Shift start	49
Signature data	46
Software version	99
Standard display (a)	40
Standard displays	75
Stand-by	23
Symbol - Pictograms	32

T

tachograph card	26
Automatic ejection	149
Cleaning	144
plug	42
remove	44
Target group	11
Technical data	151
Time zones	31

U

UKCA Explanation	154
UTC time	31

V

VDO Counter	
-------------	--

Description	77
Description of the display	78
Display	41
Display daily values	81
Display weekly values	82
Displays for rest time activity	80
Displays for working time activity	81
Status display	82
VDO Data	10
Release	65
Vehicle weight	99
Voltage interruption	148


W

Warning - Driving time	111
Working time warning	111
Workshop card	27

Continental Automotive Technologies GmbH
P.O. Box 1640
78006 Villingen-Schwenningen
Germany
www.fleet.vdo.com

AAA2242730000 / AAA2242730029
70122052 SPE 000 AA
BA00.1381.41 100 102
Language: English

Version 041



VDO
Smart on the Road